

# CKCM25JB1A473M060AA

TDK Item Description : CKCM25JB1A473MT\*\*\*\*\*




## Application & Main Feature


Commercial Grade ( 2 in 1 Array )

## Series


CKCM25

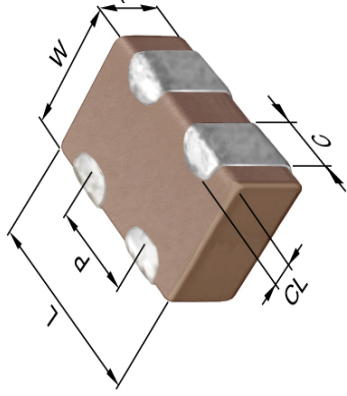


## DC Bias Characteristic

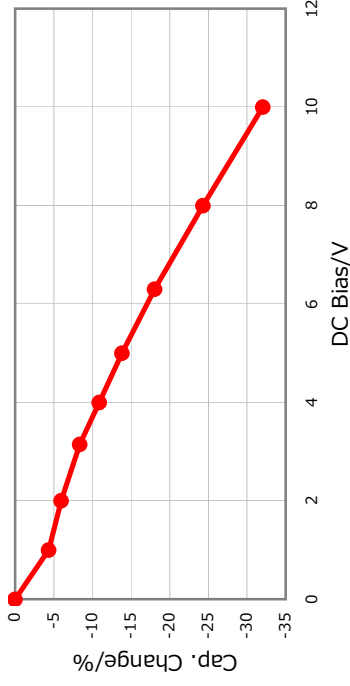


## |Z|, ESR vs. Freq. Characteristics

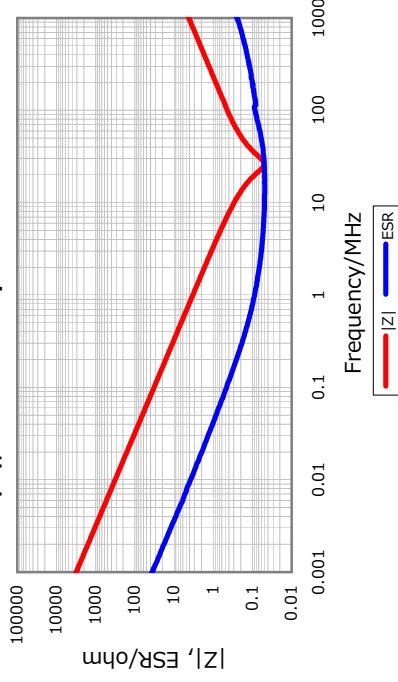


## Cap. vs. Freq. Characteristic

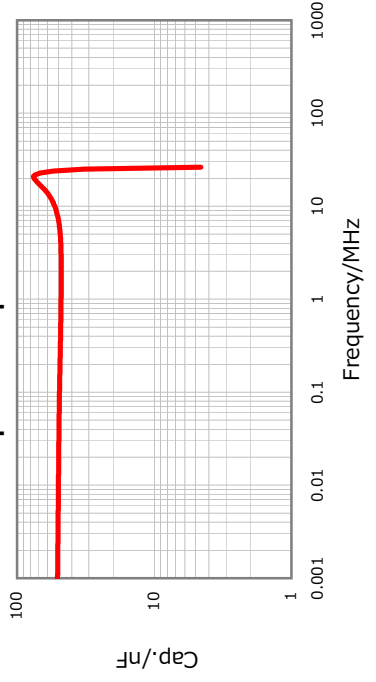

## Temperature Characteristics

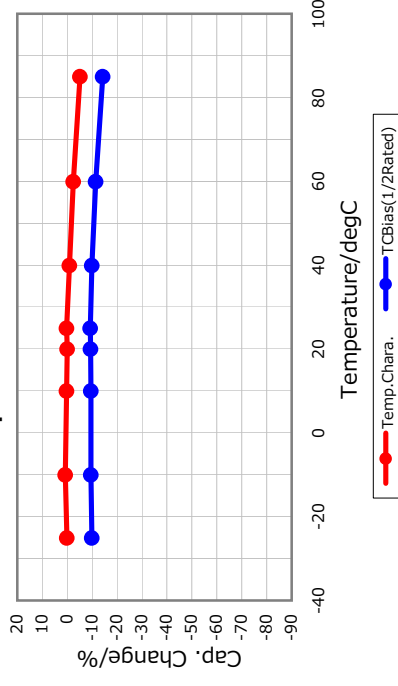

## Ripple Temperature Rise Characteristics

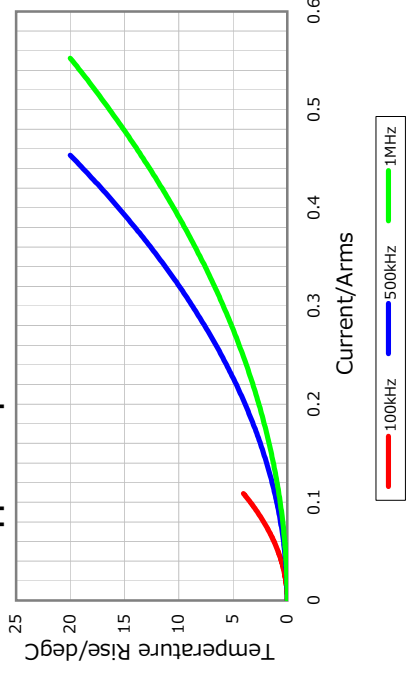

## Dimensions

- L 1.37mm +/-0.15mm
- W 1.00mm +/-0.15mm
- T 0.60mm +/-0.1mm
- C 0.36mm Nom.
- P 0.64mm Nom.

## Temperature Characteristic

JB (-25 to 85 degC +/-10%)

## Rated Voltage

1A (10Vdc)

## Capacitance

47nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

5% Max.

## Insulation Resistance

2.13Gohm Min.

## AEC-Q200

Not Applicable



All specifications are subject to change without notice.

January 4, 2016