


TDK item description C3216C0G2J122JT****

| | |
|---------------------|---|
| Applications | Commercial Grade Please refer to Part No. CGA5F4C0G2J122J085AA for Automotive use. |
| Feature | Mid Voltage (100 to 630V) |
| Series | C3216 [EIA 1206] |
| Status | Production |

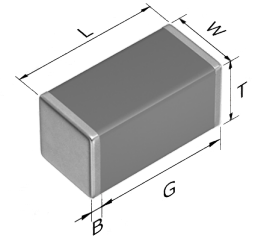






| Size | |
|-------------------------------|------------------------------------|
| Length(L) | 3.20mm ±0.20mm |
| Width(W) | 1.60mm ±0.20mm |
| Thickness(T) | 0.85mm ±0.15mm |
| Terminal Width(B) | 0.20mm Min. |
| Terminal Spacing(G) | 1.00mm Min. |
| Recommended Land Pattern (PA) | 2.10mm to 2.50mm(Flow Soldering) |
| | 2.00mm to 2.40mm(Reflow Soldering) |
| Recommended Land Pattern (PB) | 1.10mm to 1.30mm(Flow Soldering) |
| | 1.00mm to 1.20mm(Reflow Soldering) |
| Recommended Land Pattern (PC) | 1.00mm to 1.30mm(Flow Soldering) |
| | 1.10mm to 1.60mm(Reflow Soldering) |

| Electrical Characteristics | |
|------------------------------|-----------------|
| Capacitance | 1.2nF ±5% |
| Rated Voltage | 630VDC |
| Temperature Characteristic | C0G(0±30ppm/°C) |
| Q (Min.) | 1000 |
| Insulation Resistance (Min.) | 10000MΩ |

| Other | |
|------------------|------------------------------------|
| Soldering Method | Wave (Flow) |
| | Reflow |
| AEC-Q200 | NO |
| Packing | Punched (Paper)Taping [180mm Reel] |
| Package Quantity | 4000pcs |

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

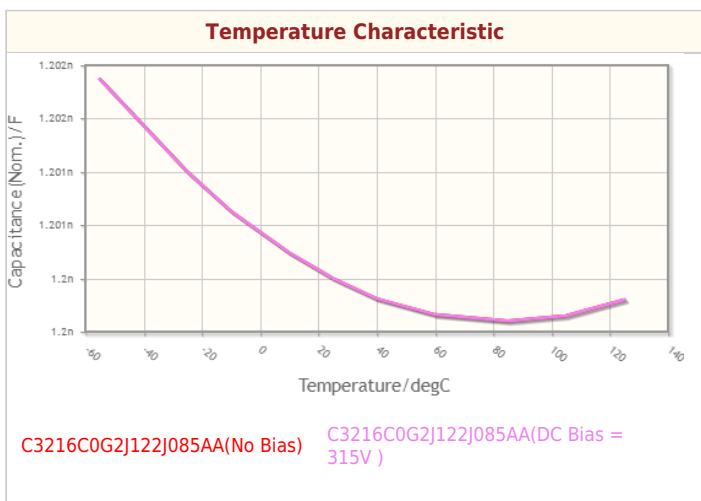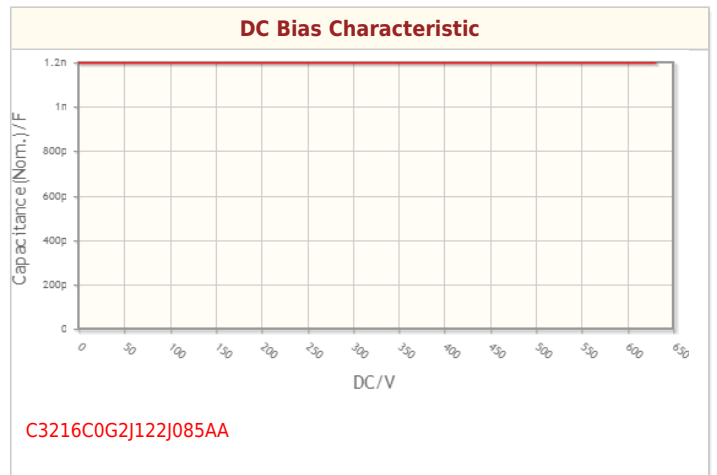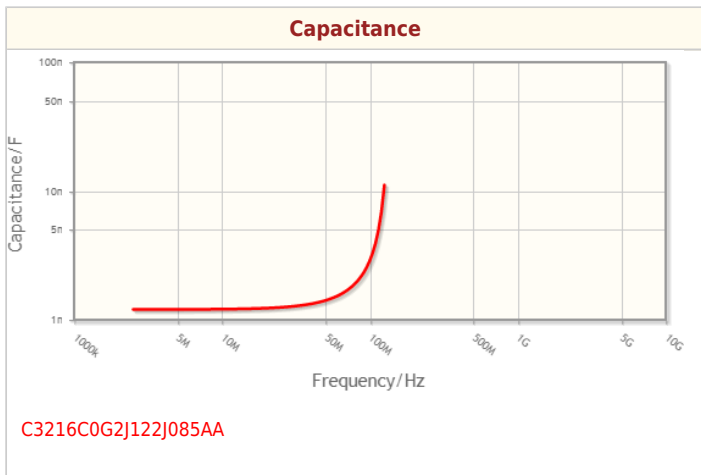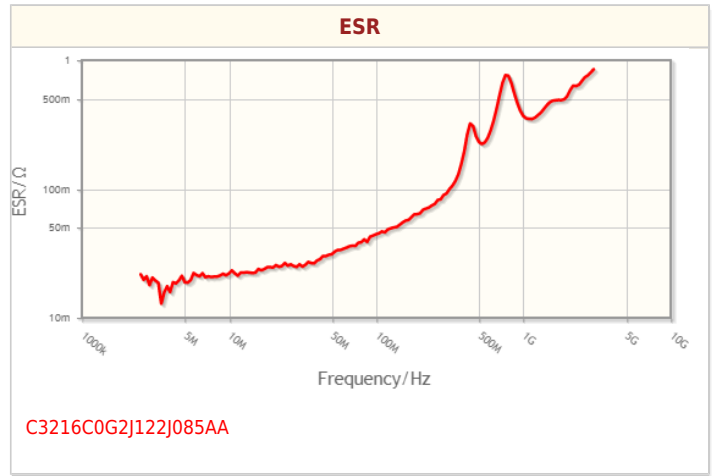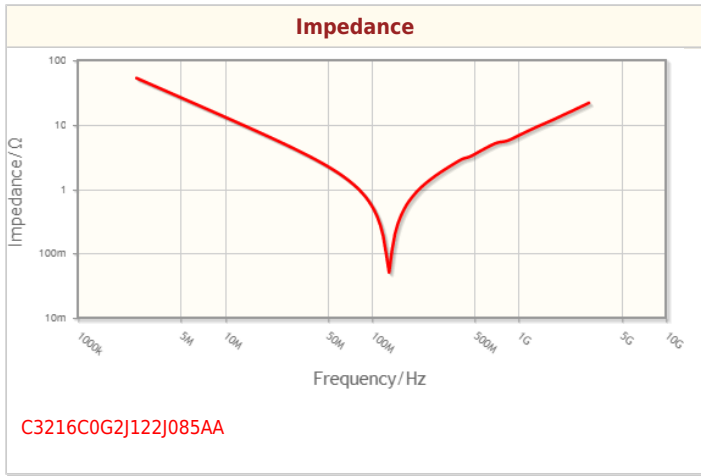

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

