


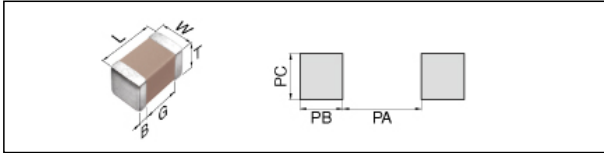


CGA5L1X7T2J473K160AC (TDK item description : CGA5L1X7T2J473KT****)

Applications		Automotive Grade
Feature		Mid Voltage (100 to 630V)
		AEC-Q200
Series	CGA5(3216) [EIA CC1206]	



Size	
Length(L)	3.20mm +/-0.20mm
Width(W)	1.60mm +/-0.20mm
Thickness(T)	1.60mm +/-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	1.00mm Min.
Recommended Land Pattern(PA)	2.10 to 2.50mm (Flow Soldering) 2.00 to 2.40mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.10 to 1.30mm (Flow Soldering) 1.00 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PC)	1.00 to 1.30mm (Flow Soldering) 1.10 to 1.60mm (Reflow Soldering)
Recommended Slit Pattern(SD)	


Electrical Characteristics	
Capacitance	47nF +/-10%
Rated Voltage	630Vdc
Temperature Characteristic	X7T(+22,-33%)
Dissipation Factor	2.5% Max.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow, Flow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CGA5L1X7T2J473K160AC


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

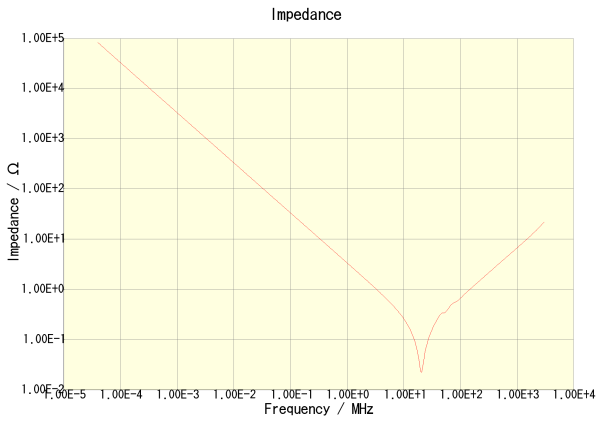


CGA5L1X7T2J473K160AC

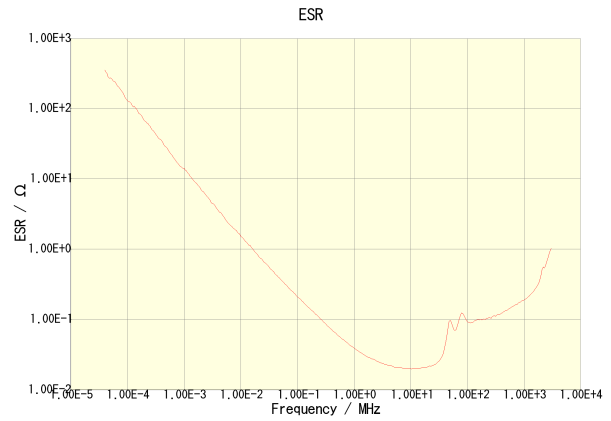


CGA5L1X7T2J473K160AC

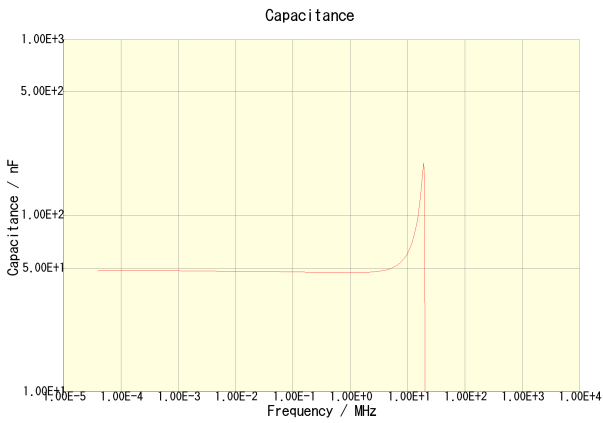


CGA5L1X7T2J473K160AC

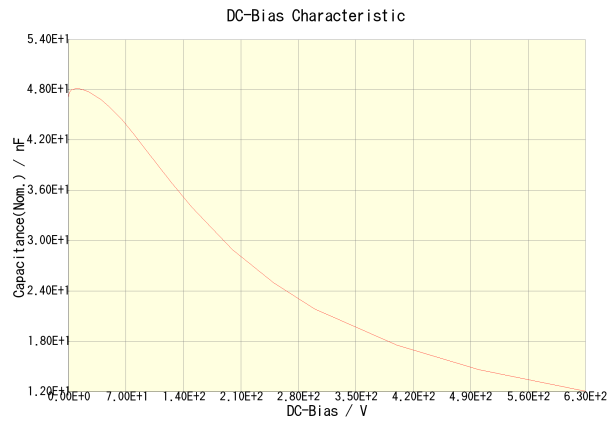

CGA5L1X7T2J473K160AC

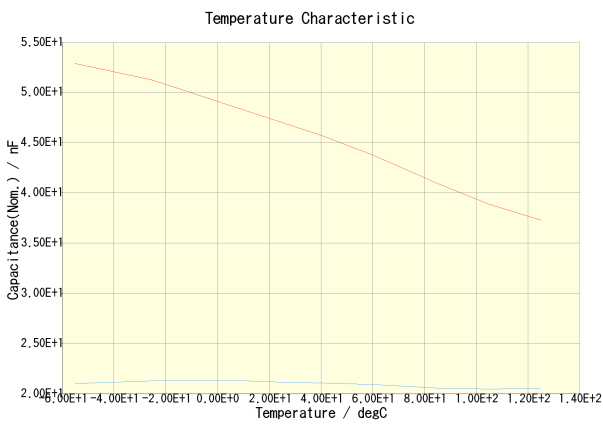

CGA5L1X7T2J473K160AC(DC Bias = 0V) CGA5L1X7T2J473K160AC(DC Bias = 315V)

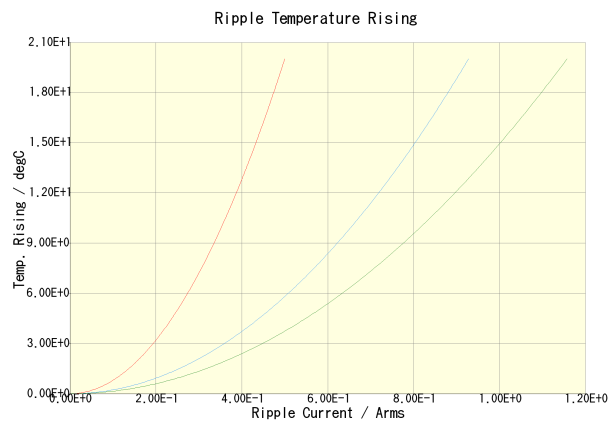

CGA5L1X7T2J473K160AC(100kHz) CGA5L1X7T2J473K160AC(500kHz)
CGA5L1X7T2J473K160AC(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.