

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Chip Monolithic Ceramic Capacitors for Automotive



for Automotive GCM Series

■ Features

1. The GCM series meet AEC-Q200 requirements.
2. Higher resistance of solder-leaching due to the Ni-barriered termination, applicable for reflow-soldering, and flow-soldering (GCM18/21/31 type only).
3. The operating temperature range of R7/C7/5C series: -55 to 125 degrees C, and R9/L8/5G series: -55 to 150 degrees C.
4. A wide selection of sizes is available, from miniature LxWxT:0.6x0.3x0.3mm to LxWxT: 3.2x2.5x2.5mm.
5. The GCM series is available in paper or embossed tape and reel packaging for automatic placement.
6. The GCM series is lead free product.



Part Number	Dimensions (mm)				
	L	W	T	e	g min.
GCM033	0.6 ±0.03	0.3 ±0.03	0.3 ±0.03	0.1 to 0.2	0.2
GCM155	1.0 ±0.05	0.5 ±0.05	0.5 ±0.05	0.15 to 0.3	0.4
GCM188*	1.6 ±0.1	0.8 ±0.1	0.8 ±0.1	0.2 to 0.5	0.5
GCM216			0.6 ±0.1		
GCM219	2.0 ±0.15	1.25 ±0.15	0.85 ±0.1	0.2 to 0.7	0.7
GCM21B			1.25 ±0.15		
GCM319	3.2 ±0.15	1.6 ±0.15	0.85 ±0.1		
GCM31M			1.15 ±0.1	0.3 to 0.8	1.5
GCM31C	3.2 ±0.2	1.6 ±0.2	1.6 ±0.2		
GCM32N			1.35 ±0.15		
GCM32R			1.8 ±0.2		2.0
GCM32D	3.2 ±0.3	2.5 ±0.2	2.0 ±0.2	0.3	
GCM32E			2.5 ±0.2		1.0

* Bulk Case : 1.6 ±0.07(L)×0.8 ±0.07(W)×0.8 ±0.07(T)

■ Applications

Automotive electronic equipment (Power-train, safety equipment)

Temperature Compensating Type GCM15 Series

Part Number	GCM15
L x W [EIA]	1.00x0.50 [0402]
TC	COG (5C)
Rated Volt.	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)	
0.50pF(R50)	0.50(5)
0.75pF(R75)	0.50(5)
1.0pF(1R0)	0.50(5)
1.2pF(1R2)	0.50(5)
1.5pF(1R5)	0.50(5)
1.8pF(1R8)	0.50(5)
2.0pF(2R0)	0.50(5)
2.2pF(2R2)	0.50(5)
2.7pF(2R7)	0.50(5)
3.0pF(3R0)	0.50(5)
3.3pF(3R3)	0.50(5)
3.9pF(3R9)	0.50(5)
4.0pF(4R0)	0.50(5)
4.7pF(4R7)	0.50(5)
5.0pF(5R0)	0.50(5)
5.6pF(5R6)	0.50(5)
6.0pF(6R0)	0.50(5)
6.8pF(6R8)	0.50(5)
7.0pF(7R0)	0.50(5)
8.0pF(8R0)	0.50(5)
8.2pF(8R2)	0.50(5)
9.0pF(9R0)	0.50(5)
10pF(100)	0.50(5)

Continued on the following page.



⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

↳ Continued from the preceding page.

1

Part Number	GCM15	
L x W [EIA]	1.00x0.50 [0402]	
TC	COG (5C)	
Rated Volt.	50 (1H)	
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)		
12pF(120)	0.50(5)	
15pF(150)	0.50(5)	
18pF(180)	0.50(5)	
22pF(220)	0.50(5)	
27pF(270)	0.50(5)	
33pF(330)	0.50(5)	
39pF(390)	0.50(5)	
47pF(470)	0.50(5)	
56pF(560)	0.50(5)	
68pF(680)	0.50(5)	
82pF(820)	0.50(5)	
100pF(101)	0.50(5)	
120pF(121)	0.50(5)	
150pF(151)	0.50(5)	
180pF(181)	0.50(5)	
220pF(221)	0.50(5)	
270pF(271)	0.50(5)	
330pF(331)	0.50(5)	
390pF(391)	0.50(5)	
470pF(471)	0.50(5)	

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

Temperature Compensating Type GCM18 Series

Part Number	GCM18			
L x W [EIA]	1.60x0.80 [0603]			
TC	COG (5C)		X8G (5G)	
Rated Volt.	100 (2A)	50 (1H)	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)				
0.50pF(R50)	0.80(8)	0.80(8)		
0.75pF(R75)	0.80(8)	0.80(8)		
1.0pF(1R0)	0.80(8)	0.80(8)		
1.2pF(1R2)	0.80(8)	0.80(8)		
1.5pF(1R5)	0.80(8)	0.80(8)		
1.8pF(1R8)	0.80(8)	0.80(8)		
2.0pF(2R0)	0.80(8)	0.80(8)		
2.2pF(2R2)	0.80(8)	0.80(8)		
2.7pF(2R7)	0.80(8)	0.80(8)		
3.0pF(3R0)	0.80(8)	0.80(8)		
3.3pF(3R3)	0.80(8)	0.80(8)		
3.9pF(3R9)	0.80(8)	0.80(8)		
4.0pF(4R0)	0.80(8)	0.80(8)		
4.7pF(4R7)	0.80(8)	0.80(8)		
5.0pF(5R0)	0.80(8)	0.80(8)		
5.6pF(5R6)	0.80(8)	0.80(8)		
6.0pF(6R0)	0.80(8)	0.80(8)		
6.8pF(6R8)	0.80(8)	0.80(8)		
7.0pF(7R0)	0.80(8)	0.80(8)		

Continued on the following page. ↗

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

Part Number	GCM18			
L x W [EIA]	1.60x0.80 [0603]			
TC	COG (5C)		X8G (5G)	
Rated Volt.	100 (2A)	50 (1H)	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)				
8.0pF(8R0)	0.80(8)	0.80(8)		
8.2pF(8R2)	0.80(8)	0.80(8)		
9.0pF(9R0)	0.80(8)	0.80(8)		
10pF(100)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
12pF(120)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
15pF(150)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
18pF(180)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
22pF(220)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
27pF(270)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
33pF(330)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
39pF(390)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
47pF(470)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
56pF(560)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
68pF(680)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
82pF(820)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
100pF(101)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
120pF(121)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
150pF(151)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
180pF(181)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
220pF(221)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
270pF(271)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
330pF(331)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
390pF(391)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
470pF(471)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
560pF(561)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
680pF(681)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
820pF(821)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
1000pF(102)	0.80(8)	0.80(8)	0.80(8)	0.80(8)
1200pF(122)		0.80(8)		0.80(8)
1500pF(152)		0.80(8)		0.80(8)
1800pF(182)		0.80(8)		0.80(8)
2200pF(222)		0.80(8)		0.80(8)
2700pF(272)		0.80(8)		0.80(8)

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

Temperature Compensating Type GCM21 Series

Part Number	GCM21			
L x W [EIA]	2.00x1.25 [0805]			
TC	COG (5C)		X8G (5G)	
Rated Volt.	100 (2A)	50 (1H)	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)				
7.0pF(7R0)	0.85(9)	0.60(6)		
8.0pF(8R0)	0.85(9)	0.60(6)		
8.2pF(8R2)	0.85(9)	0.60(6)		
9.0pF(9R0)	0.85(9)	0.60(6)		
10pF(100)	0.85(9)	0.60(6)		
12pF(120)	0.85(9)	0.60(6)		

Continued on the following page. ↗



△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

1

Part Number	GCM21			
L x W [EIA]	2.00x1.25 [0805]			
TC	COG (5C)		X8G (5G)	
Rated Volt.	100 (2A)	50 (1H)	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)				
15pF(150)	0.85(9)	0.60(6)		
18pF(180)	0.85(9)	0.60(6)		
22pF(220)	0.85(9)	0.60(6)		
27pF(270)	0.85(9)	0.60(6)		
33pF(330)	0.85(9)	0.60(6)		
39pF(390)	0.85(9)	0.60(6)		
47pF(470)	0.85(9)	0.60(6)		
56pF(560)	0.85(9)	0.60(6)		
68pF(680)	0.85(9)	0.60(6)		
82pF(820)	0.85(9)	0.60(6)		
100pF(101)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
120pF(121)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
150pF(151)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
180pF(181)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
220pF(221)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
270pF(271)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
330pF(331)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
390pF(391)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
470pF(471)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
560pF(561)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
680pF(681)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
820pF(821)	0.60(6)	0.60(6)	0.60(6)	0.60(6)
1000pF(102)	0.85(9)	0.60(6)	0.85(9)	0.60(6)
1200pF(122)	0.85(9)	0.60(6)	0.85(9)	0.60(6)
1500pF(152)	0.85(9)	0.60(6)	0.85(9)	0.60(6)
1800pF(182)		0.60(6)		0.60(6)
2200pF(222)		0.60(6)		0.60(6)
2700pF(272)		0.60(6)		0.60(6)
3300pF(332)		0.60(6)		0.60(6)
3900pF(392)		0.60(6)		0.60(6)
4700pF(472)		0.60(6)		0.60(6)
5600pF(562)		0.85(9)		0.85(9)
6800pF(682)		0.85(9)		0.85(9)
8200pF(822)		0.85(9)		0.85(9)
10000pF(103)		0.85(9)		0.85(9)

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

Temperature Compensating Type GCM31 Series

Part Number	GCM31	
L x W [EIA]	3.20x1.60 [1206]	
TC	COG (5C)	
Rated Volt.	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)		
12pF(120)	0.85(9)	
15pF(150)	0.85(9)	
18pF(180)	0.85(9)	
22pF(220)	0.85(9)	

Continued on the following page. 

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

Part Number	GCM31	
L x W [EIA]	3.20x1.60 [1206]	
TC	COG (5C)	
Rated Volt.	100 (2A)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)		
27pF(270)	0.85(9)	
33pF(330)	0.85(9)	
39pF(390)	0.85(9)	
47pF(470)	0.85(9)	
56pF(560)	0.85(9)	
68pF(680)	0.85(9)	
82pF(820)	0.85(9)	
100pF(101)	0.85(9)	
120pF(121)	0.85(9)	
150pF(151)	0.85(9)	
180pF(181)	0.85(9)	
220pF(221)	0.85(9)	
270pF(271)	0.85(9)	
330pF(331)	0.85(9)	
390pF(391)	0.85(9)	
470pF(471)	0.85(9)	
560pF(561)	0.85(9)	0.60(6)
680pF(681)	0.85(9)	0.60(6)
820pF(821)	1.15(M)	0.85(9)
1000pF(102)	0.85(9)	0.85(9)
1200pF(122)	0.85(9)	0.85(9)
1500pF(152)	0.85(9)	0.85(9)
1800pF(182)	0.85(9)	0.85(9)
2200pF(222)	0.85(9)	0.85(9)
2700pF(272)	0.85(9)	0.85(9)
3300pF(332)	0.85(9)	0.85(9)
3900pF(392)	0.85(9)	0.85(9)
4700pF(472)	0.85(9)	0.85(9)
5600pF(562)	0.85(9)	0.85(9)
6800pF(682)		0.85(9)
8200pF(822)		0.85(9)
10000pF(103)		0.85(9)
12000pF(123)		0.85(9)
15000pF(153)		0.85(9)
18000pF(183)		0.85(9)
22000pF(223)		0.85(9)

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

High Dielectric Constant Type, X7R (R7) Characteristics

TC	X7R (R7)																					
Part Number	GCM15				GCM18				GCM21				GCM31				GCM32					
L x W [EIA]	1.00x0.50 [0402]				1.60x0.80 [0603]				2.00x1.25 [0805]				3.20x1.60 [1206]				3.20x2.50 [1210]					
Rated Volt.	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)																						
220pF (221)	0.50 (5)	0.50 (5)																				

Continued on the following page. ↗



△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

1

TC	X7R (R7)																					
Part Number	GCM15				GCM18				GCM21					GCM31				GCM32				
L x W [EIA]	1.00x0.50 [0402]				1.60x0.80 [0603]				2.00x1.25 [0805]					3.20x1.60 [1206]				3.20x2.50 [1210]				
Rated Volt.	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)																						
330pF (331)	0.50 (5)	0.50 (5)																				
470pF (471)	0.50 (5)	0.50 (5)																				
680pF (681)	0.50 (5)	0.50 (5)																				
1000pF (102)	0.50 (5)	0.50 (5)			0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
1500pF (152)	0.50 (5)	0.50 (5)			0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
2200pF (222)	0.50 (5)	0.50 (5)			0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
3300pF (332)	0.50 (5)	0.50 (5)			0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
4700pF (472)	0.50 (5)	0.50 (5)			0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
6800pF (682)		0.50 (5)	0.50 (5)		0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
10000pF (103)		0.50 (5)	0.50 (5)		0.80 (8)	0.80 (8)			0.60 (6)	0.60 (6)												
15000pF (153)		0.50 (5)	0.50 (5)		0.80 (8)	0.80 (8)	0.80 (8)		0.60 (6)	0.60 (6)												
22000pF (223)		0.50 (5)	0.50 (5)		0.80 (8)	0.80 (8)	0.80 (8)		0.60 (6)	0.60 (6)												
33000pF (333)			0.50 (5)	0.50 (5)	0.80 (8)	0.80 (8)			0.85 (9)	0.85 (9)												
47000pF (473)			0.50 (5)	0.50 (5)	0.80 (8)	0.80 (8)			1.25 (B)	1.25 (B)												
68000pF (683)				0.50 (5)	0.80 (8)		0.80 (8)		1.25 (B)	1.25 (B)												
0.10μF (104)				0.50 (5)	0.80 (8)		0.80 (8)		1.25 (B)	1.25 (B)				0.85 (9)	1.15 (M)							
0.15μF (154)							0.80 (8)		1.25 (B)	1.25 (B)				1.15 (M)	1.15 (M)							
0.22μF (224)							0.80 (8)		1.25 (B)	1.25 (B)				1.15 (M)	1.15 (M)	0.85 (9)						
0.33μF (334)								0.80 (8)	0.85 (9)	1.25 (B)	1.25 (B)				1.15 (M)	0.85 (9)						
0.47μF (474)							0.80 (8)	0.80 (8)	1.25 (B)	1.25 (B)	1.25 (B)				1.15 (M)	1.15 (M)						
0.68μF (684)											1.25 (B)											
1.0μF (105)											1.25 (B)					1.15 (M)			2.50 (E)			
1.5μF (155)												1.25 (B)			1.60 (C)	1.15 (M)						
2.2μF (225)													1.25 (B)	1.25 (B)	1.25 (B)	1.60 (C)	1.15 (M)			2.50 (E)		
3.3μF (335)																	1.15 (M)					
4.7μF (475)																	1.60 (C)	1.60 (C)				

Continued on the following page. ↗

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

TC	X7R (R7)																							
Part Number	GCM15				GCM18				GCM21				GCM31				GCM32							
L x W [EIA]	1.00x0.50 [0402]				1.60x0.80 [0603]				2.00x1.25 [0805]				3.20x1.60 [1206]				3.20x2.50 [1210]							
Rated Volt.	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	100 (2A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)	50 (1H)	25 (1E)	16 (1C)	10 (1A)		
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)																								
6.8μF (685)																					1.60 (C)			
10μF (106)																						1.60 (C)		2.00 (D)
22μF (226)																								2.50 (E)

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.
 The tolerance will be changed to L: 3.2±0.2, W: 1.6±0.2, T: 1.15±0.15 for GCM31 25V 2.2μF type.

High Dielectric Constant Type, X7S (C7) Characteristics

TC	X7S (C7)					
Part Number	GCM18			GCM21		
L x W [EIA]	1.60x0.80 [0603]			2.00x1.25 [0805]		
Rated Volt.	16 (1C)		10 (1A)		10 (1A)	
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)						
0.68μF(684)	0.80(8)					
1.0μF(105)	0.80(8)		0.80(8)			
4.7μF(475)					1.25(B)	

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

High Dielectric Constant Type, X8L (L8) Characteristics

TC	X8L (L8)					
Part Number	GCM18		GCM21		GCM31	
L x W [EIA]	1.60x0.80 [0603]		2.00x1.25 [0805]		3.20x1.60 [1206]	
Rated Volt.	50 (1H)	16 (1C)	50 (1H)	16 (1C)	50 (1H)	16 (1C)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)						
15000pF(153)	0.80(8)					
22000pF(223)	0.80(8)					
33000pF(333)	0.80(8)					
47000pF(473)	0.80(8)					
68000pF(683)	0.80(8)		1.25(B)			
0.10μF(104)	0.80(8)		1.25(B)		1.15(M)	
0.15μF(154)	0.80(8)		1.25(B)		1.15(M)	
0.22μF(224)	0.80(8)		1.25(B)		1.15(M)	
0.33μF(334)			1.25(B)		1.15(M)	
0.47μF(474)			1.25(B)		1.15(M)	
0.68μF(684)			1.25(B)		1.60(C)	
1.0μF(105)			1.25(B)		1.60(C)	
1.5μF(155)					1.15(M)	
2.2μF(225)					1.15(M)	

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

1

High Dielectric Constant Type, X8R (R9) Characteristics

TC	X8R (R9)		
Part Number	GCM18	GCM21	GCM31
L x W [EIA]	1.60x0.80 [0603]	2.00x1.25 [0805]	3.20x1.60 [1206]
Rated Volt.	50 (1H)	50 (1H)	50 (1H)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)			
33000pF(333)	0.80(8)		
47000pF(473)	0.80(8)		
68000pF(683)		1.25(B)	
0.10μF(104)		1.25(B)	
0.15μF(154)			1.15(M)
0.22μF(224)			1.15(M)
0.33μF(334)			1.15(M)

The part numbering code is shown in ().
 Dimensions are shown in mm and Rated Voltage in Vdc.

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Specifications and Test Methods

1

No.	AEC-Q200 Test Item	Specifications		AEC-Q200 Test Method															
		Temperature Compensating Type	High Dielectric Type																
1	Pre-and Post-Stress Electrical Test	-																	
2	High Temperature Exposure (Storage)	The measured and observed characteristics should satisfy the specifications in the following table.		Sit the capacitor for 1000±12 hours at 150±3°C. Let sit for 24±2 hours at room temperature, then measure.															
	Appearance	No marking defects																	
	Capacitance Change	Within ±2.5% or ±0.25pF (Whichever is larger)	Within ±10.0%																
	Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.03 max. W.V. : 16V : 0.05 max.																
3	Temperature Cycle	The measured and observed characteristics should satisfy the specifications in the following table.		Fix the capacitor to the supporting jig in the same manner and under the same conditions as (18). Perform the 1000 cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure <table border="1" style="margin: 10px auto;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>-55+0/-3</td> <td>Room Temp.</td> <td>125+3/-0 (ΔC/R7/C7) 150+3/-0 (L8/R9/5G)</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>15±3</td> <td>1</td> <td>15±3</td> <td>1</td> </tr> </tbody> </table> <ul style="list-style-type: none"> • Initial measurement for high dielectric constant type Perform a heat treatment at 150±9°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. 	Step	1	2	3	4	Temp. (°C)	-55+0/-3	Room Temp.	125+3/-0 (ΔC/R7/C7) 150+3/-0 (L8/R9/5G)	Room Temp.	Time (min.)	15±3	1	15±3	1
	Step	1	2		3	4													
	Temp. (°C)	-55+0/-3	Room Temp.		125+3/-0 (ΔC/R7/C7) 150+3/-0 (L8/R9/5G)	Room Temp.													
	Time (min.)	15±3	1		15±3	1													
Appearance	No marking defects																		
Capacitance Change	Within ±2.5% or ±0.25pF (Whichever is larger)	Within ±10.0%																	
Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.03 max. W.V. : 16V : 0.05 max.																	
I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller)		*1																
4	Destructive Physical Analysis	No defects or abnormalities		Per EIA-469															
5	Moisture Resistance	The measured and observed characteristics should satisfy the specifications in the following table.		Apply the 24-hour heat (25 to 65°C) and humidity (80 to 98%) treatment shown below, 10 consecutive times. Let sit for 24±2 hours at room temperature, then measure. <div style="text-align: center;"> <p>Temperature (°C) vs. Hours</p> <p>One cycle 24 hours</p> </div>															
	Appearance	No marking defects																	
	Capacitance Change	Within ±3.0% or ±0.30pF (Whichever is larger)	Within ±12.5%																
	Q/D.F.	30pFmin. : Q≥350 10pF and over, 30pF and below: Q≥275+ $\frac{5}{2}$ C 10pFmax. : Q≥200+10C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.03 max. W.V. : 16V : 0.05 max.																
I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller)		*1																
6	Biased Humidity	The measured and observed characteristics should satisfy the specifications in the following table.		Apply the rated voltage and 1.3+0.2/-0Vdc (add 6.8k Ω resistor) at 85±3°C and 80 to 85% humidity for 1000±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.															
	Appearance	No marking defects																	
	Capacitance Change	Within ±3.0% or ±0.30pF (Whichever is larger)	Within ±12.5%																
	Q/D.F.	30pF and over : Q≥200 30pF and below : Q≥100+ $\frac{1}{2}$ C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.035 max. W.V. : 16V : 0.05 max.																
I.R.	More than 1,000Ω or 50Ω · F (Whichever is smaller)		*1																

Continued on the following page.

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

1

Specifications and Test Methods

Continued from the preceding page.

No.	AEC-Q200 Test Item	Specifications		AEC-Q200 Test Method	
		Temperature Compensating Type	High Dielectric Type		
7	Operational Life	The measured and observed characteristics should satisfy the specifications in the following table.		Apply 200% of the rated voltage for 1000±12 hours at 125±3°C. Let sit for 24±2 hours at room temperature, then measure. *2 The charge/discharge current is less than 50mA. • Initial measurement for high dielectric constant type. Apply 200% of the rated DC voltage for one hour at the maximum operating temperature ±3°C. Remove and let sit for 24±2 hours at room temperature. Perform initial measurement. *2	
	Appearance	No marking defects			
	Capacitance Change	Within ±3.0% or ±0.30pF (Whichever is larger)	Within ±12.5%		
	Q/D.F.	30pFmin. : Q≥350 10pF and over, 30pF and below: $Q \geq 275 + \frac{C}{10}$ 10pFmax. : Q≥200+10C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.035 max. W.V. : 16V : 0.05 max.		
I.R.	More than 1,000MΩ or 50Ω · F (Whichever is smaller) *1				
8	External Visual	No defects or abnormalities		Visual inspection	
9	Physical Dimension	Within the specified dimensions		Using calipers	
10	Resistance to Solvents	Appearance	No marking defects		Per MIL-STD-202 Method 215 Solvent 1 : 1 part (by volume) of isopropyl alcohol 3 parts (by volume) of mineral spirits Solvent 2 : Terpene defluxer Solvent 3 : 42 parts (by volume) of water 1 part (by volume) of propylene glycol monomethylether 1 part (by volume) of monoethanolamine
		Capacitance Change	Within the specified tolerance		
		Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.	
		I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1		
11	Mechanical Shock	Appearance	No marking defects		Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks). The specified test pulse should be Half-sine and should have a duration : 0.5ms, peak value: 1500g and velocity change: 4.7m/s.
		Capacitance Change	Within the specified tolerance		
		Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.	
		I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1		
12	Vibration	Appearance	No defects or abnormalities		Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (19). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 2000Hz. The frequency range, from 10 to 2000Hz and return to 10Hz, should be traversed in approximately 20 minutes. This motion should be applied for 12 items in each 3 mutually perpendicular directions (total of 36 times).
		Capacitance Change	Within the specified tolerance		
		Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.	
		I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1		
13	Resistance to Soldering Heat	The measured and observed characteristics should satisfy the specifications in the following table.		Immerse the capacitor in a eutectic solder solution at 260±5°C for 10±1 seconds. Let sit at room temperature for 24±2 hours, then measure. • Initial measurement for high dielectric constant type Perform a heat treatment at 150±5°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.	
	Appearance	No marking defects			
	Capacitance Change	Within the specified tolerance			
	Q/D.F.	30pFmin. : Q≥1000 30pFmax. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.		
I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1				

Continued on the following page. ↗

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Specifications and Test Methods

Continued from the preceding page.

No.	AEC-Q200 Test Item	Specifications		AEC-Q200 Test Method																									
		Temperature Compensating Type	High Dielectric Type																										
14	Thermal Shock	The measured and observed characteristics should satisfy the specifications in the following table.		Fix the capacitor to the supporting jig in the same manner and under the same conditions as (18). Perform the 300 cycles according to the two heat treatments listed in the following table (Maximum transfer time is 20 seconds). Let sit for 24±2 hours at room temperature, then measure. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>-55+0/-3</td> <td>125+3/-0 (5C, C7, R7) 150+3/-0 (L8, R9, 5G)</td> </tr> <tr> <td>Time (min.)</td> <td>15±3</td> <td>15±3</td> </tr> </tbody> </table> • Initial measurement for high dielectric constant type Perform a heat treatment at 150±5°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.	Step	1	2	Temp. (°C)	-55+0/-3	125+3/-0 (5C, C7, R7) 150+3/-0 (L8, R9, 5G)	Time (min.)	15±3	15±3																
		Step	1		2																								
		Temp. (°C)	-55+0/-3		125+3/-0 (5C, C7, R7) 150+3/-0 (L8, R9, 5G)																								
		Time (min.)	15±3		15±3																								
Appearance	No marking defects																												
Capacitance Change	Within ±2.5% or ±0.25pF (Whichever is larger)	Within ±10.0%																											
	Q/D.F.	30pF min. : Q≥1000 30pF max. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. *1 W.V. : 16V : 0.035 max.																										
	I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1																											
15	ESD	Appearance	No marking defects																										
		Capacitance Change	Within the specified tolerance																										
		Q/D.F.	30pF min. : Q≥1000 30pF max. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25Vmin. : 0.025 max. *1 W.V. : 16V : 0.035 max.																									
		I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller) *1																										
16	Solderability	95% of the terminations is to be soldered evenly and continuously.		(a) Preheat at 155°C for 4 hours. After preheating, immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5°C.																									
				(b) Should be placed into steam aging for 8 hours±15 minutes. After preheating, immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in eutectic solder solution for 5+0/-0.5 seconds at 235±5°C.																									
				(c) Should be placed into steam aging for 8 hours±15 minutes. After preheating, immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in eutectic solder solution for 120 ±5 seconds at 260±5°C.																									
17	Electrical Characterization	Appearance	No defects or abnormalities		Visual inspection.																								
		Capacitance Change	Within the specified tolerance		The capacitance/Q/D.F. should be measured at 25°C at the frequency and voltage shown in the table. <table border="1" style="margin-top: 5px;"> <thead> <tr> <th colspan="3">(1) Temperature Compensating Type</th> </tr> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C≤1000pF</td> <td>1±0.1MHz</td> <td>0.5 to 5Vrms</td> </tr> <tr> <td>C>1000pF</td> <td>1±0.1kHz</td> <td>1±0.2Vrms</td> </tr> </tbody> </table> <table border="1" style="margin-top: 5px;"> <thead> <tr> <th colspan="3">(2) High Dielectric Type</th> </tr> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C≤10μF</td> <td>1±0.1kHz</td> <td>1±0.2Vrms</td> </tr> <tr> <td>C>10μF</td> <td>120±24Hz</td> <td>0.5±0.1Vrms</td> </tr> </tbody> </table>	(1) Temperature Compensating Type			Capacitance	Frequency	Voltage	C≤1000pF	1±0.1MHz	0.5 to 5Vrms	C>1000pF	1±0.1kHz	1±0.2Vrms	(2) High Dielectric Type			Capacitance	Frequency	Voltage	C≤10μF	1±0.1kHz	1±0.2Vrms	C>10μF	120±24Hz	0.5±0.1Vrms
		(1) Temperature Compensating Type																											
		Capacitance	Frequency	Voltage																									
		C≤1000pF	1±0.1MHz	0.5 to 5Vrms																									
C>1000pF	1±0.1kHz	1±0.2Vrms																											
(2) High Dielectric Type																													
Capacitance	Frequency	Voltage																											
C≤10μF	1±0.1kHz	1±0.2Vrms																											
C>10μF	120±24Hz	0.5±0.1Vrms																											
Q/D.F.	30pF min. : Q≥1000 30pF max. : Q≥400+20C C : Nominal Capacitance (pF)	W.V. : 25V min. : 0.025 max. *1 W.V. : 16V : 0.035 max																											
I.R.	25°C More than 100,000MΩ or 1,000Ω · F (Whichever is smaller)	25°C More than 10,000MΩ or 500Ω · F (Whichever is smaller)	The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 125°C and within 2 minutes of charging.																										
	Max. Operating Temperature...125°C More than 10,000MΩ or 100Ω · F (Whichever is smaller)	Max. Operating Temperature...125°C More than 1,000MΩ or 10Ω · F (Whichever is smaller)																											
	Max. Operating Temperature...150°C More than 10,000MΩ or 100Ω · F (Whichever is smaller)	Max. Operating Temperature...150°C More than 1,000MΩ or 1Ω · F (Whichever is smaller)																											
	Dielectric Strength	No failure		No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA.																									


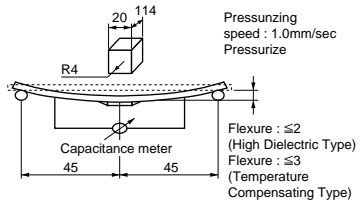
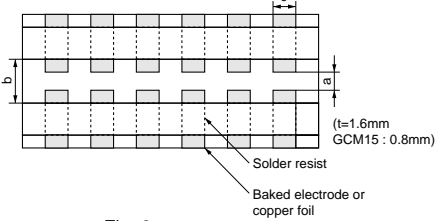
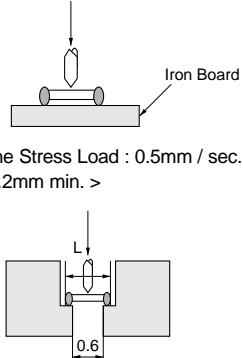
Continued on the following page.

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

1

Specifications and Test Methods

Continued from the preceding page.

No.	AEC-Q200 Test Item	Specifications		AEC-Q200 Test Method																									
		Temperature Compensating Type	High Dielectric Type																										
18	Board Flex	Appearance	No marking defects		<p>Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 1 using a eutectic solder. Then apply a force in the direction shown in Fig. 2 for 5±1sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GCM15</td> <td>0.5</td> <td>1.5</td> <td>0.6</td> </tr> <tr> <td>GCM18</td> <td>0.6</td> <td>2.2</td> <td>0.9</td> </tr> <tr> <td>GCM21</td> <td>0.8</td> <td>3.0</td> <td>1.3</td> </tr> <tr> <td>GCM31</td> <td>2.0</td> <td>4.4</td> <td>1.7</td> </tr> <tr> <td>GCM32</td> <td>2.0</td> <td>4.4</td> <td>2.6</td> </tr> </tbody> </table> <p>(in mm)</p>  <p>Fig. 1</p>  <p>Fig. 2</p>	Type	a	b	c	GCM15	0.5	1.5	0.6	GCM18	0.6	2.2	0.9	GCM21	0.8	3.0	1.3	GCM31	2.0	4.4	1.7	GCM32	2.0	4.4	2.6
		Type	a	b		c																							
		GCM15	0.5	1.5		0.6																							
		GCM18	0.6	2.2		0.9																							
GCM21	0.8	3.0	1.3																										
GCM31	2.0	4.4	1.7																										
GCM32	2.0	4.4	2.6																										
Capacitance Change	Within ±5.0% or ±0.5pF (Whichever is larger)	Within ±10.0%																											
Q/D.F.	30pF min. : Q≥1000 30pF max. : Q≥400+20C C : Nominal Capacitance (pF)	*1 W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.																											
I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller)	*1																											
19	Terminal Strength	Appearance	No marking defects		<p>Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 3 using a eutectic solder. Then apply *18N force in parallel with the test jig for 60sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. *2N (GCM15)</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GCM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>GCM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GCM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>GCM31</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>GCM32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> </tbody> </table> <p>(in mm)</p>  <p>Fig. 3</p>	Type	a	b	c	GCM15	0.4	1.5	0.5	GCM18	1.0	3.0	1.2	GCM21	1.2	4.0	1.65	GCM31	2.2	5.0	2.0	GCM32	2.2	5.0	2.9
		Type	a	b		c																							
		GCM15	0.4	1.5		0.5																							
		GCM18	1.0	3.0		1.2																							
GCM21	1.2	4.0	1.65																										
GCM31	2.2	5.0	2.0																										
GCM32	2.2	5.0	2.9																										
Capacitance Change	Within the specified tolerance																												
Q/D.F.	30pF min. : Q≥1000 30pF max. : Q≥400+20C C : Nominal Capacitance (pF)	*1 W.V. : 25Vmin. : 0.025 max. W.V. : 16V : 0.035 max.																											
I.R.	More than 10,000MΩ or 500Ω · F (Whichever is smaller)	*1																											
20	Beam Load Test	The chip endure following force.		<p>Place the capacitor in the beam load fixture as Fig. 4. Apply a force.</p> <p>< Chip Length : 2.5mm max. ></p>  <p>Fig. 4</p> <p>Speed supplied the Stress Load : 0.5mm / sec. < Chip Length : 3.2mm min. ></p> <p>Speed supplied the Stress Load : 2.5mm / sec.</p>																									
		< Chip L dimension : 2.5mm max. > Chip thickness > 0.5mm rank : 20N Chip thickness ≤ 0.5mm rank : 8N < Chip L dimension : 3.2mm min. > Chip thickness < 1.25mm rank : 15N Chip thickness ≥ 1.25mm rank : 54.5N																											

Continued on the following page. ↗

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Specifications and Test Methods

Continued from the preceding page.

No.	AEC-Q200 Test Item		Specifications		AEC-Q200 Test Method												
			Temperature Compensating Type	High Dielectric Type													
21	Capacitance Temperature Characteristics	Capacitance Change	Within the specified tolerance (Table A)	C7 : Withn ±22% (-55°C to +125°C) L8 : Withn +15/-40% (-55°C to +150°C) R7 : Withn ±15% (-55°C to +125°C) R9 : Withn ±15% (-55°C to +150°C)	<p>The capacitance change should be measured after 5 min. at each specified temperature stage.</p> <p>(1) Temperature Compensating Type The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step1 through 5 (ΔC: +25°C to +125°C : other temp. coeffs.: +25°C to +85°C) the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as shown in Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in steps 1, 3 and 5 by the capacitance value in step 3.</p> <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">-55±3</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">125±3 (ΔC / R7 / C7), 150±3 (L8 / R9 / 5G)</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">25±2</td> </tr> </tbody> </table> <p>(2) High Dielectric Constant Type The ranges of capacitance change compared with the above 25°C value over the temperature ranges shown in the table should be within the specified ranges. - Initial measurement for high dielectric constant type. Perform a heat treatment at 150+0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement.</p>	Step	Temperature (°C)	1	25±2	2	-55±3	3	25±2	4	125±3 (ΔC / R7 / C7), 150±3 (L8 / R9 / 5G)	5	25±2
		Step	Temperature (°C)														
		1	25±2														
2	-55±3																
3	25±2																
4	125±3 (ΔC / R7 / C7), 150±3 (L8 / R9 / 5G)																
5	25±2																
Temperature Coefficient	Within the specified tolerance (Table A)																
Capacitance Drift	Within ±0.2% or ±0.05 pF (Whichever is larger) * Do not apply to 1X/25V																

*1: The figure indicates typical inspection. Please refer to individual specifications.

*2: Some of the parts are applicable in rated voltage x 150%. Please refer to individual specifications.

Table A

Char.	Nominal Values (ppm/°C) Note1	Capacitance Change from 25°C (%)					
		-55		-30		-10	
		Max.	Min.	Max.	Min.	Max.	Min.
5C/5G	0±30	0.58	-0.24	0.40	-0.17	0.25	-0.11

Note 1 : Nominal values denote the temperature coefficient within a range of 25°C to 125°C (for 5C)/150°C (for 5G).