

LQH44PN6R8MP0#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH44PN6R8MP0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH44PN6R8MP0%23

"#" indicates a package specification code.

Size Code 4040 (1515) in mm (in inch), 1.8mm max. Thickness

















< List of part numbers with package codes > LQH44PN6R8MP0K LQH44PN6R8MP0L



Appearance & Shape







(in mm)

References

Packaging	Specifications	Standard Packing Quantity
K	330Embossed Tape	3500
L	180Embossed Tape	1000

Mass (typ.)		
1 piece	0.1g	



Notices

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQH44PN6R8MP0#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH44PN6R8MP0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH44PN6R8MP0%23

"#" indicates a package specification code.



Specifications

L size	4.0±0.2mm
W size	4.0±0.2mm
T size	1.65±0.15mm
Size code inch (mm)	1515 (4040)
Inductance	6.8µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	1400mA
Rated current (Itemp) (Based on Temperature rise)	1340mA
Max. of DC resistance	0.144Ω
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C
Class of magnetic shield	Magnetic Resin
Self resonance frequency (min.)	35MHz
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Brand	Murata
DC Resistance Intermediate Values	0.12Ω±20%
Series	LQH44PN_P0

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



LQH44PN6R8MP0#

Note: This datasheet may be out of date.


Please download the latest datasheet of LQH44PN6R8MP0# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-gb/products/productdetail?partno=LQH44PN6R8MP0%23

"#" indicates a package specification code.



Characteristic Data

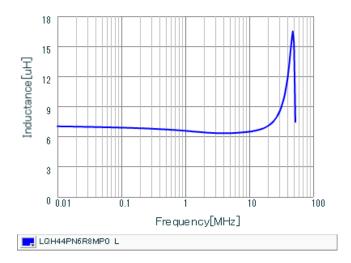

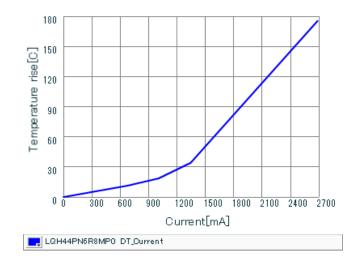

Inductance - Frequency Characteristics

Temperature Increase Characteristic

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

