

# C3216X7T2J153M085AC

TDK Item Description : C3216X7T2J153MT\*\*\*\*



## Application & Main Feature


Commercial Grade ( Mid Voltage (100 to 630V) )

## Series


C3216 [EIA CC1206]



## DC Bias Characteristic

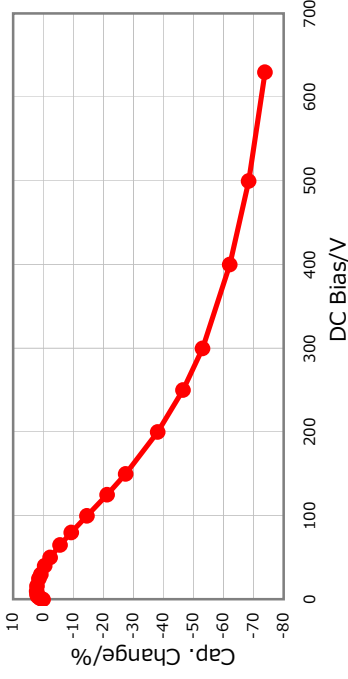

## |Z|, ESR vs. Freq. Characteristics

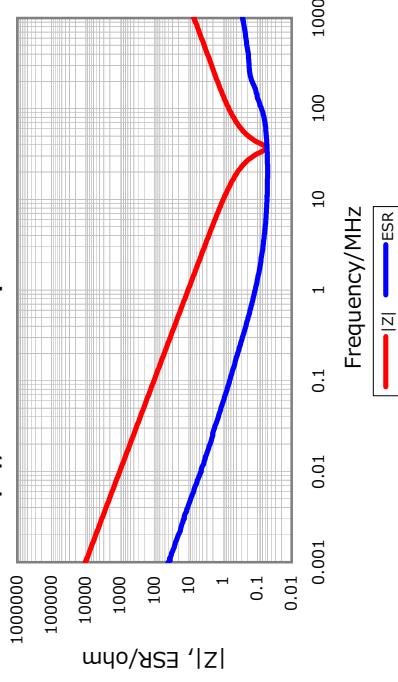

## Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

## Rated Voltage

2J (630Vdc)

## Capacitance

15nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


## Temperature Characteristics

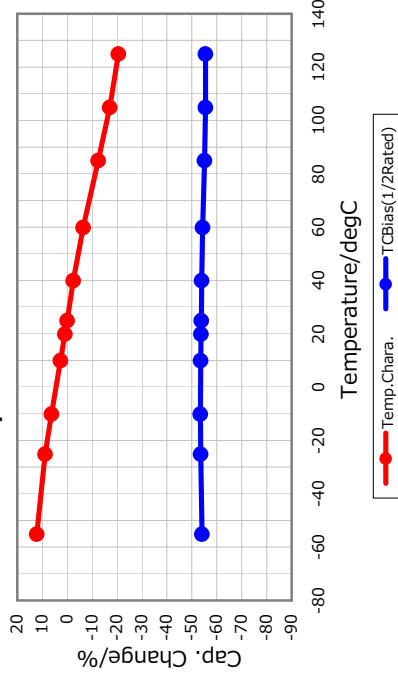

## Ripple Temperature Rise Characteristics

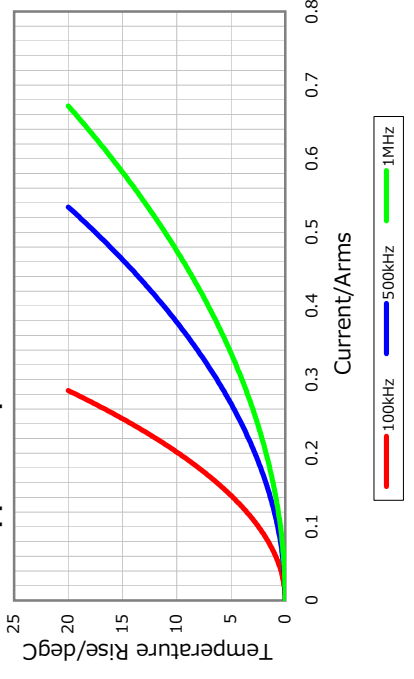

## Cap. vs. Freq. Characteristic

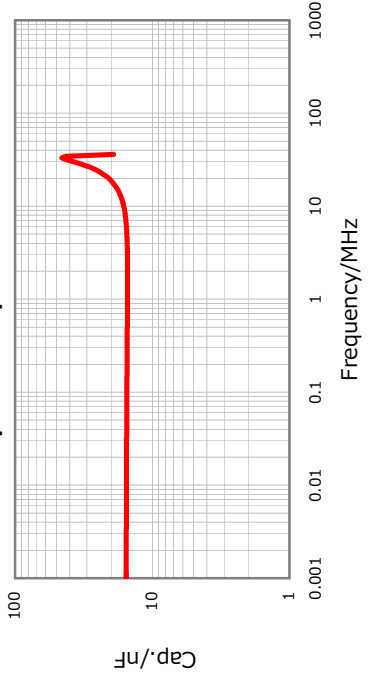

All specifications are subject to change without notice.

January 4, 2016