

LQH44PN4R7MJ0#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH44PN4R7MJ0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQH44PN4R7MJ0%23

"#" indicates a package specification code.

Size Code 4040 (1515) in mm (in inch), 1.2mm max. Thickness
















< List of part numbers with package codes > LQH44PN4R7MJ0K LQH44PN4R7MJ0L



Appearance & Shape





(in mm)

References

Packaging	Specifications	Standard
		Packing
		Quantity
K	330Embossed Tape	4500
L	180Embossed Tape	1000

Mass (typ.)		
1 piece	0.07g	



Notices

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQH44PN4R7MJ0#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH44PN4R7MJ0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQH44PN4R7MJ0%23

"#" indicates a package specification code.



Specifications

L size	4.0±0.2mm
W size	4.0±0.2mm
T size	1.1±0.1mm
Size code inch (mm)	1515 (4040)
Inductance	4.7µH±20%
Inductance Test Frequency	100kHz
Rated current (Isat) (Based on Inductance change)	840mA
Rated current (Itemp) (Based on Temperature rise)	980mA
Max. of DC resistance	0.14Ω
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C
Class of magnetic shield	Magnetic Resin
Self resonance frequency (min.)	50MHz
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Brand	Murata
DC Resistance Intermediate Values	0.117Ω±20%
Series	LQH44PN_J0

2 of 3

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



LQH44PN4R7MJ0#

Note: This datasheet may be out of date.


Please download the latest datasheet of LQH44PN4R7MJ0# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-us/products/productdetail?partno=LQH44PN4R7MJ0%23

"#" indicates a package specification code.



Characteristic Data

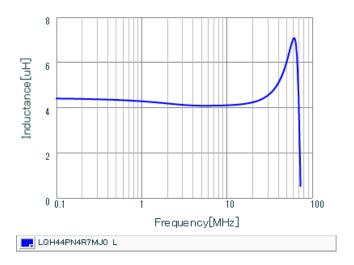

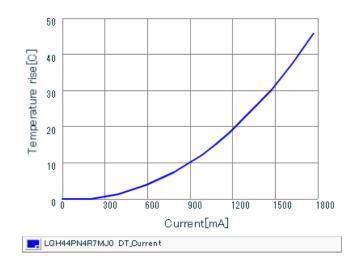

Inductance - Frequency Characteristics

Temperature Increase Characteristic

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

