

TDK item description CGA8M2C0G1H104JT****


Applications Automotive Grade

Feature AEC-Q200

General (Up to 50V)

Series CGA8(4532) [EIA 1812]

Status Production



Size

| | |
|-------------------------------|------------------|
| Length(L) | 4.50mm ±0.40mm |
| Width(W) | 3.20mm ±0.40mm |
| Thickness(T) | 2.00mm ±0.20mm |
| Terminal Width(B) | 0.20mm Min. |
| Terminal Spacing(G) | |
| Recommended Land Pattern (PA) | 3.10mm to 3.70mm |
| Recommended Land Pattern (PB) | 1.20mm to 1.40mm |
| Recommended Land Pattern (PC) | 2.40mm to 3.20mm |

Electrical Characteristics

| | |
|------------------------------|-----------------|
| Capacitance | 100nF ±5% |
| Rated Voltage | 50VDC |
| Temperature Characteristic | C0G(0±30ppm/°C) |
| Q (Min.) | 1000 |
| Insulation Resistance (Min.) | 5000MΩ |

Other






| | |
|------------------|---------------------------------------|
| Soldering Method | Reflow |
| AEC-Q200 | YES |
| Packing | Embossed (Plastic)Taping [180mm Reel] |
| Package Quantity | 1000pcs |

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

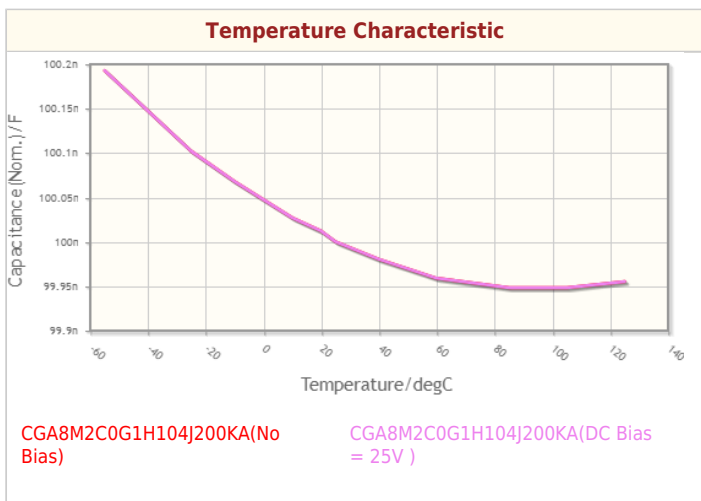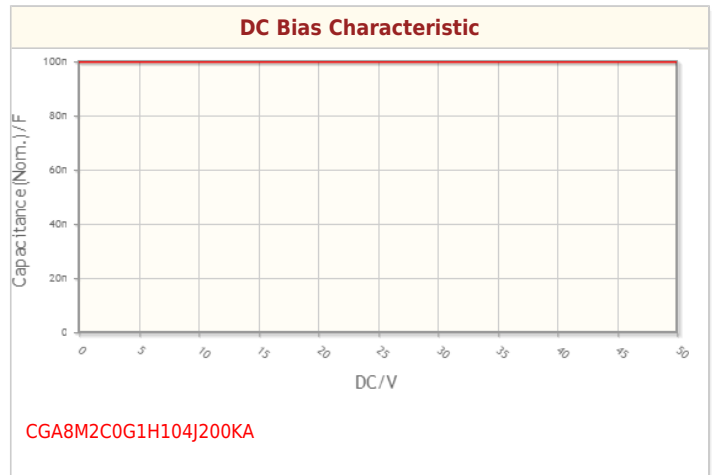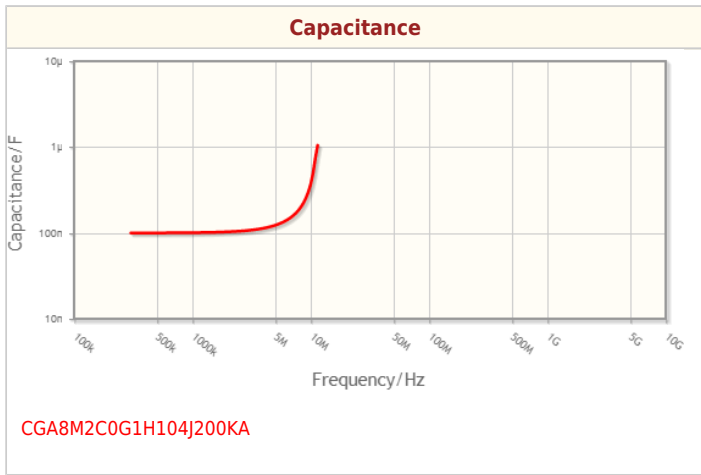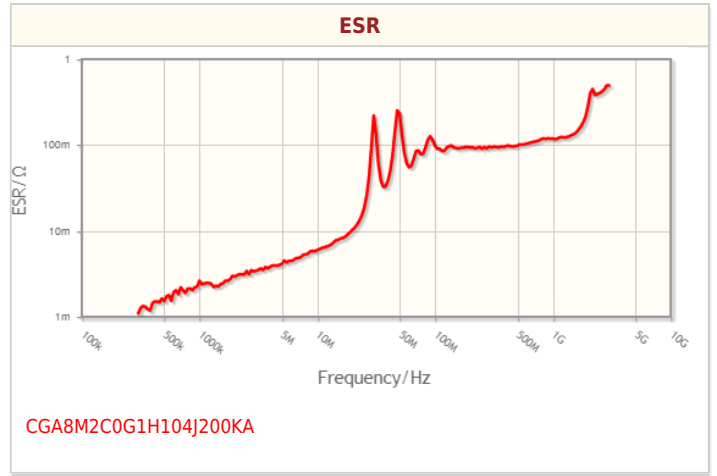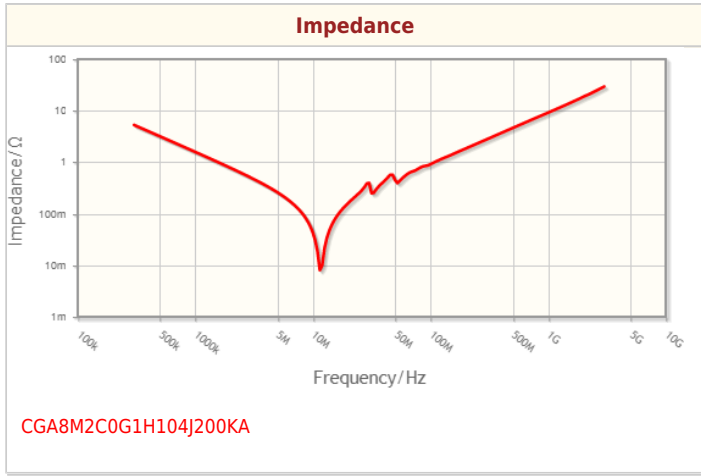

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

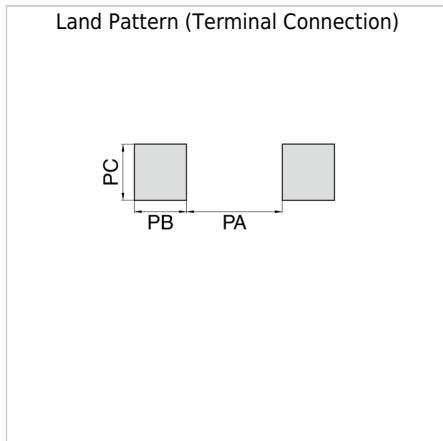

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

Downloaded from [Arrow.com](https://arrow.com)