

C2012X7R2A473M125AA

TDK Item Description : C2012X7R2A473MT****



Application & Main Feature


Commercial Grade (Mid Voltage (100 to 630V))

Series


C2012 [EIA CC0805]



DC Bias Characteristic

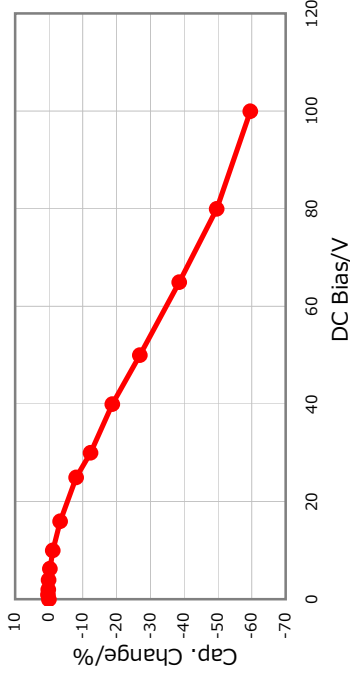

|Z|, ESR vs. Freq. Characteristics

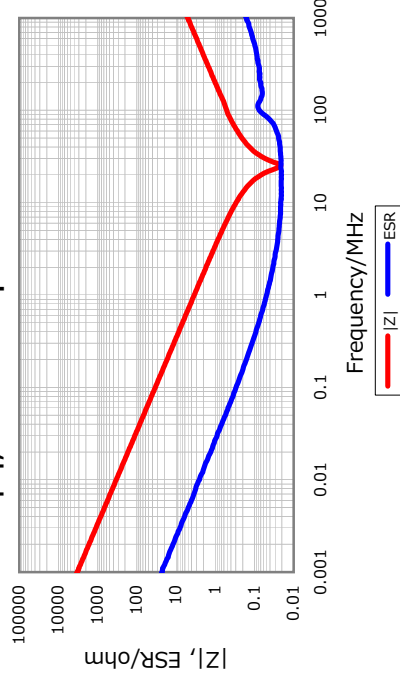

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

2A (100Vdc)

Capacitance

47nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

3% Max.


Insulation Resistance

10Gohm Min.


AEC-Q200

Not Applicable


Temperature Characteristics

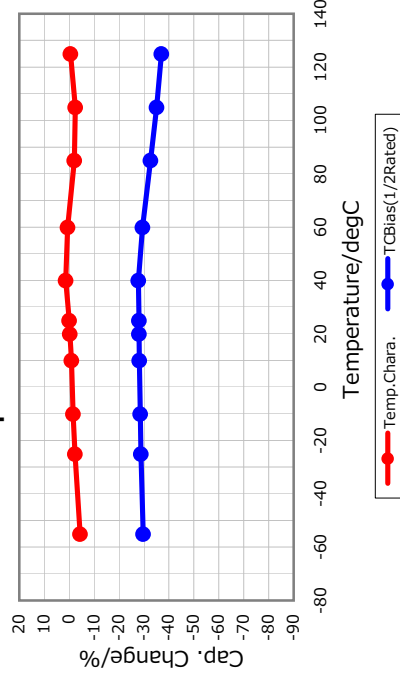

Ripple Temperature Rise Characteristics

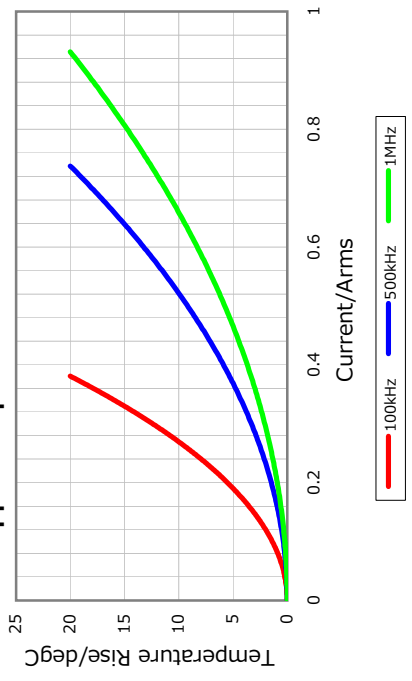

Cap. vs. Freq. Characteristic

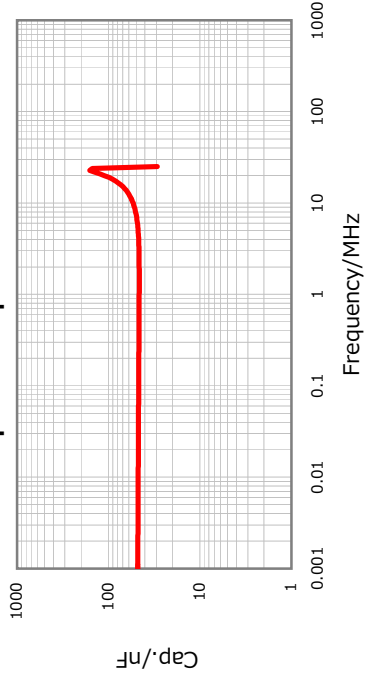

All specifications are subject to change without notice.

January 3, 2016