


TDK item description CKG45KX7T2E105MT****

Applications	Commercial Grade Please refer to Part No. CKG45KX7T2E105M290JJ for Automotive use.	
Feature	Mid Mid Voltage (100 to 630V) Mega MEGACAP Type	
Series	CKG45K(4532) [EIA 1812]	
Status	Production (Not Recommended for New Design)	



	Size
Length(L)	5.00mm ±0.50mm
Width(W)	3.50mm ±0.50mm
Thickness(T)	2.90mm ±0.10mm
Metal-Frame Width(E)	1.10mm ±0.30mm
Recommended Land Pattern (PA)	3.30mm to 3.70mm
Recommended Land Pattern (PB)	1.20mm to 1.50mm
Recommended Land Pattern (PC)	2.70mm to 3.20mm

Electrical Characteristics		
Capacitance	1μF ±20%	
Rated Voltage	250VDC	
Temperature Characteristic	X7T(+22,-33%)	
Dissipation Factor (Max.)	2.5%	
Insulation Resistance (Min.)	500ΜΩ	


Other		
Soldering Method	Reflow	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [330mm Reel]	
Package Quantity	1000pcs	


 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


 $^{! \ \}mbox{All specifications}$ are subject to change without notice.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

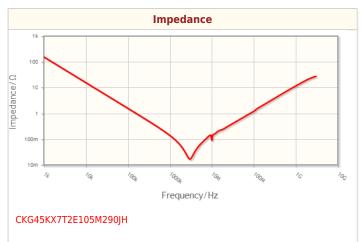


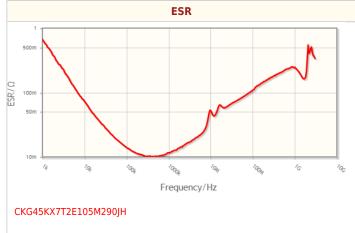

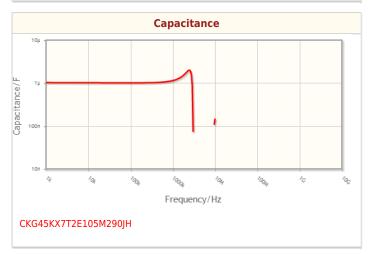

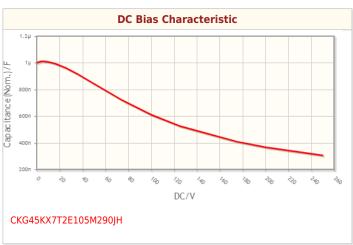

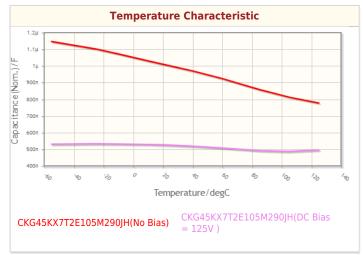

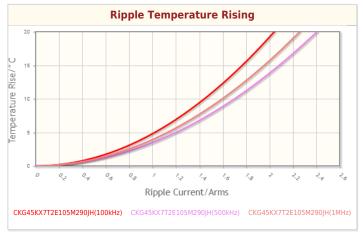


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



Associated Images

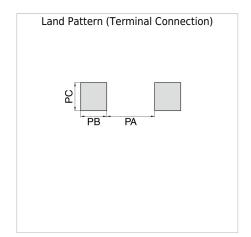

 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.