



Search by  
Part No.



Search by  
Characteristic



Cross  
Reference




ProductCatalog

FK26C0G2J101JN006 MLCC with Dipped Radial Lead

Applications Commercial Grade

Feature Mid Mid Voltage (100 to 630V)

Series FK Series

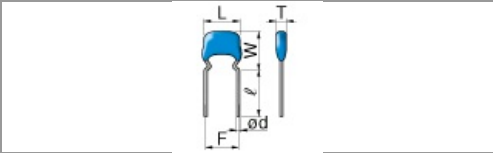

Size	
Length(L)	5.50mm Max.
Width(W)	6.00mm Max.
Thickness(T)	3.50mm Max.
Lead Space(F)	5.00mm +0.80/-0.20mm
Lead Diameter(d)	0.50mm +0.10/-0.03mm

Electrical Characteristics	
Capacitance	100pF +/-5%
Rated Voltage	630Vdc
Withstanding Voltage	945Vdc
Temperature Characteristic	C0G(0+/-30ppm/degC)
Q	1000 Min.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Flow, Iron Soldering
Lead Length / Package Type	Taping
Package Quantity	2000Pcs Min.

PDF file of this page

Request Now

Contact

Documents

Catalog(Mid Voltage (100 to 630V))

Specification

Design Tools

» Search by Part Number » Search by Characteristic » Cross Reference » Product Catalog

» Product Portal » Help » Contact

Terms of Use

Copyright(c) 2013 TDK Corporation. All rights reserved.