

Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN221MG0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH3NPN221MG0%23

### "#" indicates a package specification code.

LQH3NPN221MG0#


Size Code 3030 (1212) in mm (in inch), 1.0mm max. Thickness



< List of part numbers with package codes > LQH3NPN221MG0K LQH3NPN221MG0L

## Appearance & Shape







Packaging	Specifications	Standard Packing Quantity
К	330Embossed Tape	6000
L	180Embossed Tape	1500

Mass (typ.)			
1 piece	0.034g		



When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





# LQH3NPN221MG0#

Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN221MG0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH3NPN221MG0%23

"#" indicates a package specification code.



## Specifications

L size	3.0±0.2mm
W size	3.0±0.2mm
T size	0.9±0.1mm
Size code inch (mm)	1212 (3030)
Inductance	220µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	100mA
Rated current (Itemp) (Based on Temperature rise)	130mA
Max. of DC resistance	16.8Ω
Class of magnetic shield	Magnetic Resin
Self resonance frequency (min.)	8.5MHz
Operating Temperature Range(Self-temperature rise is not included)	-40℃ to 85℃
Brand	Murata
DC Resistance Intermediate Values	14.0Ω±20%
Series	LQH3NPN_G0

2 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.






# LQH3NPN221MG0#

**Characteristic Data** 


Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN221MG0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH3NPN221MG0%23


"#" indicates a package specification code.



Inductance - Frequency Characteristics

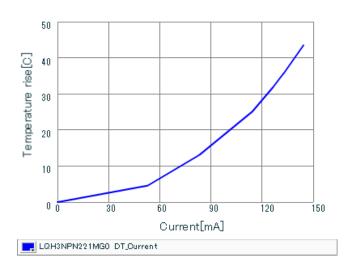

**Temperature Increase Characteristic** 



Impedance - Current Characteristics

3 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

