

LQM2HPN2R2MEH#

Note: This datasheet may be out of date

Please download the latest datasheet of LQM2HPN2R2MEH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQM2HPN2R2MEH%23

"#" indicates a package specification code.

This component has greater current saturation characteristic than existing LQM2HP series and height is 0. 8mm max.


















< List of part numbers with package codes > LQM2HPN2R2MEHB LQM2HPN2R2MEHL



Appearance & Shape

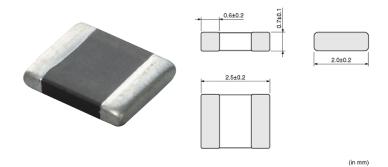



References

Packaging	Specifications	Standard
		Packing
		Quantity
В	Bulk(Bag)	1000
L	180Embossed Tape	3000

Mass (typ.)	
1 piece	0.016g



Notices

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

1 of 3

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





LQM2HPN2R2MEH#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQM2HPN2R2MEH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQM2HPN2R2MEH%23

"#" indicates a package specification code.



Specifications

L size	2.5±0.2mm
W size	2.0±0.2mm
T size	0.7±0.1mm
Size code inch (mm)	1008 (2520)
Inductance	2.2µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	0.8A(Max) / 1.0A(Typ.)
Rated current (Itemp) (Based on Temperature rise)	1.3A(Max) / 1.7A(Typ.)
Max. of DC resistance	0.188Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	30MHz
Brand	Murata
DC Resistance Intermediate Values	0.15Ω(typ.)
Operating Temperature Range	-40°C to 85°C
Series	LQM2HPN_EH

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



LQM2HPN2R2MEH#

Note: This datasheet may be out of date.


Please download the latest datasheet of LQM2HPN2R2MEH# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-us/products/productdetail?partno=LQM2HPN2R2MEH%23

"#" indicates a package specification code.




Characteristic Data

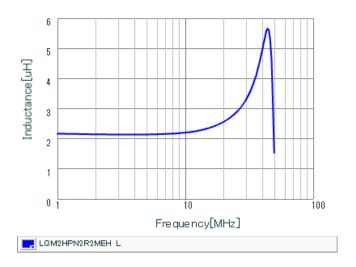

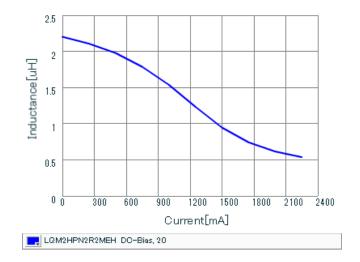

Inductance - Frequency Characteristics

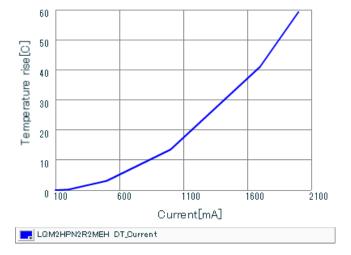

Impedance - Current Characteristics

Temperature Increase Characteristic

3 of 3

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

