

TAZ Series




CWR09 - MIL-PRF-55365/4



Fully qualified to MIL-PRF-55365/4, this series represents the most flexible of surface mount form factors, offering eight case sizes (A through H). This series is fully interchangeable with CWR06 conformal types, while offering the advantages of molded body/compliant termination construction, polarity and capacitance. The molded construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques.

The five smaller cases are characterized by their low profile construction, with the A case being the world's smallest molded military tantalum. There are three termination finishes available: fused solder plated ("K" per MIL-PRF-55365), hot solder dipped ("C") and gold plated ("B"). In addition, the molding compound has been selected to meet the requirements of UL94V-0 and outgassing requirements of NASA SP-R-0022A.

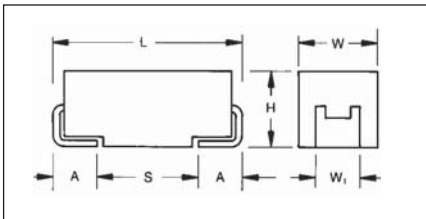

MARKING

(White marking on black body)



Polarity Stripe (+)

Capacitance Code
Rated Voltage

CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W _t)	Term. Length (A) ±0.13 (0.005)	S min
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.80 (0.071)
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68+0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	0.70 (0.028)

HOW TO ORDER

CWR09

J

^

225

@

+

□

Type

Voltage Code

C = 4Vdc
D = 6Vdc
F = 10Vdc
H = 15Vdc
J = 20Vdc
K = 25Vdc
M = 35Vdc
N = 50Vdc

Termination Finish

K = Solder Fused
C = Hot Solder Dipped
B = Gold Plated

Capacitance Code

pF code:
1st two digits represent significant figures
3rd digit represents multiplier (number of zeros to follow)

Capacitance Tolerance

M = ±20%
K = ±10%
J = ±5%

Reliability Grade

Weibull: B = 0.1%/1000 Hrs.
(90% C = 0.01%/1000 Hrs. conf.)
Comm: Z = Non ER

Surge Test Option

A = 10 cycles, +25°C
B = 10 cycles, -55°C & +85°C
C = 10 cycles, -55°C & +85°C before Weibull

Packaging

Bulk = Standard
TR = 7" T&R
TR13 = 13" T&R
W = Waffle

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.1 µF to 100 µF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage: (V _R)	≤85°C:	4	6	10	15	20	25	35	50	
Category Voltage: (V _C)	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V _S)	≤85°C:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	13	16	20	28	40	
Temperature Range:	-55°C to +125°C									



CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V_R) at 85°C							
μF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104								A
0.15	154								A
0.22	224							A	B
0.33	334						A		B
0.47	474					A		B	C
0.68	684				A	B	B	C	D
1.0	105			A		B	C	D	E
1.5	155		A		B	C	D	E	F
2.2	225	A		B	C	D	E		F
3.3	335		B	C	D	E		F	G
4.7	475	B	C	D	E		F	G	H
6.8	685	C	D	E		F	G	H	
10	106	D	E		F		G	H	
15	156	E		F		G			
22	226		F		G	H			
33	336	F		G	H				
47	476		G						
68	686	G	H						
100	107	H							
150	157								
220	227								

CWR09 - MIL-PRF-55365/4

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR09C^225*@+□	A	2.2	4	8	1	10	12	6	8	8
CWR09C^475*@+□	B	4.7	4	8	1	10	12	6	8	8
CWR09C^685*@+□	C	6.8	4	5.5	1	10	12	6	8	8
CWR09C^106*@+□	D	10	4	4	1	10	12	8	8	10
CWR09C^156*@+□	E	15	4	3.5	1	10	12	8	10	12
CWR09C^336*@+□	F	33	4	2.2	2	20	24	8	10	12
CWR09C^686*@+□	G	68	4	1.1	3	30	36	10	12	12
CWR09C^107*@+□	H	100	4	0.9	4	40	48	10	12	12
CWR09D^155*@+□	A	1.5	6	8	1	10	12	6	8	8
CWR09D^335*@+□	B	3.3	6	8	1	10	12	6	8	8
CWR09D^475*@+□	C	4.7	6	5.5	1	10	12	6	8	8
CWR09D^685*@+□	D	6.8	6	4.5	1	10	12	6	8	8
CWR09D^106*@+□	E	10	6	3.5	1	10	12	8	10	12
CWR09D^226*@+□	F	22	6	2.2	2	20	24	8	10	12
CWR09D^476*@+□	G	47	6	1.1	3	30	36	10	12	12
CWR09D^686*@+□	H	68	6	0.9	4	40	48	10	12	12
CWR09F^105*@+□	A	1	10	10	1	10	12	6	8	8
CWR09F^225*@+□	B	2.2	10	8	1	10	12	6	8	8
CWR09F^335*@+□	C	3.3	10	5.5	1	10	12	6	8	8
CWR09F^475*@+□	D	4.7	10	4.5	1	10	12	6	8	8
CWR09F^685*@+□	E	6.8	10	3.5	1	10	12	6	8	8
CWR09F^156*@+□	F	15	10	2.5	2	20	24	8	8	10
CWR09F^336*@+□	G	33	10	1.1	3	30	36	10	12	12
CWR09F^476*@+□	H	47	10	0.9	5	50	60	10	12	12
CWR09H^684*@+□	A	0.68	15	12	1	10	12	6	8	8
CWR09H^155*@+□	B	1.5	15	8	1	10	12	6	8	8
CWR09H^225*@+□	C	2.2	15	5.5	1	10	12	6	8	8
CWR09H^335*@+□	D	3.3	15	5	1	10	12	6	8	8
CWR09H^475*@+□	E	4.7	15	4	1	10	12	6	8	8
CWR09H^106*@+□	F	10	15	2.5	2	20	24	6	8	8
CWR09H^226*@+□	G	22	15	1.1	4	40	48	6	8	8
CWR09H^336*@+□	H	33	15	0.9	5	50	60	8	8	10
CWR09J^474*@+□	A	0.47	20	14	1	10	12	8	10	10
CWR09J^684*@+□	B	0.68	20	10	1	10	12	6	8	8
CWR09J^105*@+□	B	1	20	12	1	10	12	6	8	8
CWR09J^155*@+□	C	1.5	20	6	1	10	12	6	8	8
CWR09J^225*@+□	D	2.2	20	5	1	10	12	6	8	8
CWR09J^335*@+□	E	3.3	20	4	1	10	12	6	8	8
CWR09J^685*@+□	F	6.8	20	2.4	2	20	24	6	8	8
CWR09J^156*@+□	G	15	20	1.1	3	30	36	6	8	8
CWR09J^226*@+□	H	22	20	0.9	4	40	48	6	8	8
CWR09K^334*@+□	A	0.33	25	15	1	10	12	6	8	8
CWR09K^684*@+□	B	0.68	25	7.5	1	10	12	6	8	8
CWR09K^105*@+□	C	1	25	6.5	1	10	12	6	8	8

TAZ Series



CWR09 - MIL-PRF-55365/4

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR09K^155*@+□	D	1.5	25	6.5	1	10	12	6	8	8
CWR09K^225*@+□	E	2.2	25	3.5	1	10	12	6	8	8
CWR09K^475*@+□	F	4.7	25	2.5	2	20	24	6	8	8
CWR09K^685*@+□	G	6.8	25	1.2	2	20	24	6	8	8
CWR09K^106*@+□	G	10	25	1.4	3	30	36	6	8	8
CWR09K^156*@+□	H	15	25	1	4	40	48	6	8	8
CWR09M^224*@+□	A	0.22	35	18	1	10	12	6	8	8
CWR09M^474*@+□	B	0.47	35	10	1	10	12	6	8	8
CWR09M^684*@+□	C	0.68	35	8	1	10	12	6	8	8
CWR09M^105*@+□	D	1	35	6.5	1	10	12	6	8	8
CWR09M^155*@+□	E	1.5	35	4.5	1	10	12	6	8	8
CWR09M^335*@+□	F	3.3	35	2.5	1	10	12	6	8	8
CWR09M^475*@+□	G	4.7	35	1.5	2	20	24	6	8	8
CWR09M^685*@+□	H	6.8	35	1.3	3	30	36	6	8	8
CWR09N^104*@+□	A	0.1	50	22	1	10	12	6	8	8
CWR09N^154*@+□	A	0.15	50	17	1	10	12	6	8	8
CWR09N^224*@+□	B	0.22	50	14	1	10	12	6	8	8
CWR09N^334*@+□	B	0.33	50	12	1	10	12	6	8	8
CWR09N^474*@+□	C	0.47	50	8	1	10	12	6	8	8
CWR09N^684*@+□	D	0.68	50	7	1	10	12	6	8	8
CWR09N^105*@+□	E	1	50	6	1	10	12	6	8	8
CWR09N^155*@+□	F	1.5	50	4	1	10	12	6	8	8
CWR09N^225*@+□	F	2.2	50	2.5	2	20	24	6	8	8
CWR09N^335*@+□	G	3.3	50	2	2	20	24	6	8	8
CWR09N^475*@+□	H	4.7	50	1.5	3	30	36	6	8	8



TAZ Series




CWR19 - MIL-PRF-55365/11



An extended range of capacitor ratings beyond CWR09 that is fully qualified to MIL-PRF-55365/11, this series represents the most flexible of surface mount form factors, offering nine case sizes. The molded construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The five smaller cases are characterized by their low profile con-

struction; with the A case being the world's smallest molded military tantalum. There are three termination finishes available: fused solder plated ("K" per MIL-PRF-55365), hot solder dipped ("C") and gold plated ("B"). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and requirements of NASA SP-R-0022A (Outgassing).

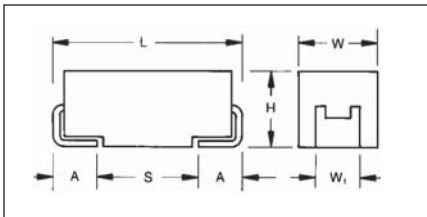

MARKING

(White marking on black body)



Polarity Stripe (+)

Capacitance Code
Rated Voltage

CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W _t)	Term. Length (A) ±0.13 (0.005)	S min
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.80 (0.071)
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41+0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68+0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	0.70 (0.028)
X	6.93 Max (0.273)	5.41 Max (0.213)	2.74 Max (0.108)	3.05±0.13 (0.120±0.005)	1.19 (0.047)	N/A

HOW TO ORDER

CWR19	J	-	225	*	@	D	+	□
Type	Voltage Code	Termination Finish	Capacitance Code	Capacitance Tolerance	Reliability Grade	Case Size	Surge Test Option	Packaging
	C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc	K = Fused Solder Plated C = Hot Solder Dipped B = Gold Plated	pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	M = ±20% K = ±10% J = ±5%	Weibull: B = 0.1%/1000 Hrs. (90% C = 0.01%/1000 Hrs. conf.) Comm: Z = Non ER		A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull Z = None required	Bulk = Standard TR = 7" T&R TR13 = 13" T&R W = Waffle

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.33 µF to 330 µF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage: (V _R)	≤85°C:	4	6	10	15	20	25	35	50	
Category Voltage: (V _C)	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V _S)	≤85°C:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	13	16	20	28	40	
Temperature Range:	-55°C to +125°C									



CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V_R) at 85°C							
μF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104								
0.15	154								
0.22	224								
0.33	334							A	
0.47	474						A		C
0.68	684					A		C	
1.0	105				A	A	B/C		
1.5	155				A	B/C			
2.2	225			A	A/C	B	D		
3.3	335	A	A	A/C	B	D	E		
4.7	475	A	A/C	B/C	B/C/D	E			
6.8	685	A/C	B	B/C/D	D/E	E	F	G	
10	106	B	B	B/C/D/E	D/E	E/F	G	H	
15	156	B	B/D/E	D/E	E/F	F	G	X	
22	226	B/D	D/E	E	F	G	G/H/X		
33	336	D/E	E	F	F/G	H	H/X		
47	476	E	F	F/G	G/H	H/X			
68	686	E	F/G	G	G/H				
100	107	F	G	G/H	H				
150	157	G	G	H/X					
220	227	G	H	H					
330	337	H	H						

CWR19 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR19C-335*@A+□	A	3.3	4	12	1	10	12	6	8	8
CWR19C-475*@A+□	A	4.7	4	12	1	10	12	6	8	8
CWR19C-685*@A+□	A	6.8	4	12	1	10	12	6	8	8
CWR19C-685*@C+□	C	6.8	4	5.5	1	10	12	6	8	8
CWR19C-106*@B+□	B	10	4	8	1	10	12	8	10	10
CWR19C-156*@B+□	B	15	4	8	1	10	12	8	10	10
CWR19C-226*@B+□	B	22	4	8	1	10	12	8	10	10
CWR19C-226*@D+□	D	22	4	4	1	10	12	8	10	12
CWR19C-336*@D+□	D	33	4	4	2	20	24	8	10	12
CWR19C-336*@E+□	E	33	4	3	2	20	24	8	10	12
CWR19C-476*@E+□	E	47	4	3	2	20	24	8	10	12
CWR19C-686*@E+□	E	68	4	3	3	30	36	8	10	12
CWR19C-107*@F+□	F	100	4	2	4	40	48	10	12	12
CWR19C-157*@G+□	G	150	4	1	6	60	72	10	12	12
CWR19C-227*@H+□	H	220	4	1	8	80	96	10	12	12
CWR19C-337*@H+□	H	330	4	0.9	10	100	120	10	12	12
CWR19D-335*@A+□	A	3.3	6	12	1	10	12	6	8	8
CWR19D-475*@A+□	A	4.7	6	12	1	10	12	6	8	8
CWR19D-475*@C+□	C	4.7	6	5.5	1	10	12	6	8	8
CWR19D-685*@B+□	B	6.8	6	8	1	10	12	6	8	8
CWR19D-106*@B+□	B	10	6	8	1	10	12	6	8	8
CWR19D-156*@B+□	B	15	6	8	1	10	12	8	10	10
CWR19D-156*@D+□	D	15	6	5	1	10	12	8	10	12
CWR19D-156*@E+□	E	15	6	3	1	10	12	8	10	12
CWR19D-226*@D+□	D	22	6	5	1	10	12	6	8	8
CWR19D-226*@E+□	E	22	6	3.5	2	20	24	8	10	12
CWR19D-336*@E+□	E	33	6	3.5	2	20	24	6	8	8
CWR19D-476*@F+□	F	47	6	3.5	3	30	36	8	10	12
CWR19D-686*@F+□	F	68	6	1.5	4	40	48	10	12	12
CWR19D-686*@G+□	G	68	6	1	4	40	48	10	12	12
CWR19D-107*@G+□	G	100	6	1.1	6	60	72	10	12	12
CWR19D-157*@G+□	G	150	6	1.1	10	100	120	10	12	12
CWR19D-227*@H+□	H	220	6	0.9	10	100	120	10	12	12
CWR19D-337*@H+□	H	330	6	0.9	20	200	240	10	12	12
CWR19F-225*@A+□	A	2.2	10	12	1	10	12	6	8	8
CWR19F-335*@A+□	A	3.3	10	12	1	10	12	6	8	8
CWR19F-335*@C+□	C	3.3	10	5.5	1	10	12	6	8	8
CWR19F-475*@B+□	B	4.7	10	8	1	10	12	6	8	8
CWR19F-475*@C+□	C	4.7	10	5.5	1	10	12	6	8	8
CWR19F-685*@B+□	B	6.8	10	8	1	10	12	6	8	8
CWR19F-685*@C+□	C	6.8	10	5.5	1	10	12	6	8	8
CWR19F-685*@D+□	D	6.8	10	5	1	10	12	6	8	8
CWR19F-106*@B+□	B	10	10	8	1	10	12	8	10	10

CWR19 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR19F-106*@C+□	C	10	10	5.5	1	10	12	6	8	8
CWR19F-106*@D+□	D	10	10	4	1	10	12	6	8	8
CWR19F-106*@E+□	E	10	10	3.5	1	10	12	6	8	8
CWR19F-156*@D+□	D	15	10	5	2	20	24	6	8	8
CWR19F-156*@E+□	E	15	10	3	2	20	24	8	10	10
CWR19F-226*@E+□	E	22	10	2	3	30	36	8	10	10
CWR19F-336*@F+□	F	33	10	1.5	3	30	36	8	10	10
CWR19F-476*@F+□	F	47	10	1.5	4	40	48	10	12	12
CWR19F-476*@G+□	G	47	10	1	4	40	48	10	12	12
CWR19F-686*@G+□	G	68	10	1.1	6	60	72	10	12	12
CWR19F-107*@G+□	G	100	10	1.1	10	100	120	10	12	12
CWR19F-107*@H+□	H	100	10	0.9	10	100	120	10	12	12
CWR19F-157*@H+□	H	150	10	0.9	15	150	180	10	12	12
CWR19F-157*@X+□	X	150	10	0.9	15	150	180	10	12	12
CWR19F-227*@H+□	H	220	10	0.9	20	200	240	10	12	12
CWR19H-105*@A+□	A	1	15	15	1	10	12	6	8	8
CWR19H-155*@A+□	A	1.5	15	15	1	10	12	6	8	8
CWR19H-225*@A+□	A	2.2	15	15	1	10	12	6	8	8
CWR19H-225*@C+□	C	2.2	15	5.5	1	10	12	6	8	8
CWR19H-335*@B+□	B	3.3	15	9	1	10	12	6	8	8
CWR19H-475*@B+□	B	4.7	15	5	1	10	12	6	8	8
CWR19H-475*@C+□	C	4.7	15	5.5	1	10	12	6	8	8
CWR19H-475*@D+□	D	4.7	15	6	1	10	12	6	8	8
CWR19H-685*@D+□	D	6.8	15	6	1	10	12	6	8	8
CWR19H-685*@E+□	E	6.8	15	3	1	10	12	8	10	12
CWR19H-106*@D+□	D	10	15	6	2	20	24	6	8	8
CWR19H-106*@E+□	E	10	15	4	2	20	24	6	8	8
CWR19H-156*@E+□	E	15	15	4	2	20	24	6	8	8
CWR19H-156*@F+□	F	15	15	3	2	20	24	8	10	10
CWR19H-226*@F+□	F	22	15	3	3	30	36	8	10	10
CWR19H-336*@F+□	F	33	15	3	5	50	60	6	8	8
CWR19H-336*@G+□	G	33	15	1.1	6	60	72	8	10	10
CWR19H-476*@G+□	G	47	15	1.1	10	100	120	8	10	10
CWR19H-476*@H+□	H	47	15	0.9	10	100	120	8	10	10
CWR19H-686*@G+□	G	68	15	1.1	10	100	120	8	10	10
CWR19H-686*@H+□	H	68	15	0.9	10	100	120	8	10	10
CWR19H-107*@H+□	H	100	15	0.9	15	150	180	10	12	12
CWR19J-684*@A+□	A	0.68	20	15	1	10	12	6	8	8
CWR19J-105*@A+□	A	1	20	15	1	10	12	6	8	8
CWR19J-155*@B+□	B	1.5	20	9	1	10	12	6	8	8
CWR19J-155*@C+□	C	1.5	20	6	1	10	12	6	8	8
CWR19J-225*@B+□	B	2.2	20	9	1	10	12	6	8	8
CWR19J-335*@D+□	D	3.3	20	6	1	10	12	6	8	8

TAZ Series



CWR19 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR19J-475*@E+□	E	4.7	20	6	1	10	12	6	8	8
CWR19J-685*@E+□	E	6.8	20	5	2	20	24	6	8	8
CWR19J-106*@E+□	E	10	20	5	2	20	24	6	8	8
CWR19J-106*@F+□	F	10	20	3	2	20	24	6	8	8
CWR19J-156*@F+□	F	15	20	3	3	30	36	6	8	8
CWR19J-226*@G+□	G	22	20	2.5	4	40	48	6	8	8
CWR19J-336*@H+□	H	33	20	0.9	6	60	72	8	10	10
CWR19J-476*@H+□	H	47	20	0.9	10	100	120	8	10	10
CWR19J-476*@X+□	X	47	20	0.9	10	100	120	8	10	10
CWR19K-474*@A+□	A	0.47	25	15	1	10	12	6	8	8
CWR19K-105*@B+□	B	1	25	10	1	10	12	6	8	8
CWR19K-105*@C+□	C	1	25	6.5	1	10	12	6	8	8
CWR19K-225*@D+□	D	2.2	25	6	1	10	12	6	8	8
CWR19K-335*@E+□	E	3.3	25	4	1	10	12	6	8	8
CWR19K-685*@F+□	F	6.8	25	3	2	20	24	6	8	8
CWR19K-156*@G+□	G	15	25	1.4	4	40	48	6	8	8
CWR19K-226*@G+□	G	22	25	1.4	6	60	72	6	8	8
CWR19K-226*@H+□	H	22	25	0.9	6	60	72	6	8	8
CWR19K-226*@X+□	X	22	25	0.9	6	60	72	6	8	8
CWR19K-336*@H+□	H	33	25	0.9	10	100	120	8	10	10
CWR19K-336*@X+□	X	33	25	0.9	10	100	120	8	10	10
CWR19M-334*@A+□	A	0.33	35	22	1	10	12	6	8	8
CWR19M-684*@C+□	C	0.68	35	10	1	10	12	6	8	8
CWR19M-685*@G+□	G	6.8	35	1.5	3	30	36	6	8	8
CWR19M-106*@H+□	H	10	35	0.9	4	40	48	8	10	10
CWR19M-156*@X+□	X	15	35	0.9	6	60	72	6	8	8
CWR19N-474*@C+□	C	0.47	50	8	1	10	12	6	8	8

TAZ Series




CWR29 - MIL-PRF-55365/11



A low ESR version of CWR09 and CWR19 that is fully qualified to MIL-PRF-55365/11, this series represents the most flexible of surface mount form factors, offering nine case sizes. The molded construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The five smaller cases are characterized by their low profile construction; with the

A case being the world's smallest molded military tantalum. There are three termination finishes available: fused solder plated ("K" per MIL-PRF-55365), hot solder dipped ("C") and gold plated ("B"). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and requirements of NASA SP-R-0022A (Outgassing).

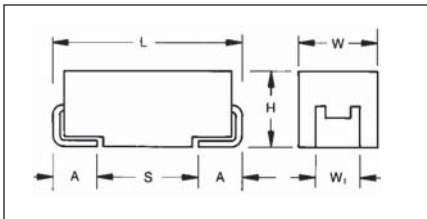

MARKING

(White marking on black body)



Polarity Stripe (+)

Capacitance Code
Rated Voltage

CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ±0.38 (0.015)	Width (W) ±0.38 (0.015)	Height (H) ±0.38 (0.015)	Term. Width (W _t)	Term. Length (A) ±0.13 (0.005)	S min
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.80 (0.071)
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	1.65 (0.065)
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27±0.13 (0.050±0.005)	0.76 (0.030)	2.92 (0.115)
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41±0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	1.65 (0.065)
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41±0.13/-0.25 (0.095+0.005/-0.010)	0.76 (0.030)	2.92 (0.115)
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30±0.13 (0.130±0.005)	0.76 (0.030)	3.43 (0.135)
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67±0.13 (0.105±0.005)	1.27 (0.050)	3.56 (0.140)
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68±0.13/-0.51 (0.145+0.005/-0.020)	1.27 (0.050)	0.70 (0.028)
X	6.93 Max (0.273)	5.41 Max (0.213)	2.74 Max (0.108)	3.05±0.13 (0.120±0.005)	1.19 (0.047)	N/A

HOW TO ORDER

CWR29

J

-

225

@

D

+

□

Type

Voltage Code

Termination Finish

Capacitance Code

Capacitance Tolerance

Reliability Grade

Case Size

Surge Test Option

Packaging

C = 4Vdc
D = 6Vdc
F = 10Vdc
H = 15Vdc
J = 20Vdc
K = 25Vdc
M = 35Vdc
N = 50Vdc

K = Fused Solder Plated
C = Hot Solder Dipped
B = Gold Plated

pF code:
1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)

M = ±20%
K = ±10%
J = ±5%

Weibull: B = 0.1%/1000 Hrs.
(90% C = 0.01%/1000 Hrs. conf.)
Comm: Z = Non ER

A = 10 cycles, +25°C
B = 10 cycles, -55°C & +85°C
C = 10 cycles, -55°C & +85°C before Weibull
Z = None required

Bulk = Standard
TR = 7" T&R
TR13 = 13" T&R
W = Waffle

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.33 µF to 330 µF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage: (V _R)	≤85°C:	4	6	10	15	20	25	35	50	
Category Voltage: (V _C)	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V _S)	≤85°C:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	13	16	20	28	40	
Temperature Range:	-55°C to +125°C									



CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V_R) at 85°C							
μF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104								A
0.15	154								A
0.22	224							A	B
0.33	334						A	A	B
0.47	474					A	A	B	C
0.68	684				A	A/B	B	C	D
1.0	105			A	A	A/B	B/C	D	E
1.5	155		A		A/B	B/C	D	E	F
2.2	225	A		A/B	A/C	B/D	D/E		F
3.3	335	A	A/B	A/C	B/D	D/E	E	F	G
4.7	475	A/B	A/C	B/C/D	B/C/D/E	E	F	G	H
6.8	685	A/C	B/D	B/C/D/E	D/E	E/F	F/G	G/H	
10	106	B/D	B/E	B/C/D/E	D/E/F	E/F	G	H	
15	156	B/E	B/D/E	D/E/F	E/F	F/G	G/H	X	
22	226	B/D	D/E/F	E	F/G	G/H	G/H/X		
33	336	D/E/F	E	F/G	F/G/H	H	H/X		
47	476	E	F/G	F/G/H	G/H	H/X			
68	686	E/G	F/G/H	G	G/H				
100	107	F/H	G	G/H	H				
150	157	G	G	H/X					
220	227	G	H	H					
330	337	H	H						

CWR29 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR29C-225*@A+□	A	2.2	4	4	1	10	12	6	8	8
CWR29C-335*@A+□	A	3.3	4	6	1	10	12	6	8	8
CWR29C-475*@A+□	A	4.7	4	6	1	10	12	6	8	8
CWR29C-475*@B+□	B	4.7	4	3.2	1	10	12	6	8	8
CWR29C-685*@A+□	A	6.8	4	6	1	10	12	6	8	8
CWR29C-685*@C+□	C	6.8	4	2.2	1	10	12	6	8	8
CWR29C-106*@B+□	B	10	4	3.2	1	10	12	8	10	10
CWR29C-106*@D+□	D	10	4	1.3	1	10	12	8	8	10
CWR29C-156*@B+□	B	15	4	3.2	1	10	12	8	10	10
CWR29C-156*@E+□	E	15	4	1	1	10	12	8	10	12
CWR29C-226*@B+□	B	22	4	3.2	1	10	12	8	10	10
CWR29C-226*@D+□	D	22	4	1.3	1	10	12	8	10	12
CWR29C-336*@D+□	D	33	4	1.3	2	20	24	8	10	12
CWR29C-336*@E+□	E	33	4	0.9	2	20	24	8	10	12
CWR29C-336*@F+□	F	33	4	0.6	2	20	24	8	10	12
CWR29C-476*@E+□	E	47	4	0.9	2	20	24	8	10	12
CWR29C-686*@E+□	E	68	4	0.9	3	30	36	8	10	12
CWR29C-686*@G+□	G	68	4	0.275	3	30	36	10	12	12
CWR29C-107*@F+□	F	100	4	0.55	4	40	48	10	12	12
CWR29C-107*@H+□	H	100	4	0.18	4	40	48	10	12	12
CWR29C-157*@G+□	G	150	4	0.25	6	60	72	10	12	12
CWR29C-227*@H+□	H	220	4	0.2	8	80	96	10	12	12
CWR29C-337*@H+□	H	330	4	0.18	10	100	120	10	12	12
CWR29D-155*@A+□	A	1.5	6	4	1	10	12	6	8	8
CWR29D-335*@A+□	A	3.3	6	6	1	10	12	6	8	8
CWR29D-335*@B+□	B	3.3	6	3.2	1	10	12	6	8	8
CWR29D-475*@A+□	A	4.7	6	6	1	10	12	6	8	8
CWR29D-475*@C+□	C	4.7	6	2.2	1	10	12	6	8	8
CWR29D-685*@B+□	B	6.8	6	3.2	1	10	12	6	8	8
CWR29D-685*@D+□	D	6.8	6	1.5	1	10	12	6	8	8
CWR29D-106*@B+□	B	10	6	3.2	1	10	12	6	8	8
CWR29D-106*@E+□	E	10	6	1	1	10	12	8	10	12
CWR29D-156*@B+□	B	15	6	3.2	1	10	12	8	10	10
CWR29D-156*@D+□	D	15	6	1.7	1	10	12	8	10	12
CWR29D-156*@E+□	E	15	6	0.9	1	10	12	8	10	12
CWR29D-226*@D+□	D	22	6	1.7	1	10	12	6	8	8
CWR29D-226*@E+□	E	22	6	1	2	20	24	8	10	12
CWR29D-226*@F+□	F	22	6	0.6	2	20	24	8	10	12
CWR29D-336*@E+□	E	33	6	1	2	20	24	6	8	8
CWR29D-476*@F+□	F	47	6	1	3	30	36	8	10	12
CWR29D-476*@G+□	G	47	6	0.275	3	30	36	10	12	12
CWR29D-686*@F+□	F	68	6	0.4	4	40	48	10	12	12
CWR29D-686*@G+□	G	68	6	0.25	4	40	48	10	12	12

CWR29 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR29D-686*@H+□	H	68	6	0.18	4	40	48	10	12	12
CWR29D-107*@G+□	G	100	6	0.275	6	60	72	10	12	12
CWR29D-157*@G+□	G	150	6	0.275	10	100	120	10	12	12
CWR29D-227*@H+□	H	220	6	0.18	10	100	120	10	12	12
CWR29D-337*@H+□	H	330	6	0.18	20	200	240	10	12	12
CWR29F-105*@A+□	A	1	10	5	1	10	12	6	8	8
CWR29F-225*@A+□	A	2.2	10	6	1	10	12	6	8	8
CWR29F-225*@B+□	B	2.2	10	3.2	1	10	12	6	8	8
CWR29F-335*@A+□	A	3.3	10	6	1	10	12	6	8	8
CWR29F-335*@C+□	C	3.3	10	2.2	1	10	12	6	8	8
CWR29F-475*@B+□	B	4.7	10	3.2	1	10	12	6	8	8
CWR29F-475*@C+□	C	4.7	10	2.2	1	10	12	6	8	8
CWR29F-475*@D+□	D	4.7	10	1.5	1	10	12	6	8	8
CWR29F-685*@B+□	B	6.8	10	3.2	1	10	12	6	8	8
CWR29F-685*@C+□	C	6.8	10	2.2	1	10	12	6	8	8
CWR29F-685*@D+□	D	6.8	10	1.7	1	10	12	6	8	8
CWR29F-685*@E+□	E	6.8	10	1	1	10	12	6	8	8
CWR29F-106*@B+□	B	10	10	3.2	1	10	12	8	10	10
CWR29F-106*@C+□	C	10	10	2.2	1	10	12	6	8	8
CWR29F-106*@D+□	D	10	10	1.3	1	10	12	6	8	8
CWR29F-106*@E+□	E	10	10	1	1	10	12	6	8	8
CWR29F-156*@D+□	D	15	10	1.7	2	20	24	6	8	8
CWR29F-156*@E+□	E	15	10	0.9	2	20	24	8	10	10
CWR29F-156*@F+□	F	15	10	0.7	2	20	24	8	8	10
CWR29F-226*@E+□	E	22	10	0.6	3	30	36	8	10	10
CWR29F-336*@F+□	F	33	10	0.4	3	30	36	8	10	10
CWR29F-336*@G+□	G	33	10	0.275	3	30	36	10	12	12
CWR29F-476*@F+□	F	47	10	0.4	4	40	48	10	12	12
CWR29F-476*@G+□	G	47	10	0.25	4	40	48	10	12	12
CWR29F-476*@H+□	H	47	10	0.18	5	50	60	10	12	12
CWR29F-686*@G+□	G	68	10	0.275	6	60	72	10	12	12
CWR29F-107*@G+□	G	100	10	0.275	10	100	120	10	12	12
CWR29F-107*@H+□	H	100	10	0.18	10	100	120	10	12	12
CWR29F-157*@H+□	H	150	10	0.18	15	150	180	10	12	12
CWR29F-157*@X+□	X	150	10	0.065	15	150	180	10	12	12
CWR29F-227*@H+□	H	220	10	0.18	20	200	240	10	12	12
CWR29H^684*@A+□	A	0.68	15	6	1	10	12	6	8	8
CWR29H^105*@A+□	A	1	15	7.5	1	10	12	6	8	8
CWR29H^155*@A+□	A	1.5	15	7.5	1	10	12	6	8	8
CWR29H^155*@B+□	B	1.5	15	3.2	1	10	12	6	8	8
CWR29H^225*@A+□	A	2.2	15	7.5	1	10	12	6	8	8
CWR29H^225*@C+□	C	2.2	15	2.2	1	10	12	6	8	8
CWR29H^335*@B+□	B	3.3	15	3.6	1	10	12	6	8	8
CWR29H^335*@D+□	D	3.3	15	1.7	1	10	12	6	8	8

CWR29 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR29H-475*@B+□	B	4.7	15	2	1	10	12	6	8	8
CWR29H-475*@C+□	C	4.7	15	2.2	1	10	12	6	8	8
CWR29H-475*@D+□	D	4.7	15	2	1	10	12	6	8	8
CWR29H-475*@E+□	E	4.7	15	1.2	1	10	12	6	8	8
CWR29H-685*@D+□	D	6.8	15	2	1	10	12	6	8	8
CWR29H-685*@E+□	E	6.8	15	0.9	1	10	12	8	10	12
CWR29H-106*@D+□	D	10	15	2	2	20	24	6	8	8
CWR29H-106*@E+□	E	10	15	1.2	2	20	24	6	8	8
CWR29H-106*@F+□	F	10	15	0.667	2	20	24	6	8	8
CWR29H-156*@E+□	E	15	15	1.2	2	20	24	6	8	8
CWR29H-156*@F+□	F	15	15	0.8	2	20	24	8	10	10
CWR29H-226*@F+□	F	22	15	0.8	3	30	36	8	10	10
CWR29H-226*@G+□	G	22	15	0.275	4	40	48	6	8	8
CWR29H-336*@F+□	F	33	15	0.8	5	50	60	6	8	8
CWR29H-336*@G+□	G	33	15	0.275	6	60	72	8	10	10
CWR29H-336*@H+□	H	33	15	0.18	5	50	60	8	8	10
CWR29H-476*@G+□	G	47	15	0.275	10	100	120	8	10	10
CWR29H-476*@H+□	H	47	15	0.18	10	100	120	8	10	10
CWR29H-686*@G+□	G	68	15	0.275	10	100	120	8	10	10
CWR29H-686*@H+□	H	68	15	0.18	10	100	120	8	10	10
CWR29H-107*@H+□	H	100	15	0.18	15	150	180	10	12	12
CWR29J-474*@A+□	A	0.47	20	7.5	1	10	12	8	8	10
CWR29J-684*@A+□	A	0.68	20	7.5	1	10	12	6	8	8
CWR29J-684*@B+□	B	0.68	20	5.6	1	10	12	6	8	8
CWR29J-105*@A+□	A	1	20	7.5	1	10	12	6	8	8
CWR29J-105*@B+□	B	1	20	4.8	1	10	12	6	8	8
CWR29J-155*@B+□	B	1.5	20	3.6	1	10	12	6	8	8
CWR29J-155*@C+□	C	1.5	20	2.4	1	10	12	6	8	8
CWR29J-225*@B+□	B	2.2	20	3.6	1	10	12	6	8	8
CWR29J-225*@D+□	D	2.2	20	1.7	1	10	12	6	8	8
CWR29J-335*@D+□	D	3.3	20	2	1	10	12	6	8	8
CWR29J-335*@E+□	E	3.3	20	1.2	1	10	12	6	8	8
CWR29J-475*@E+□	E	4.7	20	1.7	1	10	12	6	8	8
CWR29J-685*@E+□	E	6.8	20	1.5	2	20	24	6	8	8
CWR29J-685*@F+□	F	6.8	20	0.7	2	20	24	6	8	8
CWR29J-106*@E+□	E	10	20	1.5	2	20	24	6	8	8
CWR29J-106*@F+□	F	10	20	0.8	2	20	24	6	8	8
CWR29J-156*@F+□	F	15	20	0.8	3	30	36	6	8	8
CWR29J-156*@G+□	G	15	20	0.275	3	30	36	6	8	8
CWR29J-226*@G+□	G	22	20	0.625	4	40	48	6	8	8
CWR29J-226*@H+□	H	22	20	0.18	4	40	48	6	8	8
CWR29J-336*@H+□	H	33	20	0.18	6	60	72	8	10	10
CWR29J-476*@H+□	H	47	20	0.18	10	100	120	8	10	10
CWR29J-476*@X+□	X	47	20	0.11	10	100	120	8	10	10

CWR29 - MIL-PRF-55365/11

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
CWR29K-334*@A+□	A	0.33	25	7.5	1	10	12	6	8	8
CWR29K-474*@A+□	A	0.47	25	7.5	1	10	12	6	8	8
CWR29K-684*@B+□	B	0.68	25	4	1	10	12	6	8	8
CWR29K-105*@B+□	B	1	25	4	1	10	12	6	8	8
CWR29K-105*@C+□	C	1	25	2.6	1	10	12	6	8	8
CWR29K-155*@D+□	D	1.5	25	1.7	1	10	12	6	8	8
CWR29K-225*@D+□	D	2.2	25	2	1	10	12	6	8	8
CWR29K-225*@E+□	E	2.2	25	1	1	10	12	6	8	8
CWR29K-335*@E+□	E	3.3	25	1.2	1	10	12	6	8	8
CWR29K-475*@F+□	F	4.7	25	0.7	2	20	24	6	8	8
CWR29K-685*@F+□	F	6.8	25	0.8	2	20	24	6	8	8
CWR29K-685*@G+□	G	6.8	25	0.3	2	20	24	6	8	8
CWR29K-106*@G+□	G	10	25	0.35	3	30	36	6	8	8
CWR29K-156*@G+□	G	15	25	0.35	4	40	48	6	8	8
CWR29K-156*@H+□	H	15	25	0.2	4	40	48	6	8	8
CWR29K-226*@G+□	G	22	25	0.35	6	60	72	6	8	8
CWR29K-226*@H+□	H	22	25	0.18	6	60	72	6	8	8
CWR29K-226*@X+□	X	22	25	0.16	6	60	72	6	8	8
CWR29K-336*@H+□	H	33	25	0.18	10	100	120	6	8	8
CWR29K-336*@X+□	X	33	25	0.13	10	100	120	8	10	10
CWR29M-224*@A+□	A	0.22	35	12	1	10	12	6	8	8
CWR29M-334*@A+□	A	0.33	35	12	1	10	12	6	8	8
CWR29M-474*@B+□	B	0.47	35	6.8	1	10	12	6	8	8
CWR29M-684*@C+□	C	0.68	35	4	1	10	12	6	8	8
CWR29M-105*@D+□	D	1	35	2.2	1	10	12	6	8	8
CWR29M-155*@E+□	E	1.5	35	1.3	1	10	12	6	8	8
CWR29M-335*@F+□	F	3.3	35	0.7	1	10	12	6	8	8
CWR29M-475*@G+□	G	4.7	35	0.375	2	20	24	6	8	8
CWR29M-685*@G+□	G	6.8	35	0.375	3	30	36	6	8	8
CWR29M-685*@H+□	H	6.8	35	0.5	3	30	36	6	8	8
CWR29M-106*@H+□	H	10	35	0.5	4	40	48	8	10	10
CWR29M-156*@X+□	X	15	35	0.19	6	60	72	6	8	8
CWR29N-104*@A+□	A	0.1	50	12	1	10	12	6	8	8
CWR29N-154*@A+□	A	0.15	50	12	1	10	12	6	8	8
CWR29N-224*@B+□	B	0.22	50	6.8	1	10	12	6	8	8
CWR29N-334*@B+□	B	0.33	50	4.8	1	10	12	6	8	8
CWR29N-474*@C+□	C	0.47	50	3.2	1	10	12	6	8	8
CWR29N-684*@D+□	D	0.68	50	2.3	1	10	12	6	8	8
CWR29N-105*@E+□	E	1	50	1.7	1	10	12	6	8	8
CWR29N-155*@F+□	F	1.5	50	1.1	1	10	12	6	8	8
CWR29N-225*@F+□	F	2.2	50	0.7	2	20	24	6	8	8
CWR29N-335*@G+□	G	3.3	50	0.5	2	20	24	6	8	8
CWR29N-475*@H+□	H	4.7	50	0.5	3	30	36	6	8	8

TAZ Series




COTS-Plus



The TAZ part has fully molded, compliant leadframe construction designed for use in applications utilizing solder (Reflow, Wave or Vapor Phase), conductive adhesive or thermal compression bonding techniques. Each chip is marked with polarity, capacitance code and rate voltage.

The series comprises ten case sizes (see dimensional chart below) with the maximum size V case giving capacitance values to 470 μ F. The C case, with its non-standard aspect ratio, is retained as a QPL (Qualified Product List) only special.

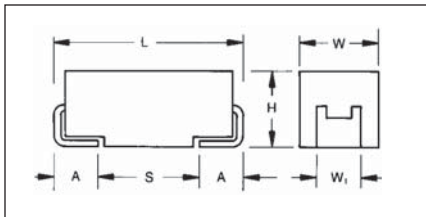

MARKING

(White marking on black body)



Polarity Stripe (+)

Capacitance Code
Rated Voltage

CASE DIMENSIONS:

millimeters (inches)

Case Code	Length (L) ± 0.38 (0.015)	Width (W) ± 0.38 (0.015)	Height (H) ± 0.38 (0.015)	Term. Width (W _t)	Term. Length (A) ± 0.13 (0.005)	S min
A	2.54 (0.100)	1.27 (0.050)	1.27 (0.050)	1.27 \pm 0.13 (0.050 \pm 0.005)	0.76 (0.030)	1.80 (0.071)
B	3.81 (0.150)	1.27 (0.050)	1.27 (0.050)	1.27 \pm 0.13 (0.050 \pm 0.005)	0.76 (0.030)	1.65 (0.065)
C	5.08 (0.200)	1.27 (0.050)	1.27 (0.050)	1.27 \pm 0.13 (0.050 \pm 0.005)	0.76 (0.030)	2.92 (0.115)
D	3.81 (0.150)	2.54 (0.100)	1.27 (0.050)	2.41 \pm 0.13/-0.25 (0.095 \pm 0.005/-0.010)	0.76 (0.030)	1.65 (0.065)
E	5.08 (0.200)	2.54 (0.100)	1.27 (0.050)	2.41 \pm 0.13/-0.25 (0.095 \pm 0.005/-0.010)	0.76 (0.030)	2.92 (0.115)
F	5.59 (0.220)	3.43 (0.135)	1.78 (0.070)	3.30 \pm 0.13 (0.130 \pm 0.005)	0.76 (0.030)	3.43 (0.135)
G	6.73 (0.265)	2.79 (0.110)	2.79 (0.110)	2.67 \pm 0.13 (0.105 \pm 0.005)	1.27 (0.050)	3.56 (0.140)
H	7.24 (0.285)	3.81 (0.150)	2.79 (0.110)	3.68 \pm 0.13/-0.51 (0.145 \pm 0.005/-0.020)	1.27 (0.050)	0.70 (0.028)
X	6.93 Max (0.273)	5.41 Max (0.213)	2.74 Max (0.108)	3.05 \pm 0.13 (0.120 \pm 0.005)	1.19 (0.047)	N/A

HOW TO ORDER

TAZ	H	227	*	006	C	□	#@	0^	++
Type	Case Size	Capacitance Code	Capacitance Tolerance	Voltage Code	Standard or Low ESR Range	Packaging	Qualification/Reliability	Termination Finish	Surge Test Option
		pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	M = $\pm 20\%$ K = $\pm 10\%$ J = $\pm 5\%$	004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	C = Std ESR L = Low ESR	B = Bulk R = 7" T&R S = 13" T&R	# = Inspection Level S = Std. Conformance L = Group A @ = Failure Rate Level Weibull: B = 0.1%/1000 hrs. (90% C = 0.01%/1000 hrs. conf.) Comm: Z = Non ER	09 = Gold Plated 08 = Hot Solder Dipped 00 = Solder Fused	00 = None 23 = 10 cycles, +25°C 24 = 10 cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.1 μ F to 470 μ F									
Capacitance Tolerance:	$\pm 5\%$; $\pm 10\%$; $\pm 20\%$									
Rated Voltage: (V _R)	$\leq 85^\circ\text{C}$:	4	6	10	15	20	25	35	50	
Category Voltage: (V _C)	125°C:	2.7	4	7	10	13	17	23	33	
Surge Voltage: (V _S)	$\leq 85^\circ\text{C}$:	5.2	8	13	20	26	32	46	65	
	125°C:	3.4	5	8	12	16	20	28	40	
Temperature Range:	-55°C to +125°C									



CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V_R) at 85°C							
μF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104								A
0.15	154								A
0.22	224							A	B
0.33	334						A	A	B
0.47	474					A	A	B	C
0.68	684				A	A/B	B	C	D
1.0	105			A	A	A/B	B/C	D	E
1.5	155		A		A/B	B/C	D	E	F
2.2	225	A		A/B	A/C	B/D	D/E		F
3.3	335	A	A/B	A/C	B/D	D/E	E	F	G
4.7	475	A/B	A/C	B/C/D	B/C/D/E	E	F	G	H
6.8	685	A/C	B/D	B/C/D/E	D/E	E/F	F/G	G/H	
10	106	B/D	B/E	B/C/D/E	D/E/F	E/F	G	H	
15	156	B/E	B/D/E	D/E/F	E/F	F/G	G/H	X	
22	226	B/D	D/E/F	E	F/G	G/H	G/H/X		
33	336	D/E/F	E	F/G	F/G/H	H	H/X		
47	476	E	F/G	F/G/H	G/H	H/X			
68	686	E/G	F/G/H	G	G/H				
100	107	F/H	G	G/H	H				
150	157	G	G	H/X					
220	227	G	H	H					
330	337	H	H						
470	447	H							

NOTE: TAZ Standard Range ratings are also available in CWR09 Military parts.

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZA225*004C□#@0^++	A	2.2	4	8	1	10	12	6	8	8
TAZA225*004L□#@0^++	A	2.2	4	4	1	10	12	6	8	8
TAZA335*004C□#@0^++	A	3.3	4	12	1	10	12	6	8	8
TAZA335*004L□#@0^++	A	3.3	4	6	1	10	12	6	8	8
TAZA475*004C□#@0^++	A	4.7	4	12	1	10	12	6	8	8
TAZA475*004L□#@0^++	A	4.7	4	6	1	10	12	6	8	8
TAZB475*004C□#@0^++	B	4.7	4	8	1	10	12	6	8	8
TAZB475*004L□#@0^++	B	4.7	4	3.2	1	10	12	6	8	8
TAZA685*004C□#@0^++	A	6.8	4	12	1	10	12	6	8	8
TAZA685*004L□#@0^++	A	6.8	4	6	1	10	12	6	8	8
TAZC685*004C□#@0^++	C	6.8	4	5.5	1	10	12	6	8	8
TAZC685*004L□#@0^++	C	6.8	4	5.5	1	10	12	6	8	8
TAZC685*004L□#@0^++	C	6.8	4	2.2	1	10	12	6	8	8
TAZB106*004C□#@0^++	B	10	4	8	1	10	12	8	10	10
TAZB106*004L□#@0^++	B	10	4	3.2	1	10	12	8	10	10
TAZD106*004C□#@0^++	D	10	4	4	1	10	12	8	8	10
TAZD106*004L□#@0^++	D	10	4	1.3	1	10	12	8	8	10
TAZB156*004C□#@0^++	B	15	4	8	1	10	12	8	10	10
TAZB156*004L□#@0^++	B	15	4	3.2	1	10	12	8	10	10
TAZE156*004C□#@0^++	E	15	4	3.5	1	10	12	8	10	12
TAZE156*004L□#@0^++	E	15	4	1	1	10	12	8	10	12
TAZB226*004C□#@0^++	B	22	4	8	1	10	12	8	10	10
TAZB226*004L□#@0^++	B	22	4	3.2	1	10	12	8	10	10
TAZD226*004C□#@0^++	D	22	4	4	1	10	12	8	10	12
TAZD226*004L□#@0^++	D	22	4	1.3	1	10	12	8	10	12
TAZD336*004C□#@0^++	D	33	4	4	2	20	24	8	10	12
TAZD336*004L□#@0^++	D	33	4	1.3	2	20	24	8	10	12
TAZE336*004C□#@0^++	E	33	4	3	2	20	24	8	10	12
TAZE336*004L□#@0^++	E	33	4	0.9	2	20	24	8	10	12
TAZF336*004C□#@0^++	F	33	4	2.2	2	20	24	8	10	12
TAZF336*004L□#@0^++	F	33	4	0.6	2	20	24	8	10	12
TAZE476*004C□#@0^++	E	47	4	3	2	20	24	8	10	12
TAZE476*004L□#@0^++	E	47	4	0.9	2	20	24	8	10	12
TAZE686*004C□#@0^++	E	68	4	3	3	30	36	8	10	12
TAZE686*004L□#@0^++	E	68	4	0.9	3	30	36	8	10	12
TAZG686*004C□#@0^++	G	68	4	1.1	3	30	36	10	12	12
TAZG686*004L□#@0^++	G	68	4	0.275	3	30	36	10	12	12
TAZF107*004C□#@0^++	F	100	4	2	4	40	48	10	12	12
TAZF107*004L□#@0^++	F	100	4	0.55	4	40	48	10	12	12
TAZH107*004C□#@0^++	H	100	4	0.9	4	40	48	10	12	12
TAZH107*004L□#@0^++	H	100	4	0.18	4	40	48	10	12	12
TAZG157*004C□#@0^++	G	150	4	1	6	60	72	10	12	12
TAZG157*004L□#@0^++	G	150	4	0.25	6	60	72	10	12	12
TAZH227*004C□#@0^++	H	220	4	1	8	80	96	10	12	12
TAZH227*004L□#@0^++	H	220	4	0.2	8	80	96	10	12	12

Following the voltage code, C designates Standard, L designates Low ESR Ratings

TAZ Series



COTS-Plus

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZH337*004C□#@0^++	H	330	4	0.9	10	100	120	10	12	12
TAZH337*004L□#@0^++	H	330	4	0.18	10	100	120	10	12	12
TAZH477*004L□#@0^++	H	470	4	0.9	19	190	228	10	12	12
TAZA155*006C□#@0^++	A	1.5	6	8	1	10	12	6	8	8
TAZA155*006L□#@0^++	A	1.5	6	4	1	10	12	6	8	8
TAZA335*006C□#@0^++	A	3.3	6	12	1	10	12	6	8	8
TAZA335*006L□#@0^++	A	3.3	6	6	1	10	12	6	8	8
TAZB335*006C□#@0^++	B	3.3	6	8	1	10	12	6	8	8
TAZB335*006L□#@0^++	B	3.3	6	3.2	1	10	12	6	8	8
TAZA475*006C□#@0^++	A	4.7	6	12	1	10	12	6	8	8
TAZA475*006L□#@0^++	A	4.7	6	6	1	10	12	6	8	8
TAZC475*006C□#@0^++	C	4.7	6	5.5	1	10	12	6	8	8
TAZC475*006L□#@0^++	C	4.7	6	5.5	1	10	12	6	8	8
TAZC475*006L□#@0^++	C	4.7	6	2.2	1	10	12	6	8	8
TAZB685*006C□#@0^++	B	6.8	6	8	1	10	12	6	8	8
TAZB685*006L□#@0^++	B	6.8	6	3.2	1	10	12	6	8	8
TAZD685*006C□#@0^++	D	6.8	6	4.5	1	10	12	6	8	8
TAZD685*006L□#@0^++	D	6.8	6	1.5	1	10	12	6	8	8
TAZB106*006C□#@0^++	B	10	6	8	1	10	12	6	8	8
TAZB106*006L□#@0^++	B	10	6	3.2	1	10	12	6	8	8
TAZE106*006C□#@0^++	E	10	6	3.5	1	10	12	8	10	12
TAZE106*006L□#@0^++	E	10	6	1	1	10	12	8	10	12
TAZB156*006C□#@0^++	B	15	6	8	1	10	12	8	10	10
TAZB156*006L□#@0^++	B	15	6	3.2	1	10	12	8	10	10
TAZD156*006C□#@0^++	D	15	6	5	1	10	12	8	10	12
TAZD156*006L□#@0^++	D	15	6	1.7	1	10	12	8	10	12
TAZE156*006C□#@0^++	E	15	6	3	1	10	12	8	10	12
TAZE156*006L□#@0^++	E	15	6	0.9	1	10	12	8	10	12
TAZD226*006C□#@0^++	D	22	6	5	1	10	12	6	8	8
TAZD226*006L□#@0^++	D	22	6	1.7	1	10	12	6	8	8
TAZE226*006C□#@0^++	E	22	6	3.5	2	20	24	8	10	12
TAZE226*006L□#@0^++	E	22	6	1	2	20	24	8	10	12
TAZF226*006C□#@0^++	F	22	6	2.2	2	20	24	8	10	12
TAZF226*006L□#@0^++	F	22	6	0.6	2	20	24	8	10	12
TAZE336*006C□#@0^++	E	33	6	3.5	2	20	24	6	8	8
TAZE336*006L□#@0^++	E	33	6	1	2	20	24	6	8	8
TAZF476*006C□#@0^++	F	47	6	3.5	3	30	36	8	10	12
TAZF476*006L□#@0^++	F	47	6	1	3	30	36	8	10	12
TAZG476*006C□#@0^++	G	47	6	1.1	3	30	36	10	12	12
TAZG476*006L□#@0^++	G	47	6	0.275	3	30	36	10	12	12
TAZF686*006C□#@0^++	F	68	6	1.5	4	40	48	10	12	12
TAZF686*006L□#@0^++	F	68	6	0.4	4	40	48	10	12	12
TAZG686*006C□#@0^++	G	68	6	1	4	40	48	10	12	12
TAZG686*006L□#@0^++	G	68	6	0.25	4	40	48	10	12	12
TAZH686*006C□#@0^++	H	68	6	0.9	4	40	48	10	12	12

Following the voltage code, C designates Standard, L designates Low ESR Ratings



TAZ Series



COTS-Plus

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZH686*006L□#@0^++	H	68	6	0.18	4	40	48	10	12	12
TAZG107*006C□#@0^++	G	100	6	1.1	6	60	72	10	12	12
TAZG107*006L□#@0^++	G	100	6	0.275	6	60	72	10	12	12
TAZG157*006C□#@0^++	G	150	6	1.1	10	100	120	10	12	12
TAZG157*006L□#@0^++	G	150	6	0.275	10	100	120	10	12	12
TAZH227*006C□#@0^++	H	220	6	0.9	10	100	120	10	12	12
TAZH227*006L□#@0^++	H	220	6	0.18	10	100	120	10	12	12
TAZH337*006C□#@0^++	H	330	6	0.9	20	200	240	10	12	12
TAZH337*006L□#@0^++	H	330	6	0.18	20	200	240	10	12	12
TAZA105*010C□#@0^++	A	1	10	10	1	10	12	6	8	8
TAZA105*010L□#@0^++	A	1	10	5	1	10	12	6	8	8
TAZA225*010C□#@0^++	A	2.2	10	12	1	10	12	6	8	8
TAZA225*010L□#@0^++	A	2.2	10	6	1	10	12	6	8	8
TAZB225*010C□#@0^++	B	2.2	10	8	1	10	12	6	8	8
TAZB225*010L□#@0^++	B	2.2	10	3.2	1	10	12	6	8	8
TAZA335*010C□#@0^++	A	3.3	10	12	1	10	12	6	8	8
TAZA335*010L□#@0^++	A	3.3	10	6	1	10	12	6	8	8
TAZC335*010C□#@0^++	C	3.3	10	5.5	1	10	12	6	8	8
TAZC335*010L□#@0^++	C	3.3	10	5.5	1	10	12	6	8	8
TAZC335*010L□#@0^++	C	3.3	10	2.2	1	10	12	6	8	8
TAZB475*010C□#@0^++	B	4.7	10	8	1	10	12	6	8	8
TAZB475*010L□#@0^++	B	4.7	10	3.2	1	10	12	6	8	8
TAZC475*010C□#@0^++	C	4.7	10	5.5	1	10	12	6	8	8
TAZC475*010L□#@0^++	C	4.7	10	2.2	1	10	12	6	8	8
TAZD475*010C□#@0^++	D	4.7	10	4.5	1	10	12	6	8	8
TAZD475*010L□#@0^++	D	4.7	10	1.5	1	10	12	6	8	8
TAZB685*010C□#@0^++	B	6.8	10	8	1	10	12	6	8	8
TAZB685*010L□#@0^++	B	6.8	10	3.2	1	10	12	6	8	8
TAZC685*010C□#@0^++	C	6.8	10	5.5	1	10	12	6	8	8
TAZC685*010L□#@0^++	C	6.8	10	2.2	1	10	12	6	8	8
TAZD685*010C□#@0^++	D	6.8	10	5	1	10	12	6	8	8
TAZD685*010L□#@0^++	D	6.8	10	1.7	1	10	12	6	8	8
TAZE685*010C□#@0^++	E	6.8	10	3.5	1	10	12	6	8	8
TAZE685*010L□#@0^++	E	6.8	10	1	1	10	12	6	8	8
TAZB106*010C□#@0^++	B	10	10	8	1	10	12	8	10	10
TAZB106*010L□#@0^++	B	10	10	3.2	1	10	12	8	10	10
TAZC106*010C□#@0^++	C	10	10	5.5	1	10	12	6	8	8
TAZC106*010L□#@0^++	C	10	10	2.2	1	10	12	6	8	8
TAZD106*010C□#@0^++	D	10	10	4	1	10	12	6	8	8
TAZD106*010L□#@0^++	D	10	10	1.3	1	10	12	6	8	8
TAZE106*010C□#@0^++	E	10	10	3.5	1	10	12	6	8	8
TAZE106*010L□#@0^++	E	10	10	1	1	10	12	6	8	8
TAZD156*010C□#@0^++	D	15	10	5	2	20	24	6	8	8
TAZD156*010L□#@0^++	D	15	10	1.7	2	20	24	6	8	8
TAZE156*010C□#@0^++	E	15	10	3	2	20	24	8	10	10

Following the voltage code, C designates Standard, L designates Low ESR Ratings

TAZ Series



COTS-Plus

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZE156*010L□#@0^++	E	15	10	0.9	2	20	24	8	10	10
TAZF156*010C□#@0^++	F	15	10	2.5	2	20	24	8	8	10
TAZF156*010L□#@0^++	F	15	10	0.7	2	20	24	8	8	10
TAZE226*010C□#@0^++	E	22	10	2	3	30	36	8	10	10
TAZE226*010L□#@0^++	E	22	10	0.6	3	30	36	8	10	10
TAZF336*010C□#@0^++	F	33	10	1.5	3	30	36	8	10	10
TAZF336*010L□#@0^++	F	33	10	0.4	3	30	36	8	10	10
TAZG336*010C□#@0^++	G	33	10	1.1	3	30	36	10	12	12
TAZG336*010L□#@0^++	G	33	10	0.275	3	30	36	10	12	12
TAZF476*010C□#@0^++	F	47	10	1.5	4	40	48	10	12	12
TAZF476*010L□#@0^++	F	47	10	0.4	4	40	48	10	12	12
TAZG476*010C□#@0^++	G	47	10	1	4	40	48	10	12	12
TAZG476*010L□#@0^++	G	47	10	0.25	4	40	48	10	12	12
TAZH476*010C□#@0^++	H	47	10	0.9	5	50	60	10	12	12
TAZH476*010L□#@0^++	H	47	10	0.18	5	50	60	10	12	12
TAZG686*010C□#@0^++	G	68	10	1.1	6	60	72	10	12	12
TAZG686*010L□#@0^++	G	68	10	0.275	6	60	72	10	12	12
TAZG107*010C□#@0^++	G	100	10	1.1	10	100	120	10	12	12
TAZG107*010L□#@0^++	G	100	10	0.275	10	100	120	10	12	12
TAZH107*010C□#@0^++	H	100	10	0.9	10	100	120	10	12	12
TAZH107*010L□#@0^++	H	100	10	0.18	10	100	120	10	12	12
TAZH157*010C□#@0^++	H	150	10	0.9	15	150	180	10	12	12
TAZH157*010L□#@0^++	H	150	10	0.18	15	150	180	10	12	12
TAZX157*010C□#@0^++	X	150	10	0.9	15	150	180	10	12	12
TAZX157*010L□#@0^++	X	150	10	0.065	15	150	180	10	12	12
TAZH227*010C□#@0^++	H	220	10	0.9	20	200	240	10	12	12
TAZH227*010L□#@0^++	H	220	10	0.18	20	200	240	10	12	12
TAZA684*015C□#@0^++	A	0.68	15	12	1	10	12	6	8	8
TAZA684*015L□#@0^++	A	0.68	15	6	1	10	12	6	8	8
TAZA105*015L□#@0^++	A	1	15	7.5	1	10	12	6	8	8
TAZA155*015C□#@0^++	A	1.5	15	15	1	10	12	6	8	8
TAZA155*015L□#@0^++	A	1.5	15	7.5	1	10	12	6	8	8
TAZB155*015C□#@0^++	B	1.5	15	8	1	10	12	6	8	8
TAZB155*015L□#@0^++	B	1.5	15	3.2	1	10	12	6	8	8
TAZA225*015C□#@0^++	A	2.2	15	15	1	10	12	6	8	8
TAZA225*015L□#@0^++	A	2.2	15	7.5	1	10	12	6	8	8
TAZC225*015C□#@0^++	C	2.2	15	5.5	1	10	12	6	8	8
TAZC225*015L□#@0^++	C	2.2	15	5.5	1	10	12	6	8	8
TAZC225*015L□#@0^++	C	2.2	15	2.2	1	10	12	6	8	8
TAZB335*015C□#@0^++	B	3.3	15	9	1	10	12	6	8	8
TAZB335*015L□#@0^++	B	3.3	15	3.6	1	10	12	6	8	8
TAZD335*015C□#@0^++	D	3.3	15	5	1	10	12	6	8	8
TAZD335*015L□#@0^++	D	3.3	15	1.7	1	10	12	6	8	8
TAZB475*015C□#@0^++	B	4.7	15	5	1	10	12	6	8	8
TAZB475*015L□#@0^++	B	4.7	15	2	1	10	12	6	8	8

Following the voltage code, C designates Standard, L designates Low ESR Ratings



Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZC475*015C□#@0^++	C	4.7	15	5.5	1	10	12	6	8	8
TAZC475*015L□#@0^++	C	4.7	15	2.2	1	10	12	6	8	8
TAZD475*015C□#@0^++	D	4.7	15	6	1	10	12	6	8	8
TAZD475*015L□#@0^++	D	4.7	15	2	1	10	12	6	8	8
TAZE475*015C□#@0^++	E	4.7	15	4	1	10	12	6	8	8
TAZE475*015L□#@0^++	E	4.7	15	1.2	1	10	12	6	8	8
TAZD685*015C□#@0^++	D	6.8	15	6	1	10	12	6	8	8
TAZD685*015L□#@0^++	D	6.8	15	2	1	10	12	6	8	8
TAZE685*015C□#@0^++	E	6.8	15	3	1	10	12	8	10	12
TAZE685*015L□#@0^++	E	6.8	15	0.9	1	10	12	8	10	12
TAZD106*015C□#@0^++	D	10	15	6	2	20	24	6	8	8
TAZD106*015L□#@0^++	D	10	15	2	2	20	24	6	8	8
TAZE106*015C□#@0^++	E	10	15	4	2	20	24	6	8	8
TAZE106*015L□#@0^++	E	10	15	1.2	2	20	24	6	8	8
TAZF106*015C□#@0^++	F	10	15	2.5	2	20	24	6	8	8
TAZF106*015L□#@0^++	F	10	15	0.667	2	20	24	6	8	8
TAZE156*015C□#@0^++	E	15	15	4	2	20	24	6	8	8
TAZE156*015L□#@0^++	E	15	15	1.2	2	20	24	6	8	8
TAZF156*015C□#@0^++	F	15	15	3	2	20	24	8	10	10
TAZF156*015L□#@0^++	F	15	15	0.8	2	20	24	8	10	10
TAZF226*015C□#@0^++	F	22	15	3	3	30	36	8	10	10
TAZF226*015L□#@0^++	F	22	15	0.8	3	30	36	8	10	10
TAZG226*015C□#@0^++	G	22	15	1.1	4	40	48	6	8	8
TAZG226*015L□#@0^++	G	22	15	0.275	4	40	48	6	8	8
TAZF336*015C□#@0^++	F	33	15	3	5	50	60	6	8	8
TAZF336*015L□#@0^++	F	33	15	0.8	5	50	60	6	8	8
TAZG336*015C□#@0^++	G	33	15	1.1	6	60	72	8	10	10
TAZG336*015L□#@0^++	G	33	15	0.275	6	60	72	8	10	10
TAZH336*015C□#@0^++	H	33	15	0.9	5	50	60	8	8	10
TAZH336*015L□#@0^++	H	33	15	0.18	5	50	60	8	8	10
TAZG476*015C□#@0^++	G	47	15	1.1	10	100	120	8	10	10
TAZG476*015L□#@0^++	G	47	15	0.275	10	100	120	8	10	10
TAZH476*015C□#@0^++	H	47	15	0.9	10	100	120	8	10	10
TAZH476*015L□#@0^++	H	47	15	0.18	10	100	120	8	10	10
TAZG686*015C□#@0^++	G	68	15	1.1	10	100	120	8	10	10
TAZG686*015L□#@0^++	G	68	15	0.275	10	100	120	8	10	10
TAZH686*015C□#@0^++	H	68	15	0.9	10	100	120	8	10	10
TAZH686*015L□#@0^++	H	68	15	0.18	10	100	120	8	10	10
TAZH107*015C□#@0^++	H	100	15	0.9	15	150	180	10	12	12
TAZH107*015L□#@0^++	H	100	15	0.18	15	150	180	10	12	12
TAZA474*020C□#@0^++	A	0.47	20	14	1	10	12	8	10	10
TAZA474*020L□#@0^++	A	0.47	20	7.5	1	10	12	8	8	10
TAZA684*020C□#@0^++	A	0.68	20	15	1	10	12	6	8	8
TAZA684*020L□#@0^++	A	0.68	20	7.5	1	10	12	6	8	8
TAZB684*020C□#@0^++	B	0.68	20	10	1	10	12	6	8	8

Following the voltage code, C designates Standard, L designates Low ESR Ratings

TAZ Series



COTS-Plus

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZB684*020L□#@0^++	B	0.68	20	5.6	1	10	12	6	8	8
TAZA105*020C□#@0^++	A	1	20	15	1	10	12	6	8	8
TAZA105*020L□#@0^++	A	1	20	7.5	1	10	12	6	8	8
TAZB105*020C□#@0^++	B	1	20	12	1	10	12	6	8	8
TAZB105*020L□#@0^++	B	1	20	4.8	1	10	12	6	8	8
TAZB155*020C□#@0^++	B	1.5	20	9	1	10	12	6	8	8
TAZB155*020L□#@0^++	B	1.5	20	3.6	1	10	12	6	8	8
TAZC155*020C□#@0^++	C	1.5	20	6	1	10	12	6	8	8
TAZC155*020L□#@0^++	C	1.5	20	6	1	10	12	6	8	8
TAZC155*020L□#@0^++	C	1.5	20	2.4	1	10	12	6	8	8
TAZB225*020C□#@0^++	B	2.2	20	9	1	10	12	6	8	8
TAZB225*020L□#@0^++	B	2.2	20	3.6	1	10	12	6	8	8
TAZD225*020C□#@0^++	D	2.2	20	5	1	10	12	6	8	8
TAZD225*020L□#@0^++	D	2.2	20	1.7	1	10	12	6	8	8
TAZD335*020C□#@0^++	D	3.3	20	6	1	10	12	6	8	8
TAZD335*020L□#@0^++	D	3.3	20	2	1	10	12	6	8	8
TAZE335*020C□#@0^++	E	3.3	20	4	1	10	12	6	8	8
TAZE335*020L□#@0^++	E	3.3	20	1.2	1	10	12	6	8	8
TAZE475*020C□#@0^++	E	4.7	20	6	1	10	12	6	8	8
TAZE475*020L□#@0^++	E	4.7	20	1.7	1	10	12	6	8	8
TAZE685*020C□#@0^++	E	6.8	20	5	2	20	24	6	8	8
TAZE685*020L□#@0^++	E	6.8	20	1.5	2	20	24	6	8	8
TAZF685*020C□#@0^++	F	6.8	20	2.4	2	20	24	6	8	8
TAZF685*020L□#@0^++	F	6.8	20	0.7	2	20	24	6	8	8
TAZE106*020C□#@0^++	E	10	20	5	2	20	24	6	8	8
TAZE106*020L□#@0^++	E	10	20	1.5	2	20	24	6	8	8
TAZF106*020C□#@0^++	F	10	20	3	2	20	24	6	8	8
TAZF106*020L□#@0^++	F	10	20	0.8	2	20	24	6	8	8
TAZF156*020C□#@0^++	F	15	20	3	3	30	36	6	8	8
TAZF156*020L□#@0^++	F	15	20	0.8	3	30	36	6	8	8
TAZG156*020C□#@0^++	G	15	20	1.1	3	30	36	6	8	8
TAZG156*020L□#@0^++	G	15	20	0.275	3	30	36	6	8	8
TAZG226*020C□#@0^++	G	22	20	2.5	4	40	48	6	8	8
TAZG226*020L□#@0^++	G	22	20	0.625	4	40	48	6	8	8
TAZH226*020C□#@0^++	H	22	20	0.9	4	40	48	6	8	8
TAZH226*020L□#@0^++	H	22	20	0.18	4	40	48	6	8	8
TAZH336*020C□#@0^++	H	33	20	0.9	6	60	72	8	10	10
TAZH336*020L□#@0^++	H	33	20	0.18	6	60	72	8	10	10
TAZH476*020C□#@0^++	H	47	20	0.9	10	100	120	8	10	10
TAZH476*020L□#@0^++	H	47	20	0.18	10	100	120	8	10	10
TAZX476*020C□#@0^++	X	47	20	0.9	10	100	120	8	10	10
TAZX476*020L□#@0^++	X	47	20	0.11	10	100	120	8	10	10
TAZA334*025C□#@0^++	A	0.33	25	15	1	10	12	6	8	8
TAZA334*025L□#@0^++	A	0.33	25	7.5	1	10	12	6	8	8
TAZA474*025C□#@0^++	A	0.47	25	15	1	10	12	6	8	8

Following the voltage code, C designates Standard, L designates Low ESR Ratings



Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZA474*025L□#@0^++	A	0.47	25	7.5	1	10	12	6	8	8
TAZB684*025C□#@0^++	B	0.68	25	7.5	1	10	12	6	8	8
TAZB684*025L□#@0^++	B	0.68	25	4	1	10	12	6	8	8
TAZB105*025C□#@0^++	B	1	25	10	1	10	12	6	8	8
TAZB105*025L□#@0^++	B	1	25	4	1	10	12	6	8	8
TAZC105*025C□#@0^++	C	1	25	6.5	1	10	12	6	8	8
TAZC105*025L□#@0^++	C	1	25	6.5	1	10	12	6	8	8
TAZC105*025L□#@0^++	C	1	25	2.6	1	10	12	6	8	8
TAZD155*025C□#@0^++	D	1.5	25	6.5	1	10	12	6	8	8
TAZD155*025L□#@0^++	D	1.5	25	1.7	1	10	12	6	8	8
TAZD225*025C□#@0^++	D	2.2	25	6	1	10	12	6	8	8
TAZD225*025L□#@0^++	D	2.2	25	2	1	10	12	6	8	8
TAZE225*025C□#@0^++	E	2.2	25	3.5	1	10	12	6	8	8
TAZE225*025L□#@0^++	E	2.2	25	1	1	10	12	6	8	8
TAZE335*025C□#@0^++	E	3.3	25	4	1	10	12	6	8	8
TAZE335*025L□#@0^++	E	3.3	25	1.2	1	10	12	6	8	8
TAZF475*025C□#@0^++	F	4.7	25	2.5	2	20	24	6	8	8
TAZF475*025L□#@0^++	F	4.7	25	0.7	2	20	24	6	8	8
TAZF685*025C□#@0^++	F	6.8	25	3	2	20	24	6	8	8
TAZF685*025L□#@0^++	F	6.8	25	0.8	2	20	24	6	8	8
TAZG685*025C□#@0^++	G	6.8	25	1.2	2	20	24	6	8	8
TAZG685*025L□#@0^++	G	6.8	25	0.3	2	20	24	6	8	8
TAZG106*025C□#@0^++	G	10	25	1.4	3	30	36	6	8	8
TAZG106*025L□#@0^++	G	10	25	0.35	3	30	36	6	8	8
TAZG156*025C□#@0^++	G	15	25	1.4	4	40	48	6	8	8
TAZG156*025L□#@0^++	G	15	25	0.35	4	40	48	6	8	8
TAZH156*025C□#@0^++	H	15	25	1	4	40	48	6	8	8
TAZH156*025L□#@0^++	H	15	25	0.2	4	40	48	6	8	8
TAZG226*025C□#@0^++	G	22	25	1.4	6	60	72	6	8	8
TAZG226*025L□#@0^++	G	22	25	0.35	6	60	72	6	8	8
TAZH226*025C□#@0^++	H	22	25	0.9	6	60	72	6	8	8
TAZH226*025L□#@0^++	H	22	25	0.18	6	60	72	6	8	8
TAZX226*025C□#@0^++	X	22	25	0.9	6	60	72	6	8	8
TAZX226*025L□#@0^++	X	22	25	0.16	6	60	72	6	8	8
TAZH336*025C□#@0^++	H	33	25	0.9	10	100	120	8	10	10
TAZH336*025L□#@0^++	H	33	25	0.18	10	100	120	6	8	8
TAZX336*025L□#@0^++	X	33	25	0.13	10	100	120	8	10	10
TAZX336*025C□#@0^++	X	33	25	0.9	10	100	120	8	10	10
TAZA224*035C□#@0^++	A	0.22	35	18	1	10	12	6	8	8
TAZA224*035L□#@0^++	A	0.22	35	12	1	10	12	6	8	8
TAZA334*035C□#@0^++	A	0.33	35	22	1	10	12	6	8	8
TAZA334*035L□#@0^++	A	0.33	35	12	1	10	12	6	8	8
TAZB474*035C□#@0^++	B	0.47	35	10	1	10	12	6	8	8
TAZB474*035L□#@0^++	B	0.47	35	6.8	1	10	12	6	8	8
TAZC684*035C□#@0^++	C	0.68	35	8	1	10	12	6	8	8

Following the voltage code, C designates Standard, L designates Low ESR Ratings

TAZ Series



COTS-Plus

Part Number	Case Size	Cap (nom) (μF)	DC rated voltage (85°C) (volts)	ESR (max) 100 kHz +25°C (ohms)	DC Leakage (max)			Dissipation Factor (max)		
					+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+85/125°C (%)	-55°C (%)
TAZC684*035C□#@0^++	C	0.68	35	10	1	10	12	6	8	8
TAZC684*035L□#@0^++	C	0.68	35	4	1	10	12	6	8	8
TAZD105*035C□#@0^++	D	1	35	6.5	1	10	12	6	8	8
TAZD105*035L□#@0^++	D	1	35	2.2	1	10	12	6	8	8
TAZE155*035C□#@0^++	E	1.5	35	4.5	1	10	12	6	8	8
TAZE155*035L□#@0^++	E	1.5	35	1.3	1	10	12	6	8	8
TAZF335*035C□#@0^++	F	3.3	35	2.5	1	10	12	6	8	8
TAZF335*035L□#@0^++	F	3.3	35	0.7	1	10	12	6	8	8
TAZG475*035C□#@0^++	G	4.7	35	1.5	2	20	24	6	8	8
TAZG475*035L□#@0^++	G	4.7	35	0.375	2	20	24	6	8	8
TAZG685*035C□#@0^++	G	6.8	35	1.5	3	30	36	6	8	8
TAZG685*035L□#@0^++	G	6.8	35	0.375	3	30	36	6	8	8
TAZH685*035C□#@0^++	H	6.8	35	1.3	3	30	36	6	8	8
TAZH685*035L□#@0^++	H	6.8	35	0.5	3	30	36	6	8	8
TAZH106*035C□#@0^++	H	10	35	0.9	4	40	48	8	10	10
TAZH106*035L□#@0^++	H	10	35	0.5	4	40	48	8	10	10
TAZX156*035C□#@0^++	X	15	35	0.9	6	60	72	6	8	8
TAZX156*035L□#@0^++	X	15	35	0.19	6	60	72	6	8	8
TAZA104*050C□#@0^++	A	0.1	50	22	1	10	12	6	8	8
TAZA104*050L□#@0^++	A	0.1	50	12	1	10	12	6	8	8
TAZA154*050C□#@0^++	A	0.15	50	17	1	10	12	6	8	8
TAZA154*050L□#@0^++	A	0.15	50	12	1	10	12	6	8	8
TAZB224*050C□#@0^++	B	0.22	50	14	1	10	12	6	8	8
TAZB224*050L□#@0^++	B	0.22	50	6.8	1	10	12	6	8	8
TAZB334*050C□#@0^++	B	0.33	50	12	1	10	12	6	8	8
TAZB334*050L□#@0^++	B	0.33	50	4.8	1	10	12	6	8	8
TAZC474*050C□#@0^++	C	0.47	50	8	1	10	12	6	8	8
TAZC474*050L□#@0^++	C	0.47	50	8	1	10	12	6	8	8
TAZC474*050L□#@0^++	C	0.47	50	3.2	1	10	12	6	8	8
TAZD684*050C□#@0^++	D	0.68	50	7	1	10	12	6	8	8
TAZD684*050L□#@0^++	D	0.68	50	2.3	1	10	12	6	8	8
TAZE105*050C□#@0^++	E	1	50	6	1	10	12	6	8	8
TAZE105*050L□#@0^++	E	1	50	1.7	1	10	12	6	8	8
TAZF155*050C□#@0^++	F	1.5	50	4	1	10	12	6	8	8
TAZF155*050L□#@0^++	F	1.5	50	1.1	1	10	12	6	8	8
TAZF225*050C□#@0^++	F	2.2	50	2.5	2	20	24	6	8	8
TAZF225*050L□#@0^++	F	2.2	50	0.7	2	20	24	6	8	8
TAZG335*050C□#@0^++	G	3.3	50	2	2	20	24	6	8	8
TAZG335*050L□#@0^++	G	3.3	50	0.5	2	20	24	6	8	8
TAZH475*050C□#@0^++	H	4.7	50	1.5	3	30	36	6	8	8
TAZH475*050L□#@0^++	H	4.7	50	0.5	3	30	36	6	8	8

Following the voltage code, C designates Standard, L designates Low ESR Ratings

