


Product Search Data Sheet

CSTCC3M58G56A-R0

discontinued AEC-Q200 RoHS REACH

Appearance & Shape

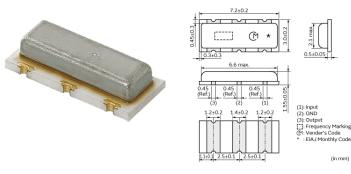

Note: This datasheet may be out of date. Please download the latest datasheet of CSTCC3M58G56A-R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=CSTCC3M58G56A-R0



MURATA's frequency adjustment and package technology expertise has enabled the development of the chip CERALOCK(R) with built-in load capacitors. This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features

1. The series has high reliability and is available for a wide temperature range.

- 2. Oscillation circuits do not require external load capacitors.
- 3. The series is available in a wide frequency range.
- 4. The resonators are extremely small and have a low profile.
- 5. No adjustment is necessary for oscillation circuits.

Applications

Automotive Usage	Powertrain/Safety
Other Usage	Automotive

Packaging Information

	Specifications	Standard
Packaging		Packing
		Quantity
R0	180mm Embossed Tape	2000

1 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





CSTCC3M58G56A-R0

Note: This datasheet may be out of date. Please download the latest datasheet of CSTCC3M58G56A-R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=CSTCC3M58G56A-R0

Specifications

Product Type	Ceramic Resonator (CERALOCK)
Series	CSTCC_G_A
Frequency	3.580MHz
Frequency Tolerance	+/-0.50% max.
Operating Temperature Range	-40°C~125°C
Frequency Shift by Temperature	+/-0.40% max.
Frequency Aging	+/-0.30% max.
Resonant Impedance (R1)	50ohm max.
Built-in Load Capacitance (CL1/CL2)	47pF
Shape	SMD
Wash	available
L x W (size)	7.2x3.0mm
Mass	82mg

2 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

