




Resonators

CERALOCK® for MHz

CSTCR_G_B Series

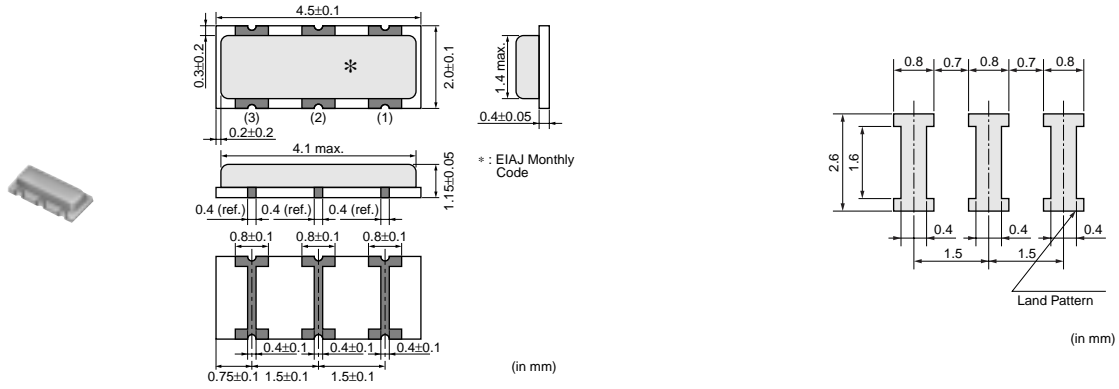

Frequency Range	Tolerance	Stability	Operating Temperature Range	Aging (10 years)	Washing	Ultrasonic Wash	Capacitor	Frequency Tolerance
4.00 to 7.99MHz	±0.5%	±0.15%	-40 to 125°C	±0.05%	Available	Available	Built in	Tight tolerance frequency (Intra ±0.1%)

Note • This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specification or transact the approval sheet for product specification before ordering. Especially, please read rating and **CAUTION** (for storage and operating, rating, soldering and mounting, handling) in them to prevent smoking and/or burning, etc.
 • You are able to read a detailed specification in the website (<http://search.murata.co.jp/>) before to require our product specification or to transact the approval sheet for product specification.