


Surface Mount Chip Resistors Style CW

General Specifications


- **Resistance:** 50 and 100 Ω standard.
- **Resistive Tolerance:** $\pm 5\%$ Standard (2% Available).
- **Operating Temp Range:** -55 to +150°C
- **Temperature Coefficient:** ± 150 ppm/°C
- **Resistive Elements:** Proprietary film.
- **Substrate Material:** Aluminum Nitride.
- **Terminals:** Silver over Nickel
- **Reliability:** MIL-PRF-55342

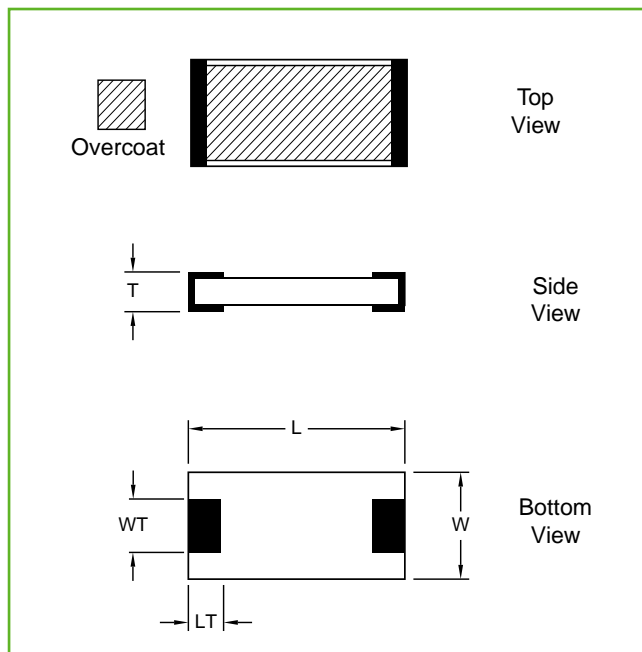


ATC Part Number	W $\pm .010$	L $\pm .010$	T $\pm .005$	WT $\pm .005$	LT $\pm .005$	Power Max* (Watts)
CW11005T0100G	.050	.100	.025	.045	.030	2
CW12010T0100G	.100	.200	.040	.090	.030	4
CW12525T0100G	.245	.245	.040	.120	.040	6
CW13725T0100G	.250	.375	.040	.120	.050	8
CW13737T0100G	.370	.370	.040	.360	.050	10

* Test Condition: Chip soldered to a via patch on a 30-mil-thick Rogers RO4350 board; Land surfaces at 100° C; maximum rated power applied.
 Specification: The resistance of the film shall change no more than 0.5% during and after a 1000-hr. Burn-in per Mil-PRF-55342


Power Derating

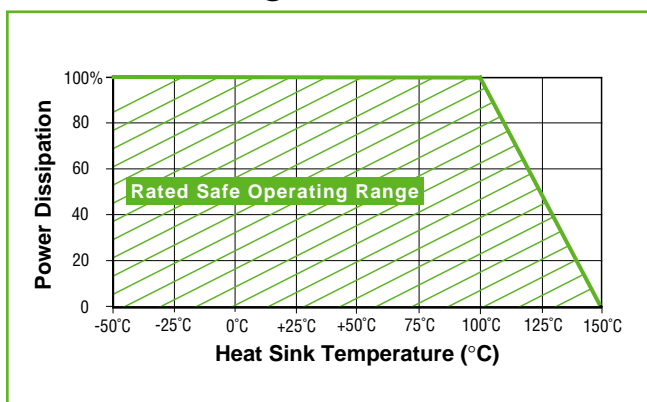

ATC Part Number Code

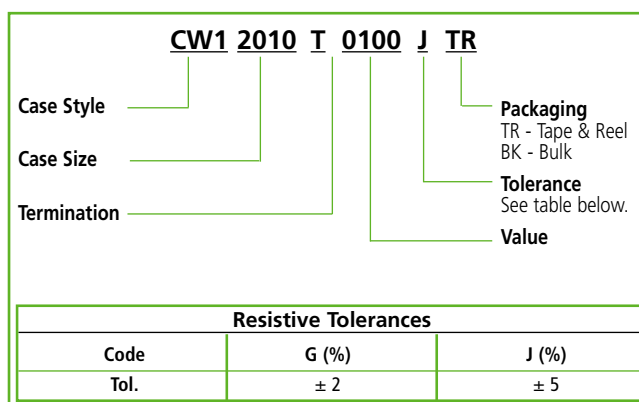

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.
 © 2002 American Technical Ceramics ATC 001-971 Rev. B; 2/03



AMERICAN TECHNICAL CERAMICS
 COMPONENT AND CUSTOM INTEGRATED PACKAGING SOLUTIONS
 FOR RF, MICROWAVE AND TELECOMMUNICATIONS