

High Performance Low Pass Filter

LP1206A0720ANTR



ITF TECHNOLOGY

The ITF LGA Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly. The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

FEATURES:

- Small size: 1206
- Frequency: 725MHz
- Characteristic impedance: 50Ω
- Operating / Storage temp: -40°C ÷ +85°C
- Low profile
- Rugged construction
- Taped and reeled
- RoHS compliant

APPLICATIONS:

- Mobile communications
- Satellite TV receivers
- GPS
- Vehicle location systems
- Wireless LAN's

FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance : 125°C, IR, 4 hours

TERMINATION:

Nickel/ Lead free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.


PART NUMBER CODE:

LP 1206 A XXXX ANTR
Frequency
(MHz)

POWER RATING:


12W continuous

DIMENSIONS - mm (inches) (Bottom View)

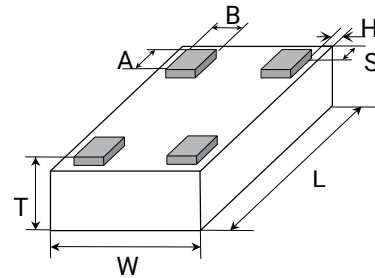


L	3.10±0.10 (0.122±0.004)	A	0.39±0.10 0.015±0.004
W	1.60±0.10 (0.063±0.004)	B	0.33±0.10 0.013±0.004
T	0.60±0.30 (0.024±0.012)	H, S	0.05±0.05 (0.002±0.002)


TERMINALS (Top View)

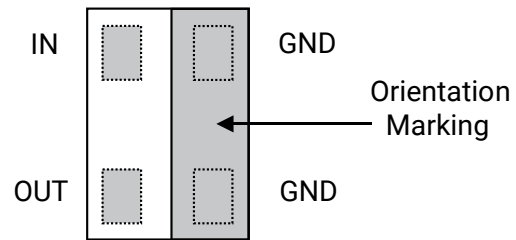

RECOMMENDED PAD LAYOUT (mm)



ORIENTATION IN TAPE

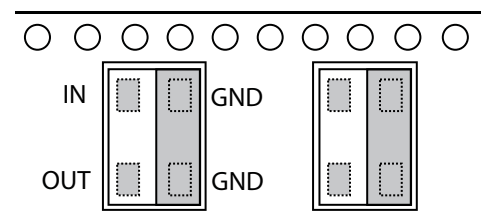

The Important Information/Disclaimer is incorporated in these specifications by reference and should be reviewed in full before placing any order.

High Performance Low Pass Filter

LP1206A0720ANTR



ELECTRICAL CHARACTERISTICS

LP1206A0600ANTR			
Parameter	Value	Unit	Notes
Fc	720	MHz	
Rejection @875MHz	-15	dB	Min. @875-2500MHz
Insertion Loss	1.2	dB	Max.
VSWR	1.49:1	dB	typ.
Power Handling	12	W	RF cont.
Impedance	50	Ohm	
Operating Temp.	-40 to +85	degC	
Size	1206		

TYPICAL ELECTRICAL PERFORMANCE

