


**Product Name** 3-terminal Filters Array  
**Series** MEA Series  
**Type** 1608PE Type  
**Part Number** MEA1608PE150TA0G

Product Lifecycle Stage Production

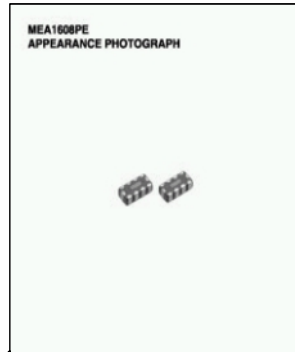

Specification		
Mounting Method Flag	Yes	
Processing	multilayer type	
Shape	Chip-Array	
Circuit Type	Pi Type	
Number of Circuits	Nom	4
Size Code	1608	
Body Length(L)	Nom	1.6 m m
Body Breadth(W)	Nom	0.8 m m
Body Height(T)	Nom	0.5 m m
Cut-Off Frequency	Nom	200 M Hz
Rated Capacitance	Nom	15 p F
Rated Voltage	Max	6.3 V
Rated Current	Max	0.1 A
Polarity Marking	No	
Soldering Method	Reflow,Iron Soldering	
Operating Temperature Range	Min	-40 Cel
	Max	85 Cel
Storage Temperature Range	Min	-40 Cel
	Max	85 Cel
Weight	Nom	0.0035 g

### Summary/Applications/Features

Summary	Pi-type 4line array EMC 3-terminal filters with magnetic shield and sharp attenuation characteristics.
Applications	For LCD and camera signal lines in mobile phone.
Features	4-line LC filter are built in a one chip for high-density circuit design. 0.5mm low profile.
	For improvement of the mobile phone frame(bit) error rate. This product is suitable for the LCD signal lines in mobile phone.

### Packaging

Packing	Blister (Plastic)Taping [180mm Reel]	
Minumum Package Qty	Nom	4000 Pcs
Minimum Order Qty	Nom	4000 Pcs

[Details](#)
[Catalog Info.](#)

#### ⚠ [ Caution ]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

#### ⚠ [ Notice of Revision and Improve ]

All specifications are subject to change without notice.