

RoHS Reach Halogen Free Pb Free

| Applications  | Commercial Grade   |
|---------------|--|
|               | Wire Wound Wire Wound  |
| Feature       | Shield Magnetic Shield   |
|               | Ferrite Core Ferrite Core  |
| Series   Type | VLF-M  |
| Status        | ↑ Obsolete   |
|               | Recommended Alternate Part No. : <u>VLS252012HBX-6R8M-1</u> (Interchangeability is |
|               | not guaranteed.)   |
|               | Discontinue Issue Date : May.18, 2017  |
|               | Last Purchase Order Date : Mar.31, 2021  |
|               | Last Shipment Date : Sep.30, 2021  |
| Brand         | TDK  |



|                              | Size           |  |
|------------------------------|----------------|--|
| Length(L)                    | 2.50mm ±0.20mm |  |
| Width(W)                     | 2.00mm ±0.20mm |  |
| Thickness   Height           | 1.20mm Max.    |  |
| Recommended Land Pattern (A) | 0.75mm Nom.    |  |
| Recommended Land Pattern (B) | 0.60mm Nom.    |  |
| Recommended Land Pattern (C) | 1.30mm Nom.    |  |

| Electrical Characteristics              |                    |  |  |  |
|---|--------------------|--|--|--|
| Inductance                              | 6.8μH ±20% at 1MHz |  |  |  |
| Rated Current (L Change) [Typ.]         | 560mA (30% Down)   |  |  |  |
| Rated Current (L Change) [Max.]         | 504mA (30% Down)   |  |  |  |
| Rated Current (Temperature Rise) [Typ.] | 890mA (40°C Rise)  |  |  |  |
| Rated Current (Temperature Rise) [Max.] |                    |  |  |  |
| DC Resistance [Typ.]                    | 280mΩ              |  |  |  |
| DC Resistance [Max.]                    | 340mΩ              |  |  |  |
| Self Resonant Frequency [Min.]          |                    |  |  |  |
| Self Resonant Frequency [Typ.]          |                    |  |  |  |
| Q [Min.]                                |                    |  |  |  |
| Q [Typ.]                                |                    |  |  |  |

| Other   |                                       |  |  |  |
|---|---------------------------------------|--|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 105°C                          |  |  |  |
| Soldering Method                                  | Reflow                                |  |  |  |
| AEC-Q200  | NO                                    |  |  |  |
| Packing   | Embossed (Plastic)Taping [180mm Reel] |  |  |  |

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.



2 of 5 Creation Date : October 06, 2022 (GMT)


RoHS Reach Halogen Free Pb Free


| Package Quantity | 2000pcs |
|------------------|---------|
| Weight           | 0.021g  |


! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.


RoHS Reach Halogen Free Pb Free


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

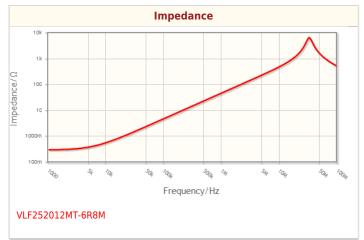


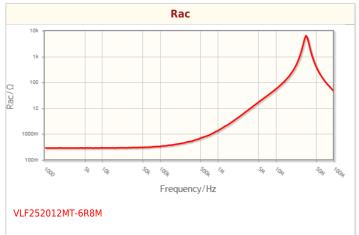

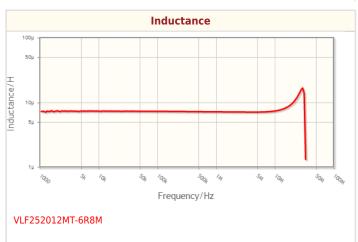

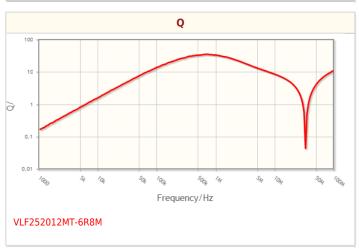

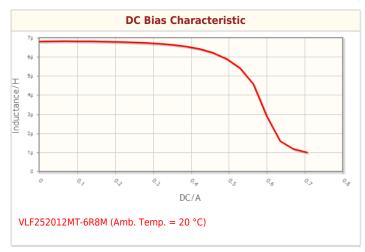

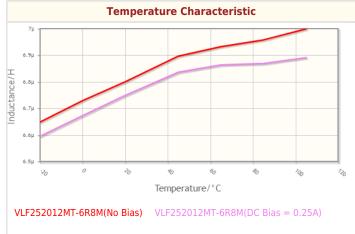


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

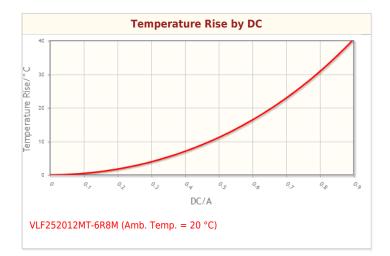

<sup>!</sup> Images are for reference only and show exemplary products.


<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

 $<sup>! \ \</sup>mbox{All specifications}$  are subject to change without notice.



VLF252012MT-6R8M RoHS Reach Halogen Free Pb Free

## **Associated Images**



 $<sup>! \ \</sup>mbox{Images}$  are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

 $<sup>! \ \</sup>mbox{All specifications}$  are subject to change without notice.