

| Applications  | Automotive Grade  |  |
|---------------|---|--|
| Feature       | AEC-Q200 AEC-Q200 Wire Wound Wire Wound Shield Magnetic Shield Ferrite Core |  |
| Series   Type | CLF-D   |  |
| Status        | Production  |  |
| Brand         | TDK   |  |



| Size                         |                 |  |
|------------------------------|-----------------|--|
| Length(L)                    | 10.00mm ±0.30mm |  |
| Width(W)                     | 9.70mm ±0.30mm  |  |
| Thickness   Height           | 3.80mm ±0.30mm  |  |
| Recommended Land Pattern (A) | 2.50mm Nom.     |  |
| Recommended Land Pattern (B) | 5.60mm Nom.     |  |
| Recommended Land Pattern (C) | 3.20mm Nom.     |  |


| Electrical Characteristics              |                                |  |  |
|---|--------------------------------|--|--|
| Inductance                              | $33\mu H \pm 20\%$ at $100kHz$ |  |  |
| Rated Current (L Change) [Typ.]         | 2.2A (10% Down)                |  |  |
| Rated Current (L Change) [Max.]         |                                |  |  |
| Rated Current (Temperature Rise) [Typ.] | 1.7A (30°C Rise)               |  |  |
| Rated Current (Temperature Rise) [Max.] |                                |  |  |
| DC Resistance [Typ.]                    | 80mΩ                           |  |  |
| DC Resistance [Max.]                    | 96mΩ                           |  |  |
| Self Resonant Frequency [Min.]          |                                |  |  |
| Self Resonant Frequency [Typ.]          |                                |  |  |
| Q [Min.]                                |                                |  |  |
| Q [Typ.]                                |                                |  |  |


| Other   |                                    |  |  |
|---|------------------------------------|--|--|
| Operating Temp. Range (Including Self-Temp. Rise) | -40 to 150°C                       |  |  |
| Caldarian Mathad                                  | Reflow                             |  |  |
| Soldering Method                                  | Iron Soldering                     |  |  |
| AEC-Q200  | YES                                |  |  |
| Packing   | Punched (Paper)Taping [330mm Reel] |  |  |
| Package Quantity                                  | 800pcs                             |  |  |
| Weight  | 1.3g                               |  |  |


<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


<sup>!</sup> All specifications are subject to change without notice.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

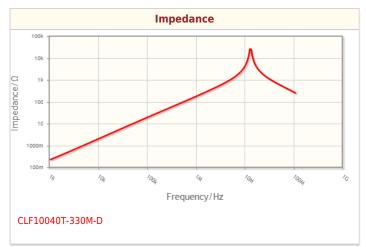


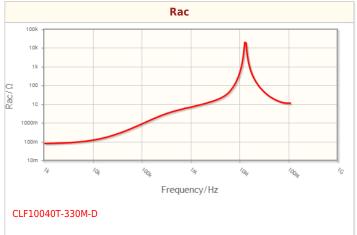

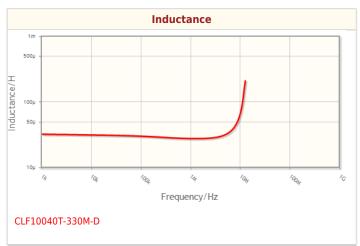

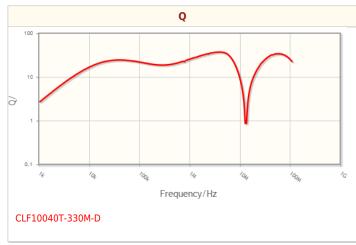



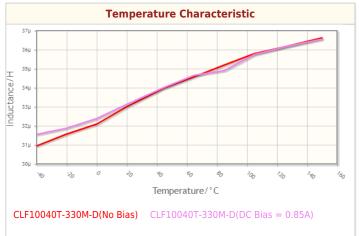


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

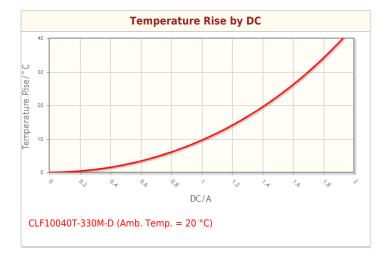



<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

## **Associated Images**





 $<sup>!\ \</sup>mbox{Images}$  are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.