SMD / SMT Inductors (Coils) NLC565050T-561K-PF

Applications	Commercial Grade	
	No Directivity No Directivity	•
Feature	Wire Wound Wire Wound	
	Ferrite Core	
Series Type	NLC565050	1 180
	A Obsolete	1 200
	Recommended Alternate Part No. : None	
Status	Discontinue Issue Date : May.21, 2015	2
	Last Purchase Order Date : Dec.22, 2016	
	Last Shipment Date : Jun.30, 2017	
Brand	ток	-

Size		
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics			
Inductance	560µH ±10% at 796kHz		
Rated Current	110mA		
DC Resistance [Typ.]			
DC Resistance [Max.]	8.5Ω		
Self Resonant Frequency [Min.]	2.4MHz		
Self Resonant Frequency [Typ.]			
Q [Min.]	20 at 796kHz		
Q [Typ.]			


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	400pcs	
Weight	0.38g	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

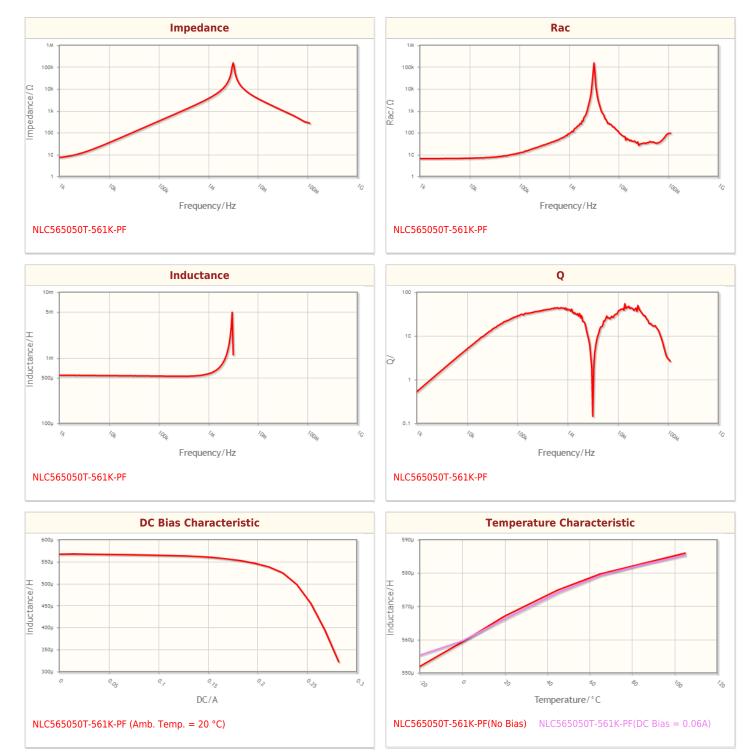


 $! \ \mbox{Images}$ are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Associated Images

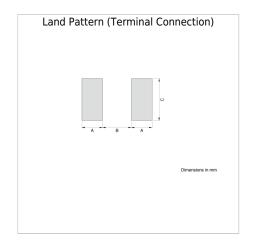

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

 $! \ \mbox{All specifications} \ \mbox{are subject to change without notice.}$