SMD / SMT Inductors (Coils) NLV32T-1R5J-PF

RoHS Reach Halogen Free

Applications	Commercial Grade	
Feature	No Directivity No Directivity Wire Wound Ferrite Core Ferrite Core	
Series Type	NLV32-PF	
Status	Production (Not Recommended for New Design) Recommended Alternate Part No. : <u>NLV32T-1R5J-EF</u> (Interchangeability is not	
	guaranteed.)	
Brand	TDK	

2	Size
Length(L)	3.20mm ±0.20mm
Width(W)	2.50mm ±0.20mm
Thickness Height	2.20mm ±0.20mm
Recommended Land Pattern (A)	1.20mm Nom.
Recommended Land Pattern (B)	2.00mm Nom.
Recommended Land Pattern (C)	2.00mm Nom.

Electrical Characteristics			
Inductance	1.5µH ±5% at 7.96MHz		
Rated Current	370mA		
DC Resistance [Typ.]			
DC Resistance [Max.]	850mΩ		
Self Resonant Frequency [Min.]	85MHz		
Self Resonant Frequency [Typ.]			
Q [Min.]	30 at 7.96MHz		
Q [Typ.]			

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.05g	


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved. Downloaded from Arrow.com.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

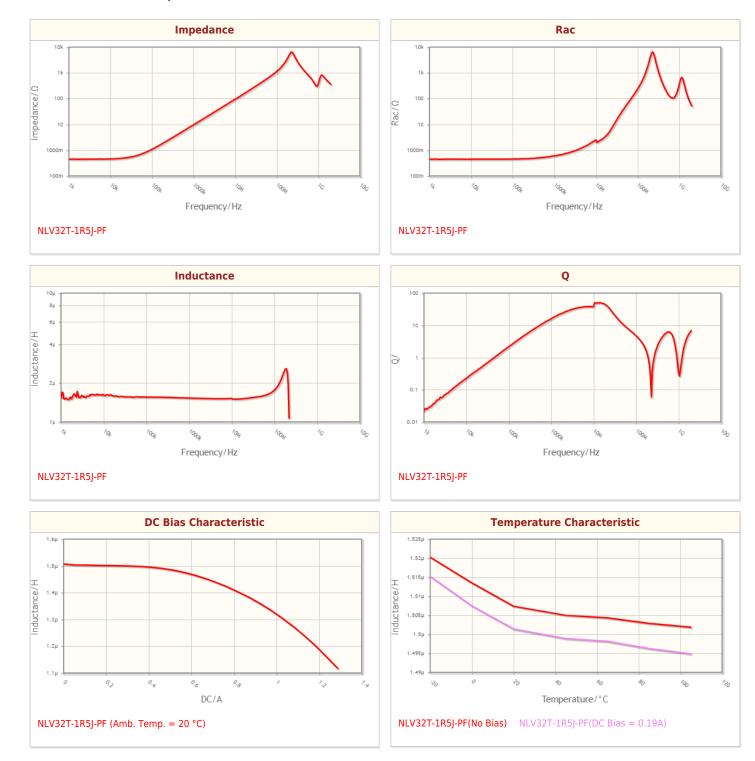


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free

Associated Images

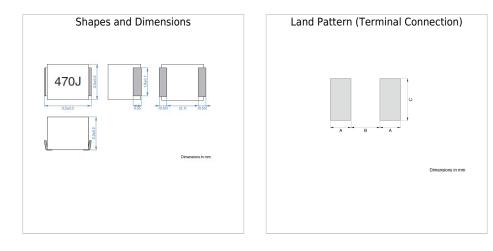

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.