


Product Name 3-terminal Filters Array
Series MEA Series
Type 1608PE Type
Part Number MEA1608PE540TA0G

Product Lifecycle Stage PROD

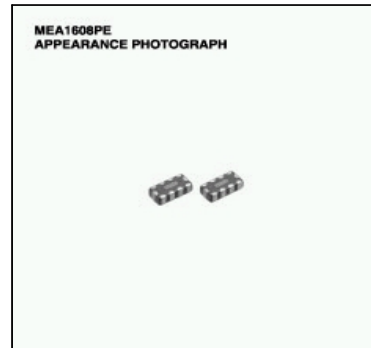

Specification

Mounting Method Flag	Yes		
Processing	multilayer type		
Shape	Chip-Array		
Circuit Type	Pi Type		
Number of Circuits	Nom	4	
Size Code	1608		
Body Length(L)	Nom	1.6 mm	
Body Breadth(W)	Nom	0.8 mm	
Body Height(T)	Nom	0.5 mm	
Cut-Off Frequency	Nom	200 MHz	
Rated Capacitance	Nom	54 pF	
Rated Voltage	Max	6.3 V	
Rated Current	Max	0.1 A	
Polarity Marking	No		
Soldering Method	Reflow,Iron Soldering		
Operating Temperature Range	Min	-40 Cel	
	Max	85 Cel	
Storage Temperature Rang	Min	-40 Cel	
	Max	85 Cel	
Weight	Nom	0.003 g	

Summary/Applications/Features

Summary	Pi-type 4line array EMC-3-terminal filters with magnetic shield and sharp attenuation characteristics.
Applications	For LCD and camera signal lines in mobile phone.
Features	4-line LC filter are built in a one chip for high density circuit design. 0.5mm low profile.
	For improvement of the mobile phone frame(l error rate. This product is suitable for the LCD signal line in mobile phone.

Packaging

Packing	Blister (Plastic)Taping [180m Reel]		
Minimum Package Qty	Nom	400	Pcs
Minimum Order Qty	Nom	400	Pcs

[Details](#)

[Catalog Info.](#)

[Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

[Notice of Revision and Improve]

All specifications are subject to change without notice.