

ATC 180 R Series NPO Porcelain Ultra-Low ESR Multilayer Capacitors

- Case R Size (.070" x .105")
- High Q
- ATC's Lowest ESR
- ATC's Lowest Noise
- Capacitance Range 0.5 pF to 100 pF
- High Self-Resonance
- 500 WVDC
- High Reliability

ATC, the industry leader, is announcing new improved ESR/ESL performance for the 180 R Series RF/Microwave Capacitors. This is ATC's lowest ESR multilayer capacitor. The high Q, high self-resonance characteristic supports many RF/Microwave applications.

Self-encapsulating porcelain construction provides a rugged, hermetic package without the need or liability of external encapsulants.

Typical functional applications: Bypass, Coupling, Tuning, Feedback, Impedance Matching and D.C. Blocking.

Typical circuit applications: RF Power Amplifiers, Filters, Oscillators, Timing Circuits and Delay Lines.

ENVIRONMENTAL TESTS

ATC 180 R Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-C-55681 and MIL-C-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:


MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.

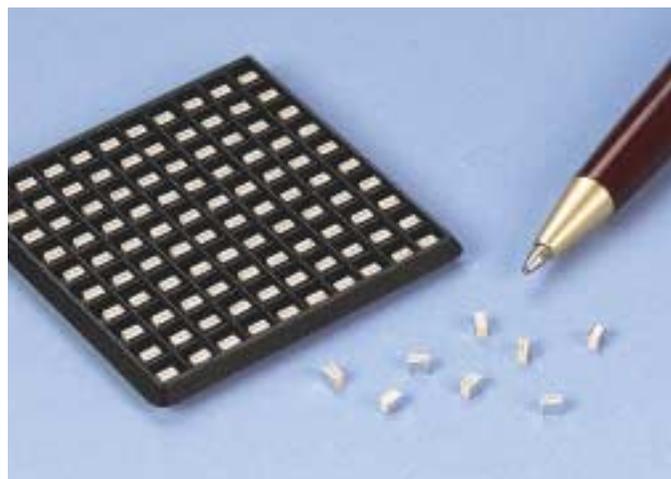

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): greater than 10,000 at 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C).

0 ±60 PPM/°C (+125°C to +175°C).

INSULATION RESISTANCE (IR):

0.5 pF to 100 pF:

10⁶ Megohms min. @ +25°C at rated WVDC.

10⁵ Megohms min. @ +125°C at rated WVDC.

10⁴ Megohms min. above +125°C.

WORKING VOLTAGE (WVDC): 500 WVDC.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case R: 250% of rated WVDC for 5 secs.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS:

None
(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:


From -55°C to +175°C (No derating of working voltage).

TERMINATION STYLES:

Termination code W (nickel barrier, solder plated).

See Mechanical Configuration, page 2.

TERMINAL STRENGTH: Terminations for chips withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor.



american technical ceramics
one norden lane, huntington station, n.y. 11746-2142 usa


phone: 631-622-4700 • fax: 631-622-4748 • e-mail: sales@atceramic ATC # 001-810 Rev. E
<http://www.atceramics.com> 12/00; 1 of 8

ATC 180 R Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R5	0.5	C, D	500	3R0	3.0	C, D	500	200	20	J, K, M	500
0R6	0.6			3R3	3.3			220	22		
0R7	0.7			3R6	3.6			240	24		
0R8	0.8			3R9	3.9			270	27		
0R9	0.9			4R3	4.3			300	30		
1R0	1.0			4R7	4.7			330	33		
1R1	1.1			5R1	5.1			360	36		
1R2	1.2			5R6	5.6			390	39		
1R3	1.3			6R2	6.2			430	43		
1R4	1.4			6R8	6.8			470	47		
1R5	1.5			7R5	7.5			510	51		
1R6	1.6			8R2	8.2			560	56		
1R7	1.7			9R1	9.1			620	62		
1R8	1.8			100	10			680	68		
1R9	1.9			110	11			750	75		
2R0	2.0			120	12			820	82		
2R1	2.1			130	13			910	91		
2R2	2.2			150	15			101	100		
2R4	2.4	160	16								
2R7	2.7	180	18								


$VRMS = 0.707 \times WVDC$

Mechanical Configuration

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
180R	W	R  Solder Plate		.070 ± .015 (1.78 ± 0.38)	.105 ± .010 (2.67 ± 0.25)	.090 (2.29) max.	.010 +.010 - .005 (0.25 +0.25 - 0.13)	SOLDER PLATE Nickel barrier, solder plated. Rugged, high performance termination for lower cost, high volume applications.

All 180 R Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

ATC PART NUMBER CODE

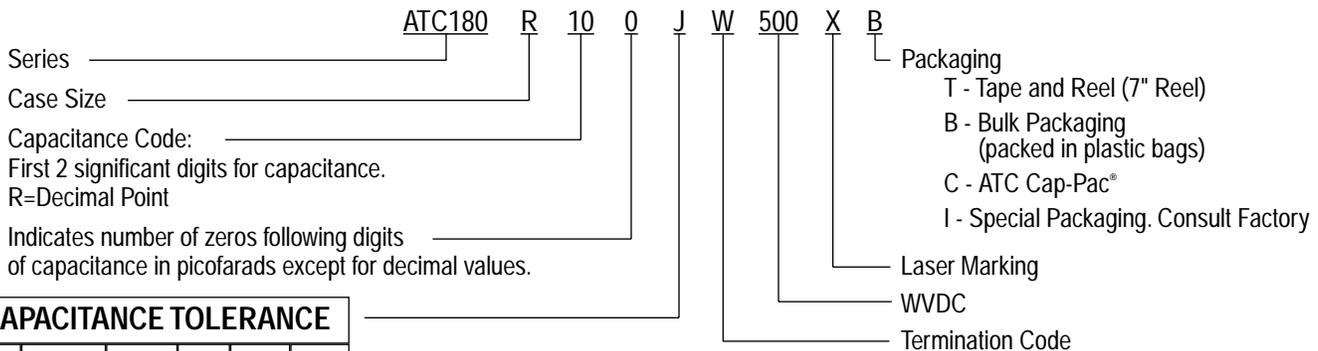

CAPACITANCE TOLERANCE					
Code	C	D	J	K	M
Tol.	±0.25 pF	±0.5 pF	±5%	±10%	±20%

The above part number refers to a 180 R Series (case size R) 10 pF capacitor, J tolerance (±5%), 500 WVDC, with W termination (solder plate), laser marking and bulk packaging.


ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.


Consult factory for additional performance data.

ATC 180 R Performance Data



ESR VS CAPACITANCE
ATC SERIES 180, CASE R

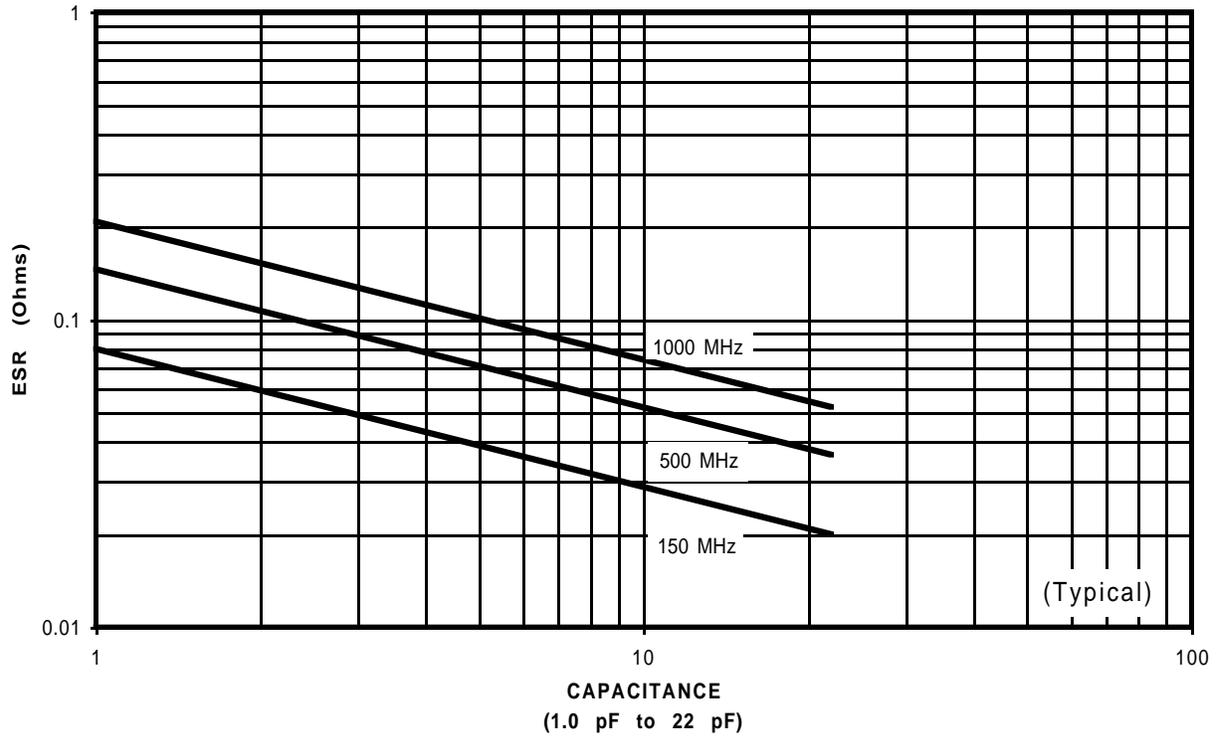

Q VS CAPACITANCE
ATC SERIES 180, CASE R

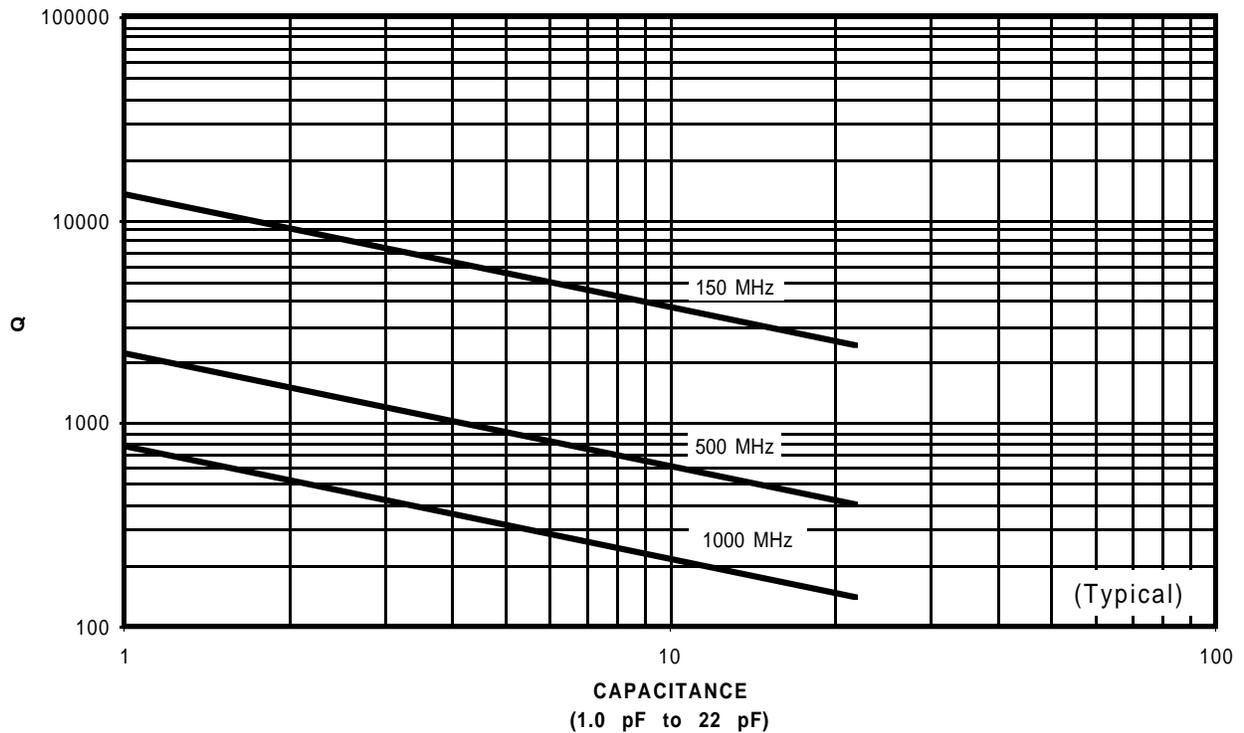


ATC 180 R Performance Data

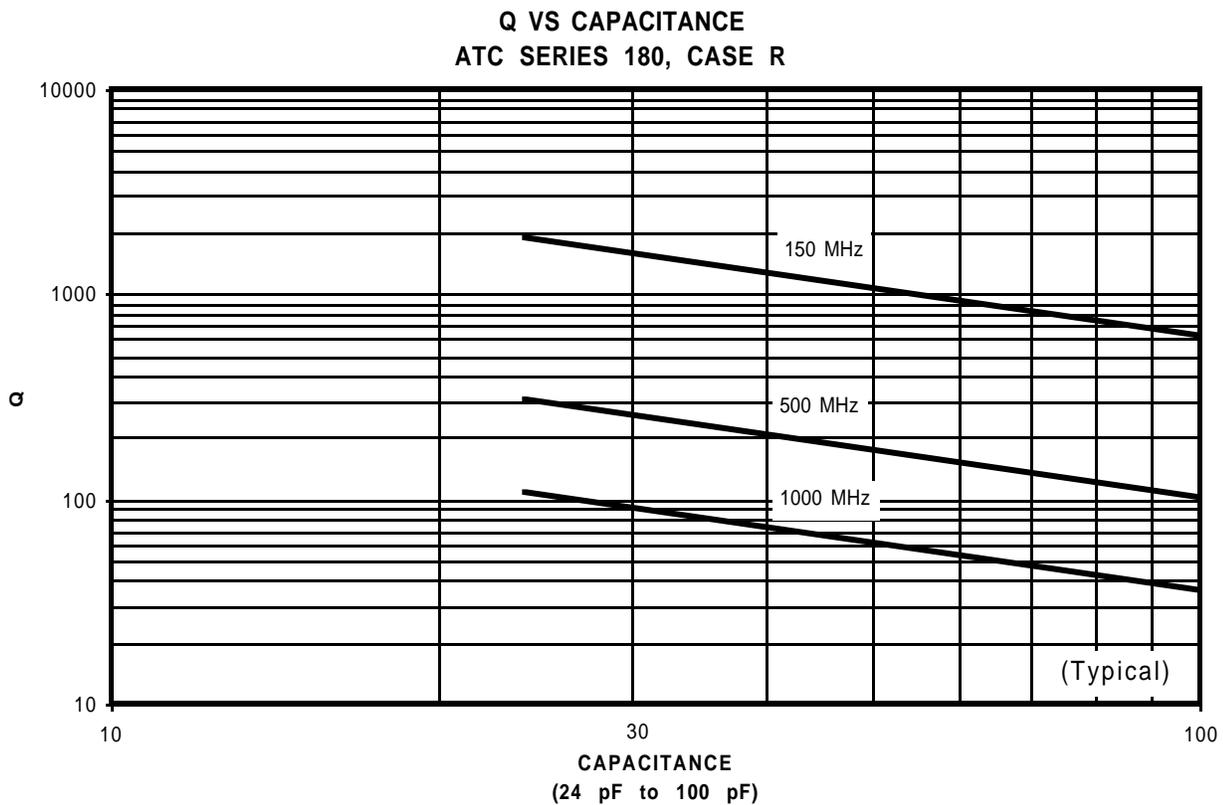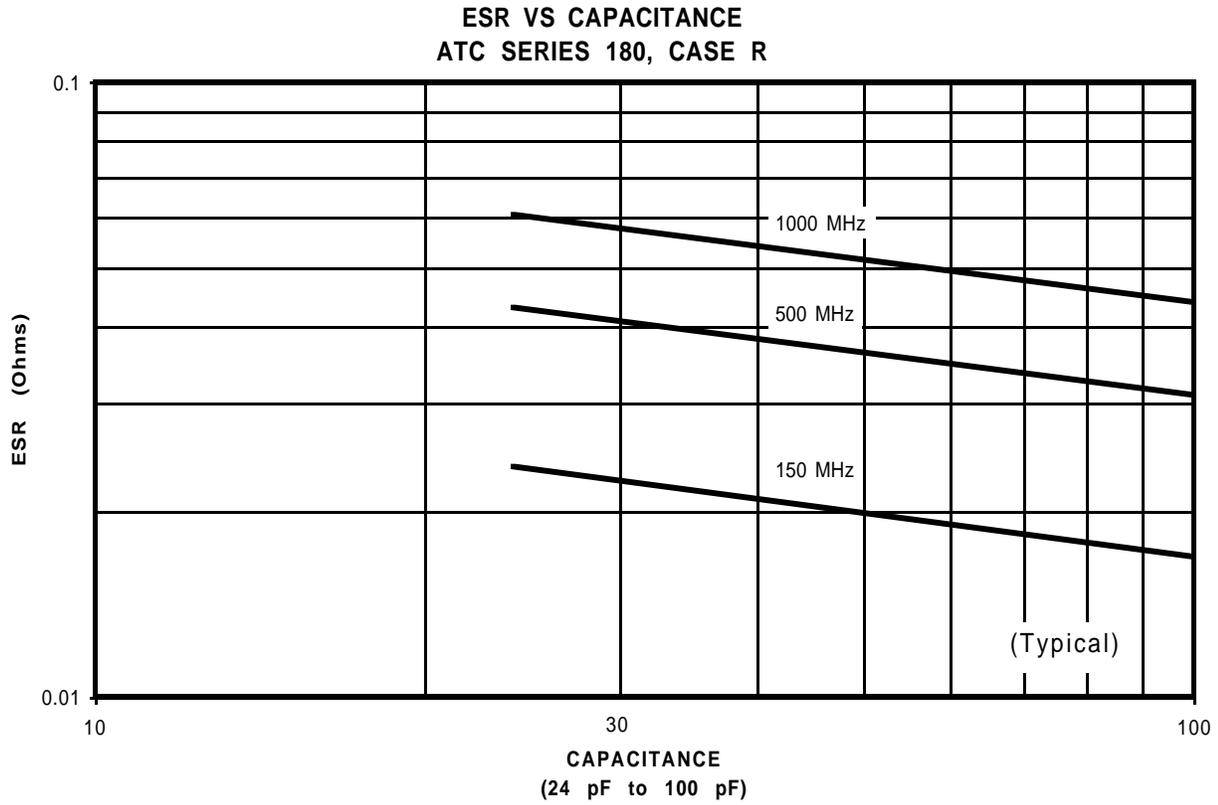


ATC 180 R Performance Data

SERIES RESONANCE VS CAPACITANCE
SERIES 180, CASE R

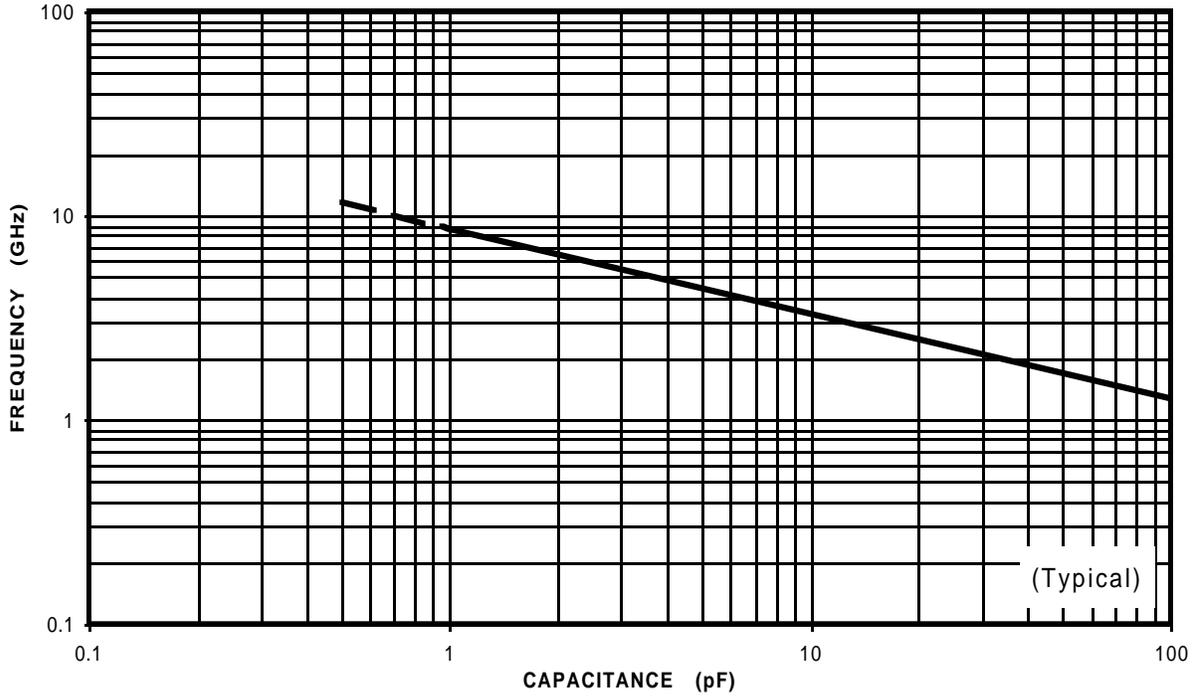


CURRENT RATING VS CAPACITANCE
ATC SERIES 180, CASE R

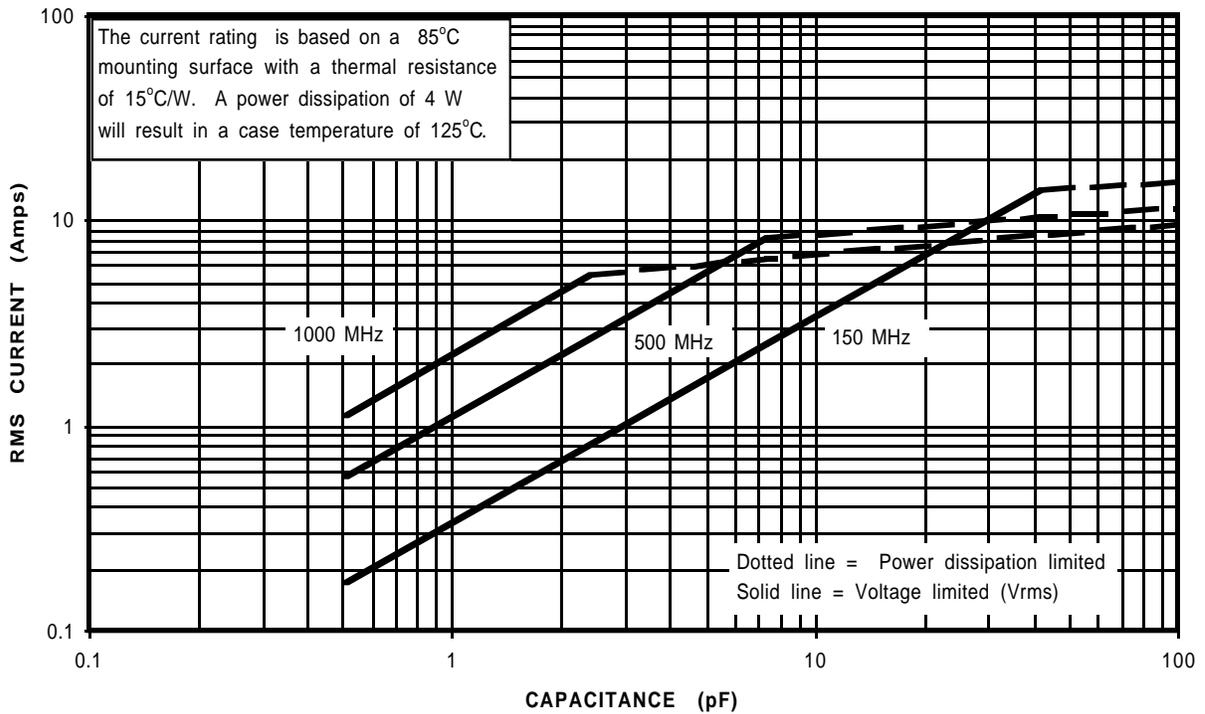


ATC 180 R Performance Data

CAPACITANCE CHANGE VS TEMPERATURE ATC SERIES 180, CASE R

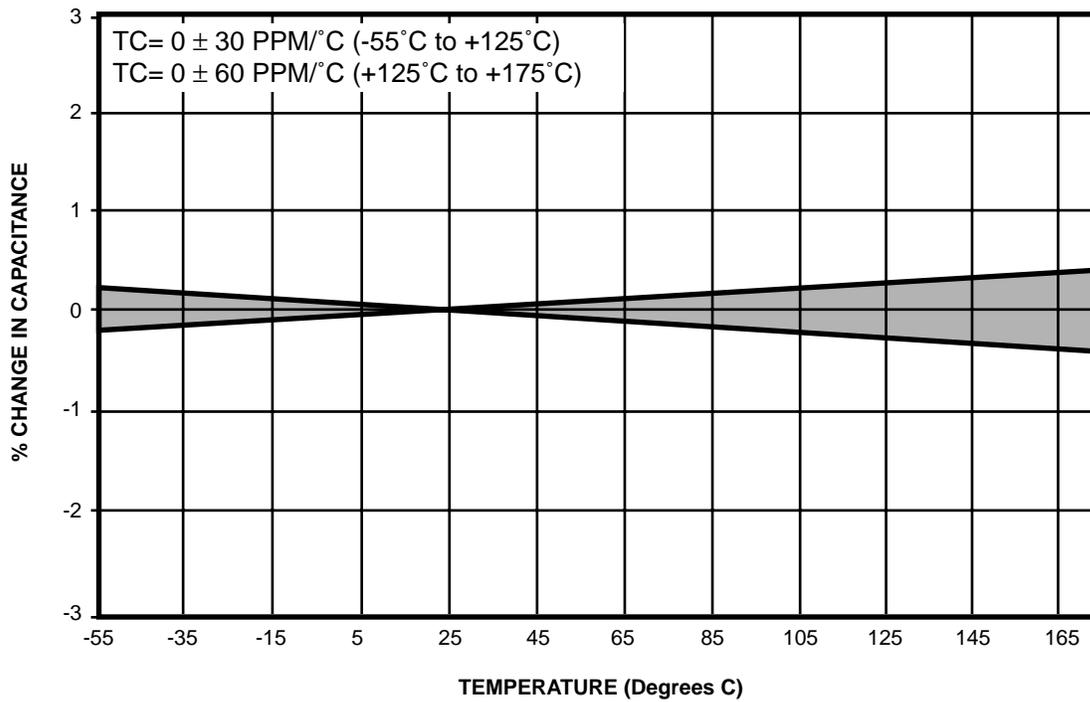

Notes

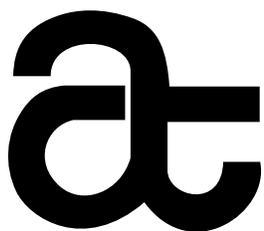

american technical ceramics
one norden lane, huntington station, n.y. 11746-2142 usa
phone: 631-622-4700 • fax: 631-622-4748 • e-mail: sales@atceramics.com
<http://www.atceramics.com>

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 1996 American Technical Ceramics Corp.

ATC # 001-810 Rev. E 12/00; 8 of 8