

Applications	Commercial Grade
Feature	Multilayer Multilayer Non-Mag Core Non-Magnetic Core (Dielectric Ceramic) Super High Q Super High Q
Series Type	MHQ-P
Status	Obsolete Recommended Alternate Part No. : MHQ0402PSA3N5BT000 (Interchangeability is not guaranteed.) Discontinue Issue Date : Nov.29, 2019 Last Purchase Order Date : Dec.31, 2020 Last Shipment Date : Mar.31, 2021
Brand	TDK







Size	
Length(L)	0.44mm ±0.02mm
Width(W)	0.24mm ±0.02mm
Thickness Height	0.24mm ±0.02mm
Recommended Land Pattern (A)	0.15mm to 0.20mm
Recommended Land Pattern (B)	0.20mm Nom.
Recommended Land Pattern (C)	0.18mm to 0.20mm

Electrical Characteristics	
Inductance	3.5nH ±0.1nH at 500MHz
Rated Current	200mA
DC Resistance [Typ.]	260mΩ
DC Resistance [Max.]	500mΩ
Self Resonant Frequency [Min.]	5GHz
Self Resonant Frequency [Typ.]	7.2GHz
Q [Min.]	10 at 500MHz
Q [Typ.]	15 at 500MHz

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Reflow
AEC-Q200	NO
Packing	Punched (Paper)Taping [180mm Reel, Tape width 8mm]
Package Quantity	20000pcs
Weight	0.00011g


! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

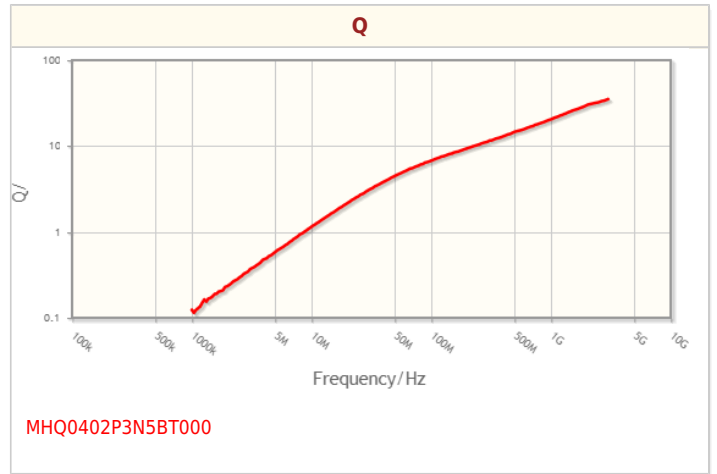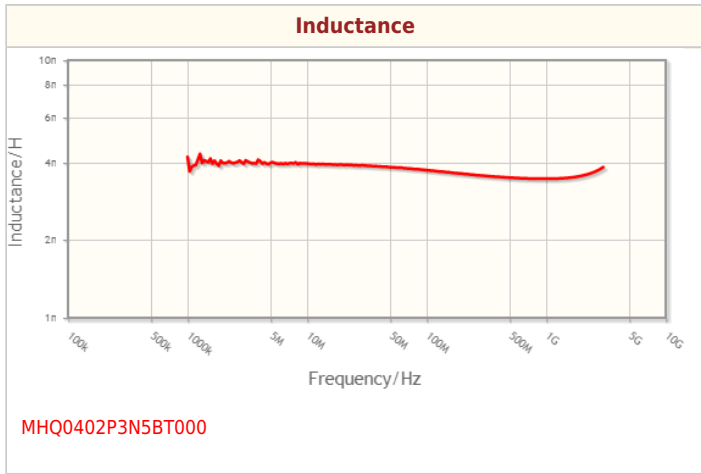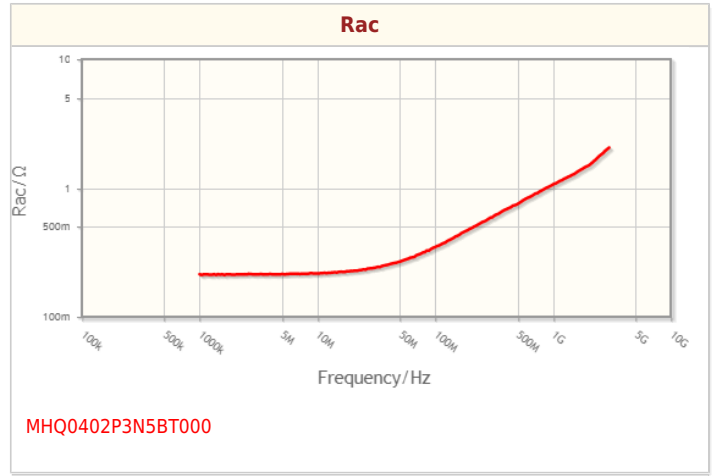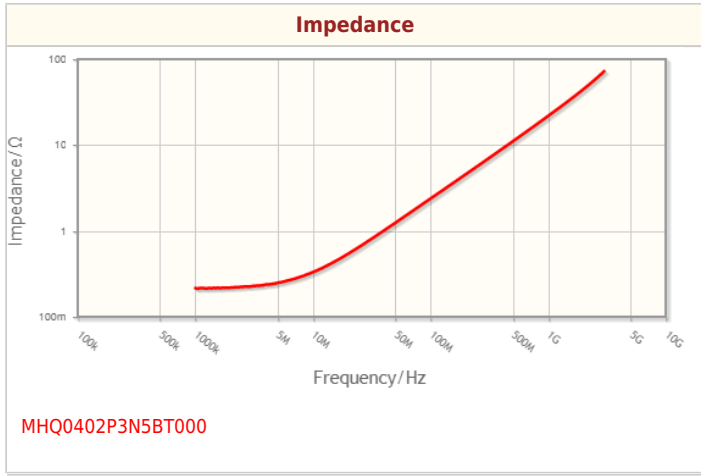

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

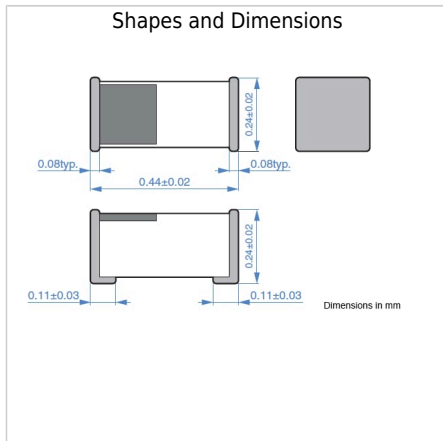

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

Downloaded from Arrow.com