&TDK SMD / SMT Inductors (Coils) SLF12575T-101M1R9-H

Applications	Automotive Grade	
Feature	AEC-Q200 Wire Wound Wire Wound Shield Magnetic Shield Ferrite Core	653
Series Type	SLF-H	
Status	Production	
Brand	TDK	


Size		
Length(L)	12.50mm ±0.30mm	
Width(W)	12.50mm ±0.30mm	
Thickness Height	7.50mm ±0.35mm	
Recommended Land Pattern (A)	2.60mm Nom.	
Recommended Land Pattern (B)	8.50mm Nom.	
Recommended Land Pattern (C)	3.20mm Nom.	

Electrical Characteristics			
Inductance	100µH ±20% at 1kHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	1.9A (10% Down)		
Rated Current (Temperature Rise) [Typ.]	1.9A (40°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	125mΩ		
DC Resistance [Max.]	150mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 125°C		
Coldening Mathed	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	YES		
Packing	Embossed (Plastic)Taping [330mm Reel, Tape width 24mm]		
Package Quantity	500pcs		
Weight	3.5g		

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

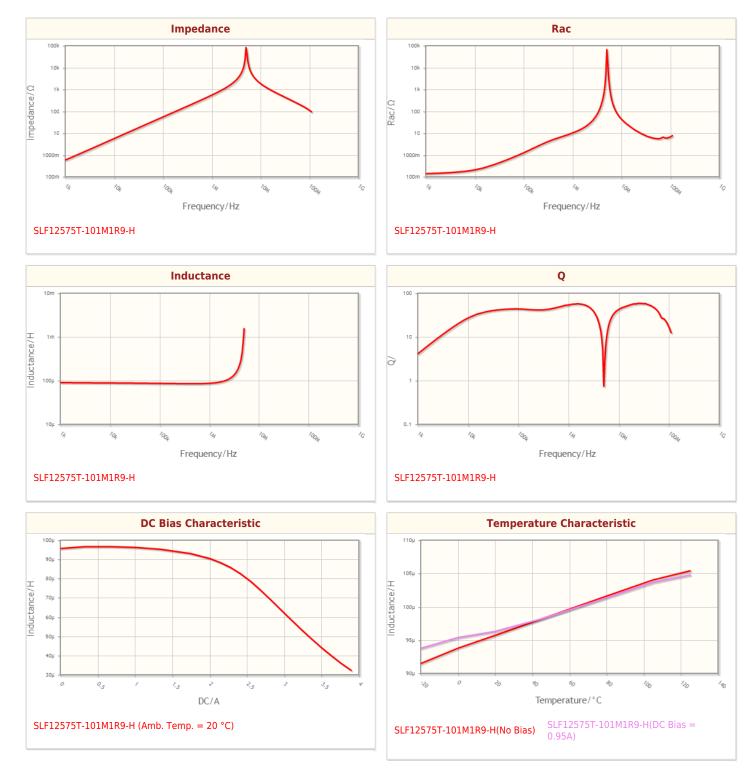

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

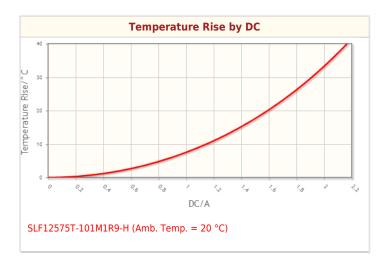

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

Associated Images

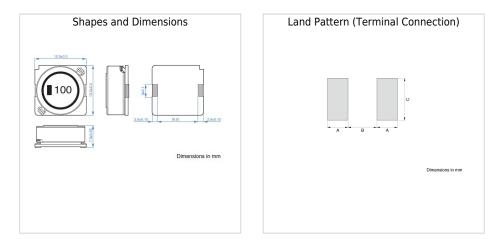

 $!\ \mbox{Images}$ are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.