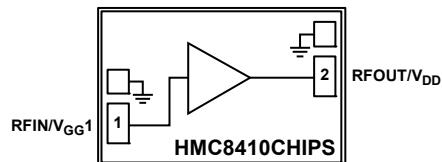


Data Sheet**HMC8410CHIPS****FEATURES****Low noise figure: 1.1 dB typical****High gain: 19.5 dB typical****High output third order intercept (IP3): 33 dBm typical****Die size: 0.945 mm × 0.61 × 0.102 mm****APPLICATIONS****Software defined radios****Electronic warfare****Radar applications****GENERAL DESCRIPTION**

The **HMC8410CHIPS** is a gallium arsenide (GaAs), monolithic microwave integrated circuit (MMIC), pseudomorphic high electron mobility transistor (pHEMT), low noise, wideband amplifier that operates over a 0.01 GHz to 10 GHz frequency range. The **HMC8410CHIPS** provides a typical gain of 19.5 dB, a 1.1 dB typical noise figure, and a typical output IP3 of 33 dBm, requiring only 65 mA from a 5 V supply voltage. The saturated

FUNCTIONAL BLOCK DIAGRAM*Figure 1.*

output power (P_{SAT}) of 22.5 dBm enables the low noise amplifier (LNA) to function as a local oscillator (LO) driver for many of Analog Devices, Inc., balanced, I/Q or image rejection mixers.

The **HMC8410CHIPS** also features inputs/outputs internally matched to $50\ \Omega$, making the device ideal for surface mounted technology (SMT)-based, high capacity microwave radio applications.

Rev. C

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 ©2016–2020 Analog Devices, Inc. All rights reserved.
[Technical Support](#) [www.analog.com](#)

TABLE OF CONTENTS

Features	1	Pin Configuration and Function Descriptions	6
Applications	1	Interface Schematics	6
Functional Block Diagram	1	Typical Performance Characteristics	7
General Description	1	Theory of Operation	13
Revision History	2	Applications Information	14
Specifications	3	Recommended Bias Sequencing	14
0.01 GHz to 3 GHz Frequency Range	3	Mounting and Bonding Techniques for Millimeterwave GaAs MMICs.....	14
3 GHz to 8 GHz Frequency Range.....	3	Application Circuit	16
8 GHz to 10 GHz Frequency Range	4	Assembly Diagram.....	16
Absolute Maximum Ratings	5	Outline Dimensions.....	17
Thermal Resistance	5	Ordering Guide	17
ESD Caution.....	5		

REVISION HISTORY

3/2020—Rev. B to Rev. C

Changes to Features Section	1
Changes to Table 4 and Table 5.....	5
Changes to Theory of Operation Section and Figure 37	13
Updated Outline Dimensions.....	17

11/2018—Rev. A to Rev. B

Updated Outline Dimensions.....	17
---------------------------------	----

1/2018—Rev. 0 to Rev. A

Added Output Second Order Intercept Parameter, Table 1 and Output Second Order Intercept Parameter, Table 2	3
Change to Noise Figure Parameter Test Conditions, Table 1	3
Added Output Second Order Parameter, Table 3	4
Changes to Table 6	6
Change to Figure 33.....	11
Moved Figure 35.....	12
Added Figure 36; Renumbered Sequentially.....	12

10/2016—Revision 0: Initial Version

SPECIFICATIONS

0.01 GHz TO 3 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$, $V_{DD} = 5 \text{ V}$, and $I_{DQ} = 65 \text{ mA}$, unless otherwise noted.

Table 1.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE		0.01	3		GHz	
GAIN		17.5	19.5		dB	
Gain Variation Over Temperature		0.01			dB/ $^\circ\text{C}$	
NOISE FIGURE		1.1	1.6		dB	0.3 GHz to 3 GHz
RETURN LOSS						
Input		15			dB	
Output		24			dB	
OUTPUT						
Output Power for 1 dB Compression	$P_{1\text{dB}}$	19.0	21.0		dBm	
Saturated Output Power	P_{SAT}		22.5		dBm	
Output Third Order Intercept	IP3		33		dBm	
Output Second Order Intercept	IP2		37		dBm	
SUPPLY						
Current	I_{DQ}	65	80		mA	
Voltage	V_{DD}	2	5	6	V	Adjust V_{GG1} to achieve $I_{DQ} = 65 \text{ mA}$ typical

3 GHz TO 8 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$, $V_{DD} = 5 \text{ V}$, and $I_{DQ} = 65 \text{ mA}$, unless otherwise noted.

Table 2.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE		3	8		GHz	
GAIN		15.5	18		dB	
Gain Variation Over Temperature		0.01			dB/ $^\circ\text{C}$	
NOISE FIGURE		1.4	1.9		dB	
RETURN LOSS						
Input		12			dB	
Output		12			dB	
OUTPUT						
Output Power for 1 dB Compression	$P_{1\text{dB}}$	17.5	20.5		dBm	
Saturated Output Power	P_{SAT}		22.5		dBm	
Output Third Order Intercept	IP3		31.5		dBm	
Output Second Order Intercept	IP2		33		dBm	
SUPPLY						
Current	I_{DQ}	65	80		mA	
Voltage	V_{DD}	2	5	6	V	Adjust V_{GG1} to achieve $I_{DQ} = 65 \text{ mA}$ typical

8 GHz TO 10 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$, $V_{DD} = 5 \text{ V}$, and $I_{DQ} = 65 \text{ mA}$, unless otherwise noted.

Table 3.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
FREQUENCY RANGE		8		10	GHz	
GAIN Gain Variation Over Temperature		13 0.01	16		dB dB/ $^\circ\text{C}$	
NOISE FIGURE			1.7	2.2	dB	
RETURN LOSS						
Input			6		dB	
Output			10		dB	
OUTPUT						
Output Power for 1 dB Compression	P _{1dB}	17.5	19.5		dBm	
Saturated Output Power	P _{SAT}		21.5		dBm	
Output Third Order Intercept	IP3		33		dBm	
Output Second Order Intercept	IP2		33		dBm	
SUPPLY						
Current	I _{DQ}		65	80	mA	
Voltage	V _{DD}	2	5	6	V	Adjust V_{GG1} to achieve $I_{DQ} = 65 \text{ mA}$ typical

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter ¹	Rating
Drain Bias Voltage (V_{DD})	7 V dc
Radio Frequency (RF) Input Power (RFIN)	20 dBm
Continuous Power Dissipation (P_{DISS}), $T = 85^\circ\text{C}$ (Derate 8.0 mW/ $^\circ\text{C}$ Above 85°C)	0.72 W
Channel Temperature	175°C
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Operating Temperature Range	-55°C to $+85^\circ\text{C}$
ESD Sensitivity	
Human Body Model (HBM)	Class 1B passed 500 V

¹ When referring to a single function of a multifunction pin in the parameters, only the portion of the pin name that is relevant to the specification is listed. For the full pin names of multifunction pins, refer to the Pin Configuration and Function Descriptions section.

² See the Ordering Guide section for more information.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

θ_{JC} is the junction to case thermal resistance, and channel to bottom of die.

Table 5. Thermal Resistance

Package Type	θ_{JC}	Unit
C-2-3	125.85	$^\circ\text{C/W}$

ESD CAUTION



ESD (electrostatic discharge) sensitive device.
Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

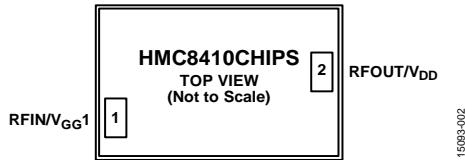


Figure 2. Pad Configuration



Table 6. Pad Function Descriptions

Pin No.	Mnemonic	Description
1	RFIN/V _{GG1}	RF Input (RFIN). This pin is dc-coupled and matched to 50 Ω. See Figure 4 for the interface schematic. Gate Bias of the Amplifier (V _{GG1}). This pin is dc-coupled and matched to 50 Ω. See Figure 4 for the interface schematic.
2	RFOUT/V _{DD}	RF Output (RFOUT). This pin is dc-coupled and matched to 50 Ω. See Figure 5 for the interface schematic. Drain Bias for Amplifier (V _{DD}). This pin is dc-coupled and matched to 50 Ω. See Figure 5 for the interface schematic.
Die Bottom	GND	Ground. Die Bottom. This pin must be connected to RF/dc ground.

INTERFACE SCHEMATICS



Figure 3. GND Interface Schematic

Figure 5. RFOUT/V_{DD} Interface SchematicFigure 4. RFIN/V_{GG1} Interface Schematic

TYPICAL PERFORMANCE CHARACTERISTICS

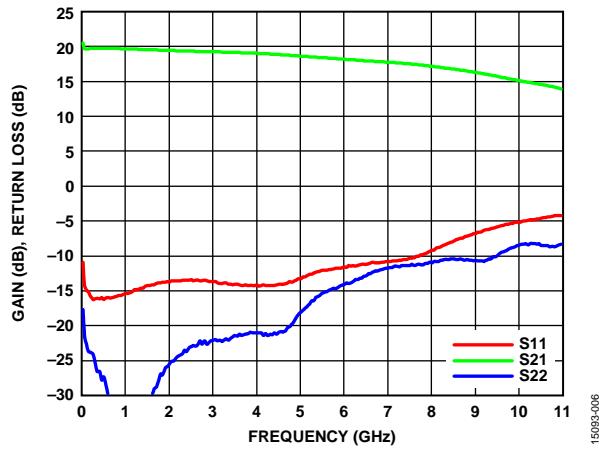


Figure 6. Gain and Return Loss vs. Frequency

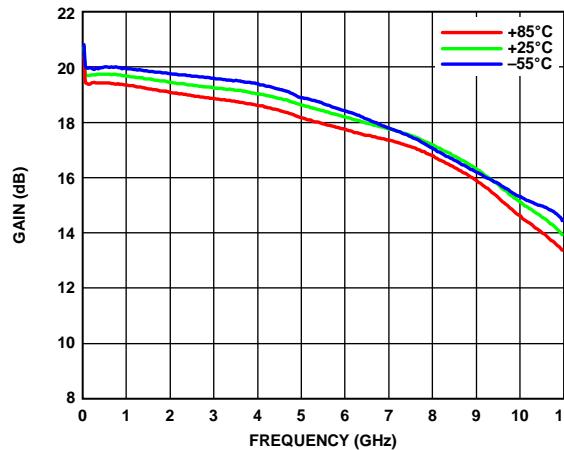


Figure 9. Gain vs. Frequency for Various Temperatures

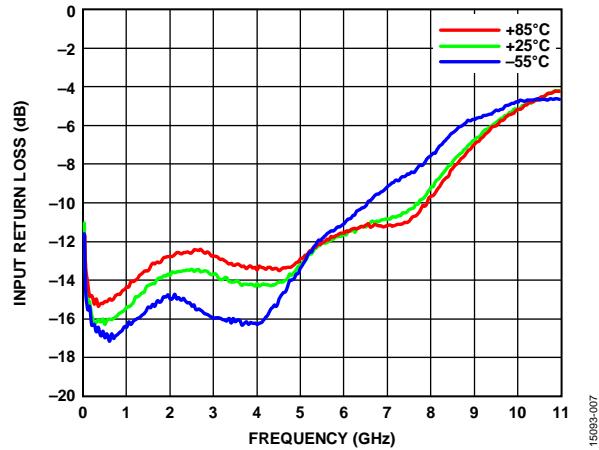


Figure 7. Input Return Loss vs. Frequency for Various Temperatures

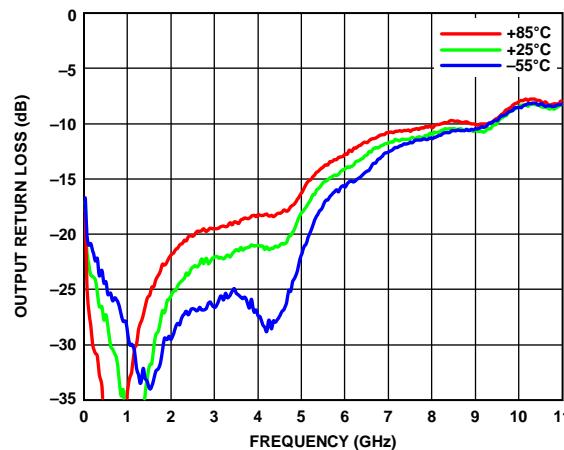


Figure 10. Output Return Loss vs. Frequency for Various Temperatures

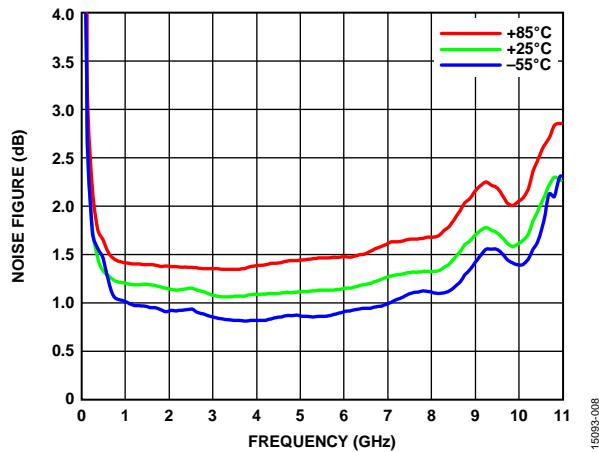


Figure 8. Noise Figure vs. Frequency for Various Temperatures

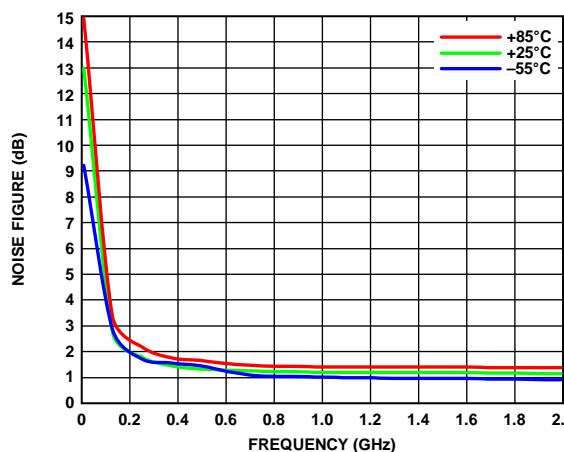
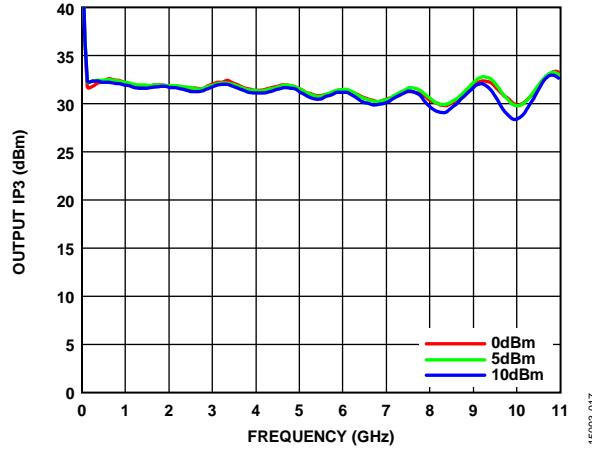
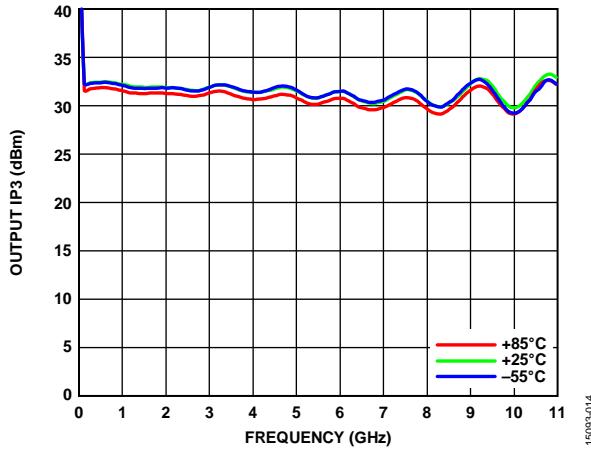
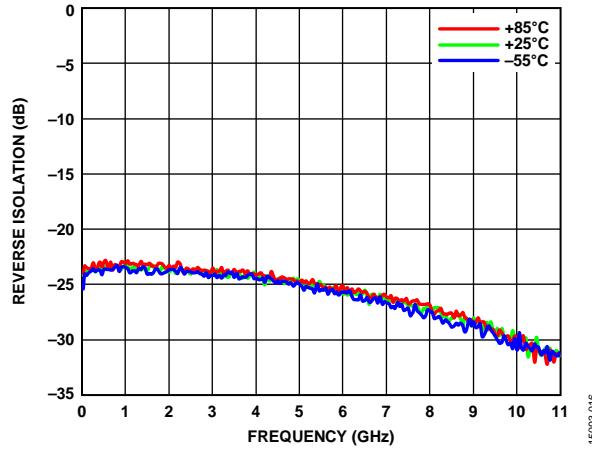
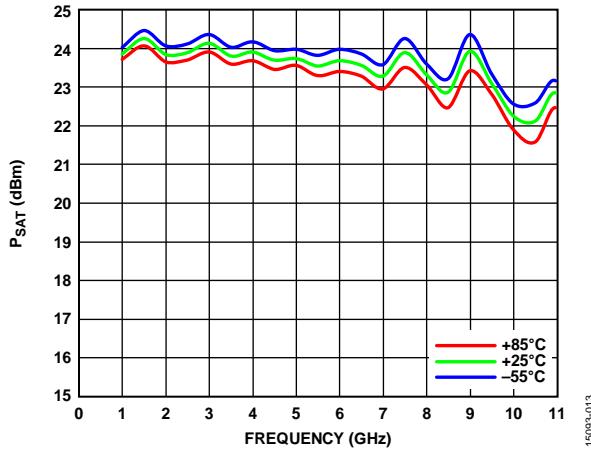
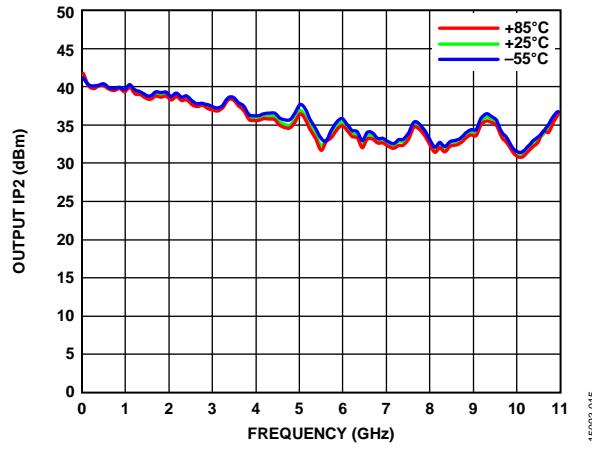
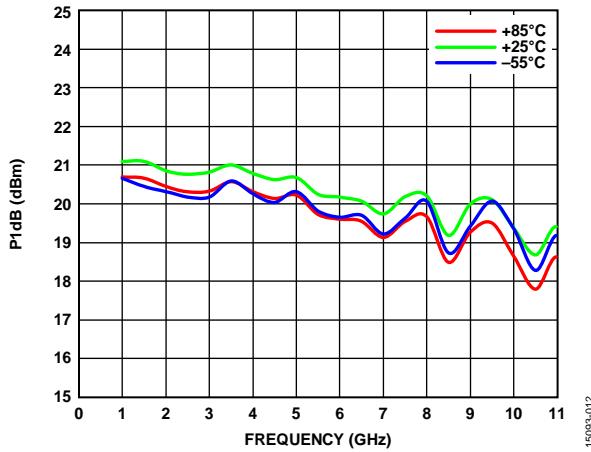
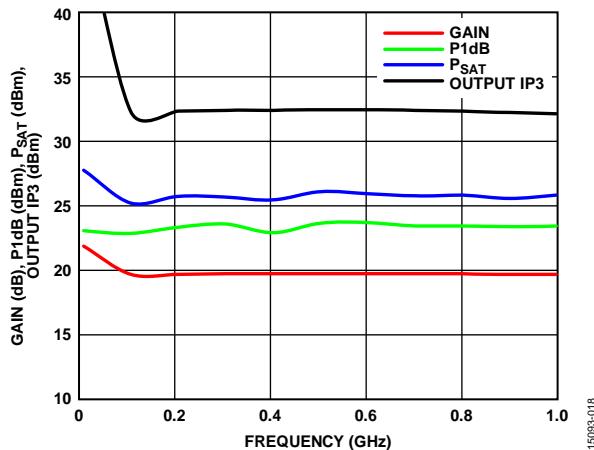
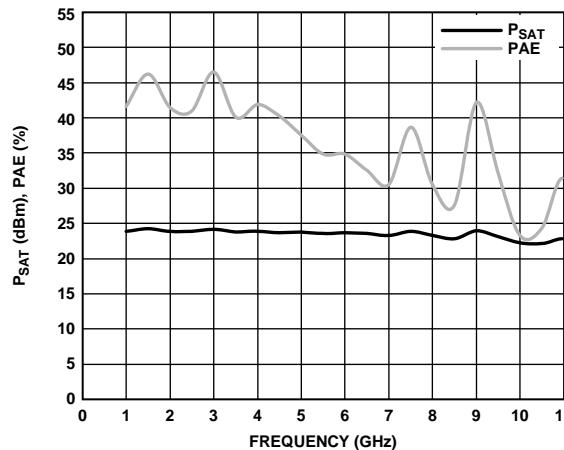
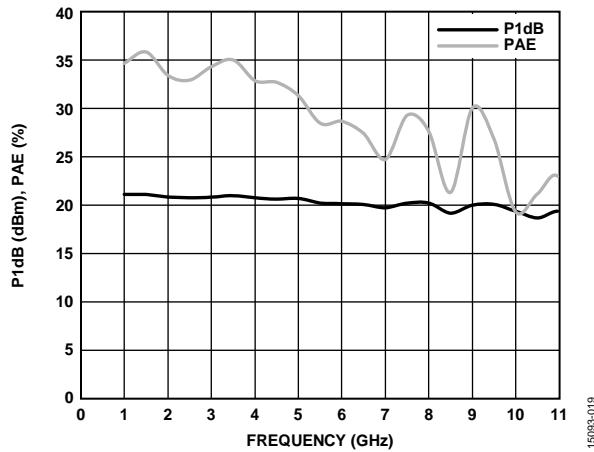
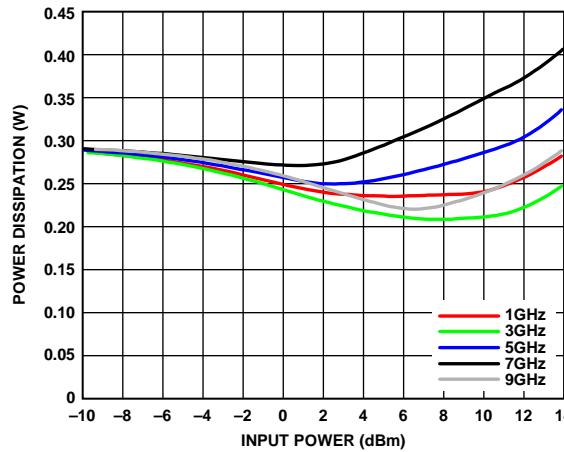
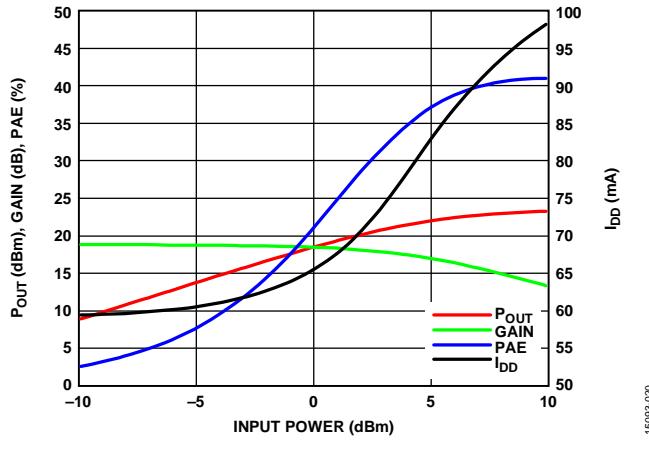
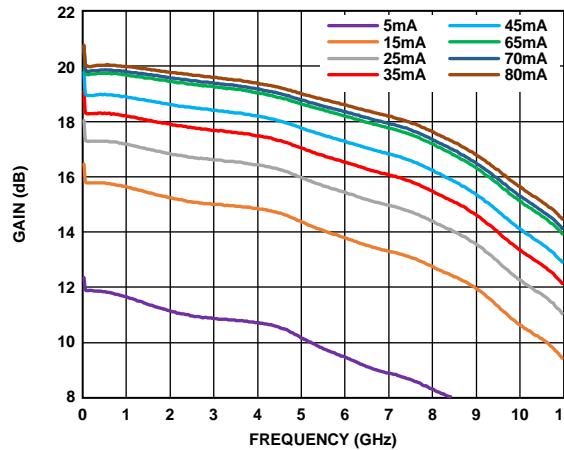


Figure 11. Noise Figure vs. Frequency for Various Temperatures, 10 MHz to 1 GHz



Figure 18. Gain, P_{1dB}, P_{SAT}, and Output IP3 vs. FrequencyFigure 21. P_{SAT} and PAE vs. FrequencyFigure 19. P_{1dB} and Power Added Efficiency (PAE) vs. FrequencyFigure 22. Power Dissipation vs. Input Power for Various Frequencies, T_A = 85°CFigure 20. P_{OUT}, Gain, PAE, and Supply Current (I_{DD}) with RF Applied (I_{DD}) vs. Input Power at 5 GHzFigure 23. Gain vs. Frequency for Various Supply Currents (I_{DD}), V_{DD} = 5 V

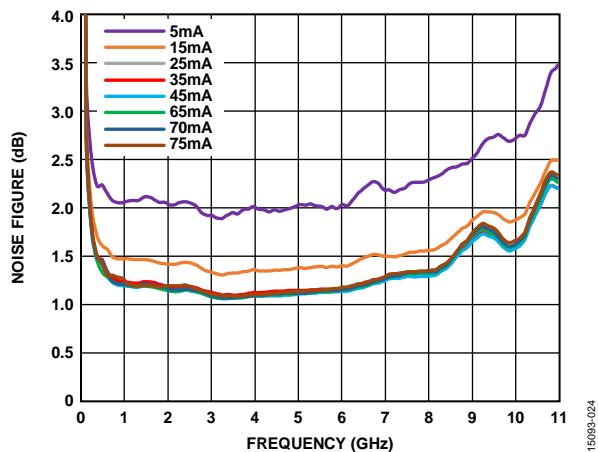


Figure 24. Noise Figure vs. Frequency for Various Supply Currents (I_{DQ}), $V_{DD} = 5 \text{ V}$

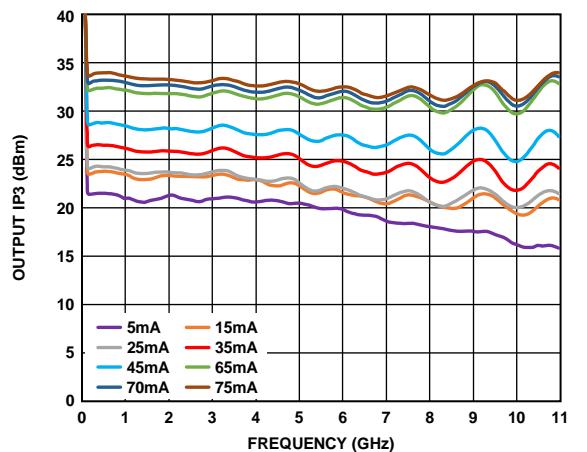


Figure 27. Output IP3 vs. Frequency for Various Supply Currents (I_{DQ}), $P_{OUT}/\text{Tone} = 5 \text{ dBm}$, $V_{DD} = 5 \text{ V}$

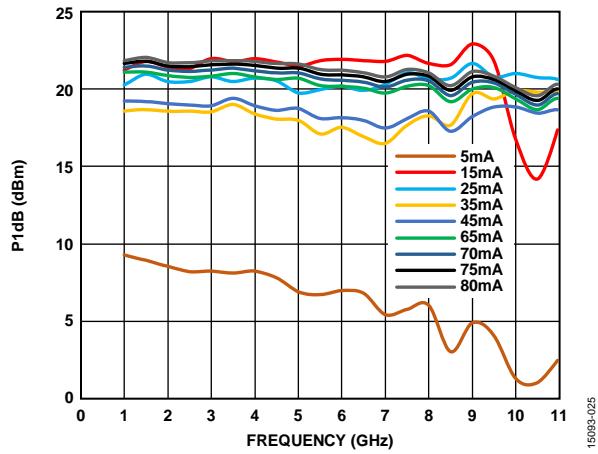


Figure 25. P1dB vs. Frequency for Various Supply Currents (I_{DQ}), $V_{DD} = 5 \text{ V}$

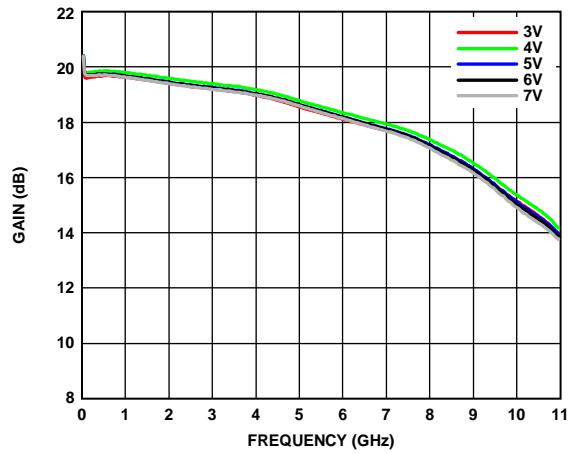


Figure 28. Gain vs. Frequency for Various Supply Voltages, $I_{DQ} = 65 \text{ mA}$

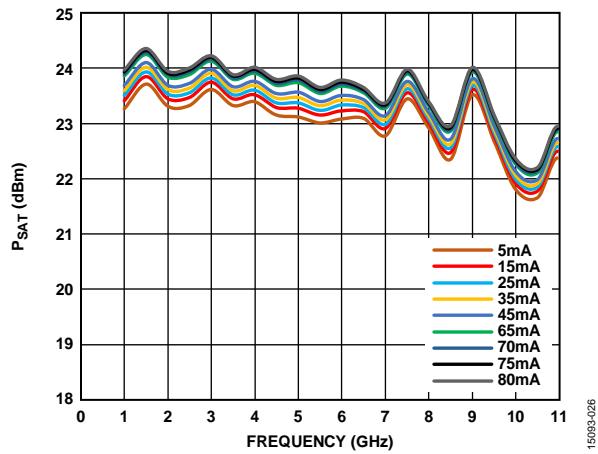


Figure 26. P_{SAT} vs. Frequency for Various Supply Currents (I_{DQ}), $V_{DD} = 5 \text{ V}$





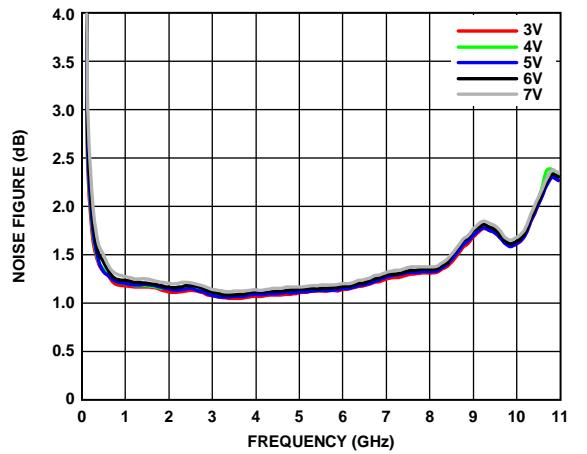


Figure 29. Noise Figure vs. Frequency for Various Supply Voltages, $I_{DQ} = 65 \text{ mA}$

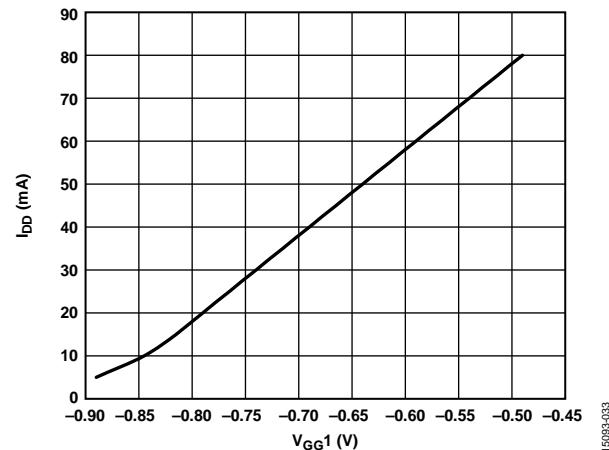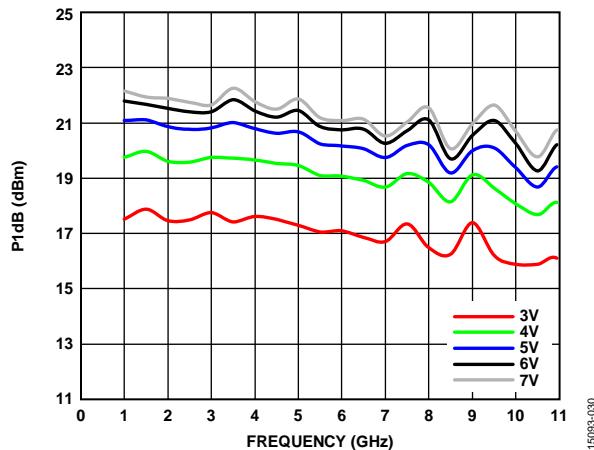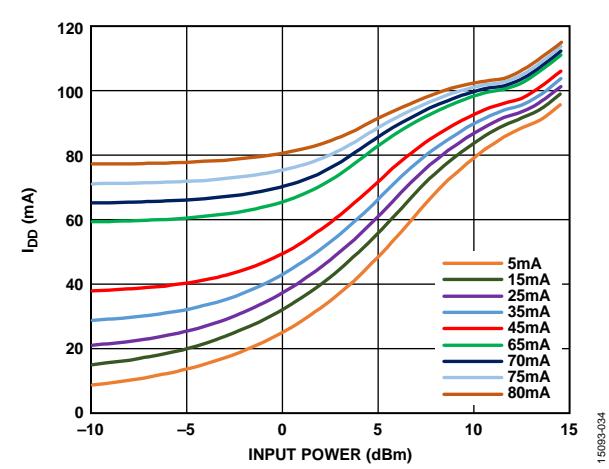




15093-030

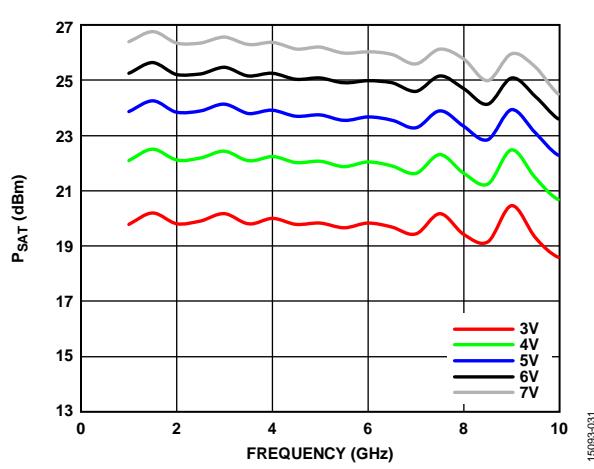

15093-033

15093-034

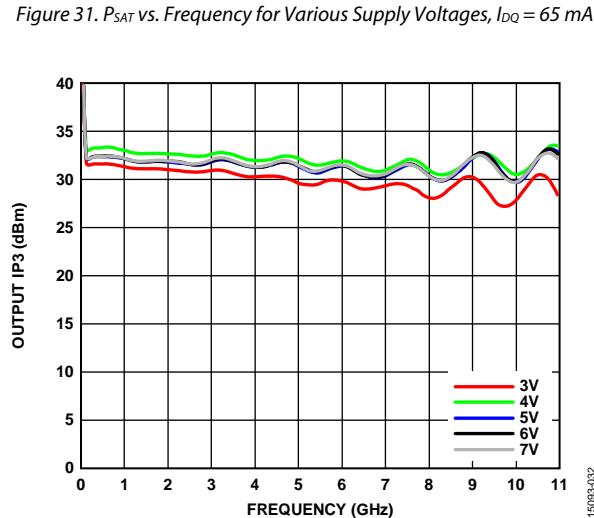

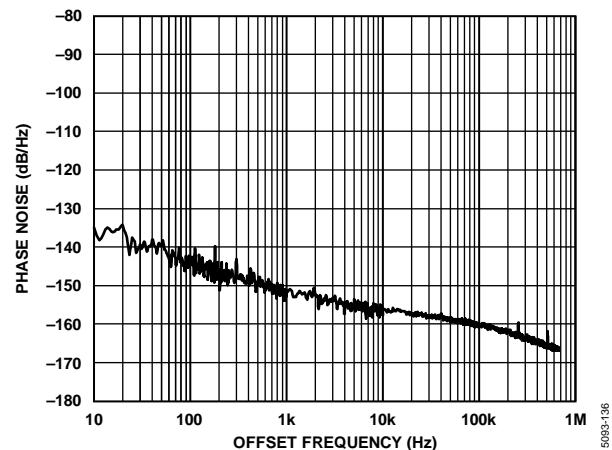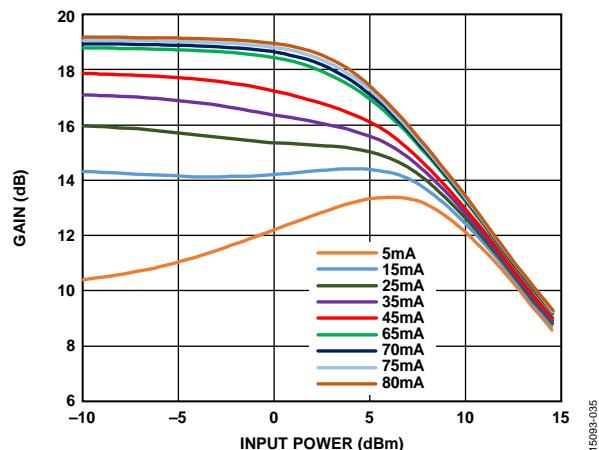

THEORY OF OPERATION

The **HMC8410CHIPS** is a GaAs, MMIC, pHEMT, low noise wideband amplifier.

The **HMC8410CHIPS** has single-ended input and output ports whose impedances are nominally equal to $50\ \Omega$ over the 0.01 GHz to 10 GHz frequency range. Consequently, it can directly insert into a $50\ \Omega$ system with no required impedance matching circuitry, which also means that multiple **HMC8410CHIPS** amplifiers can be cascaded back to back without the need for external matching circuitry.

The input and output impedances are sufficiently stable vs. variations in temperature and supply voltage so that no impedance matching compensation is required.

To achieve optimal performance from the **HMC8410CHIPS** and prevent damage to the device, do not exceed the absolute maximum ratings.




Figure 37. Simplified HMC8410CHIPS Architecture

APPLICATIONS INFORMATION

Figure 40 shows the basic connections for operating the **HMC8410CHIPS**. The data taken herein used wideband bias tees on the input and output ports to provide both ac coupling and the necessary supply voltages to the RFIN/V_{GG1} and RFOUT/V_{DD} pins. A 5 V dc drain bias is supplied to the amplifier through the choke inductor connected to the RFOUT/V_{DD} pin, and the -2 V gate bias voltage is supplied to the RFIN/V_{GG1} pin through the choke inductor. The RF signal must be ac-coupled to prevent disrupting the dc bias applied to the RFIN/V_{GG1} and RFOUT/V_{DD} pins. The nonideal characteristics of ac coupling capacitors and choke inductors (for example, self resonance) can introduce performance trade-offs that must be considered when using a single application circuit across a wide frequency range.

RECOMMENDED BIAS SEQUENCING

The recommended bias sequence during power-up is as follows:

1. Connect to GND.
2. Set RFIN/V_{GG1} to -2 V.
3. Set RFOUT/V_{DD} to 5 V.
4. Increase RFIN/V_{GG1} to achieve a typical supply current (I_{DQ}) = 65 mA.
5. Apply the RF signal.

The recommended bias sequence during power-down is as follows:

1. Turn off the RF signal.
2. Decrease RFIN/V_{GG1} to -2 V to achieve a typical I_{DQ} = 0 mA.
3. Decrease RFOUT/V_{DD} to 0 V.
4. Increase RFIN/V_{GG1} to 0 V.

The bias conditions previously listed (RFOUT/V_{DD} = 5 V and I_{DQ} = 65 mA) are the recommended operating conditions to achieve optimum performance. The data used in this data sheet was taken with the recommended bias conditions. When using the **HMC8410CHIPS** with different bias conditions, different performance than that shown in the Typical Performance Characteristics section can result.

Figure 29, Figure 30, and Figure 31 show that increasing the voltage from 3 V to 7 V typically increases P_{1dB} and P_{SAT} at the expense of power consumption with minor degradation on noise figure (NF).

MOUNTING AND BONDING TECHNIQUES FOR MILLIMETERWAVE GaAs MMICS

Attach the die directly to the ground plane eutectically or with conductive epoxy (see the Handling Precautions section).

To bring the radio frequency to and from the chip, implementing 50 Ω transmission lines using a microstrip or coplanar waveguide on 0.127 mm (5 mil) thick alumina, thin film substrates is recommended (see Figure 38). When using 0.254 mm (10 mil) thick alumina, it is recommended that the die be raised to ensure that the die and substrate surfaces are coplanar. Raise the die 0.150 mm (6 mil) to ensure that the surface of the die is coplanar with the surface of the substrate. To accomplish this, attach the 0.102 mm (4 mil) thick die to a 0.150 mm (6 mil) thick, molybdenum (Mo) heat spreader (moly tab), which can then be attached to the ground plane (see Figure 38 and Figure 39).

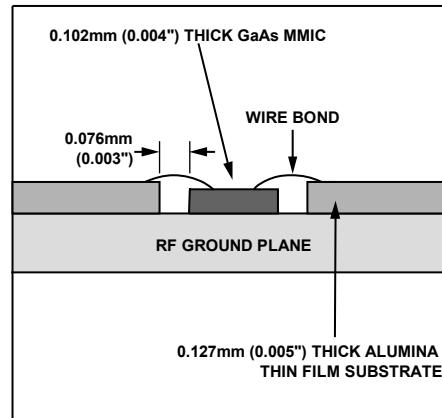


Figure 38. Die Without the Moly Tab

15093-037

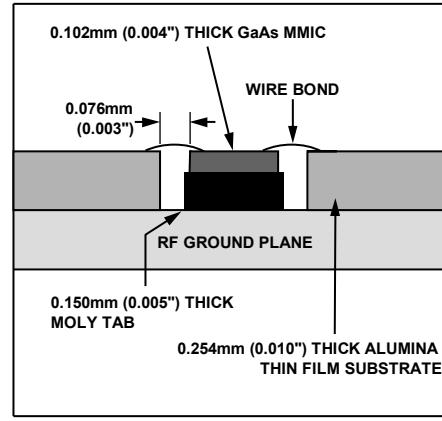


Figure 39. Die With the Moly Tab

15093-038

Place microstrip substrates as close to the die as possible to minimize bond wire length. Typical die to substrate spacing is 0.076 mm to 0.152 mm (3 mil to 6 mil).

Handling Precautions

To avoid permanent damage, follow these storage, cleanliness, static sensitivity, transient, and general handling precautions:

- Place all bare die in either waffle or gel-based ESD protective containers and then seal the die in an ESD protective bag for shipment. After the sealed ESD protective bag is opened, store all die in a dry nitrogen environment.
- Handle the chips in a clean environment. Do not attempt to clean the chip using liquid cleaning systems.
- Follow ESD precautions to protect against ESD strikes.
- While bias is applied, suppress instrument and bias supply transients. Use shielded signal and bias cables to minimize inductive pickup.
- Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip can have fragile air bridges and must not be touched with a vacuum collet, tweezers, or fingers.

APPLICATION CIRCUIT

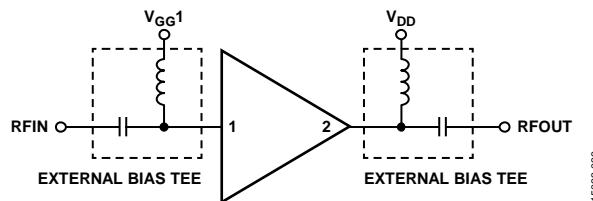


Figure 40. Application Circuit

15093-039

ASSEMBLY DIAGRAM


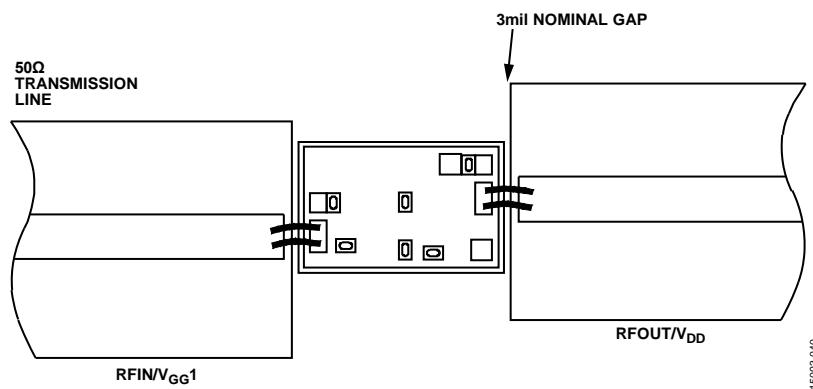


Figure 41. Assembly Diagram

15093-040

OUTLINE DIMENSIONS

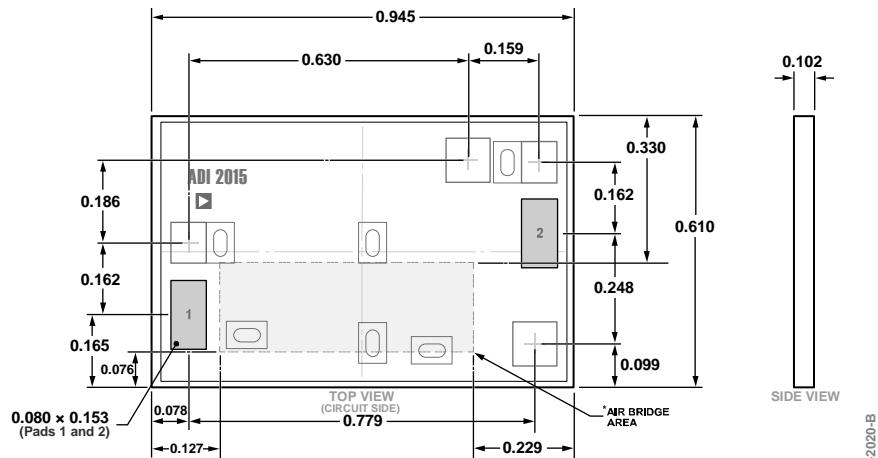

^{*}This die utilizes fragile air bridges. Any pickup tools used must not contact this area.

Figure 42. 2-Pad Bare Die [CHIP]

(C-2-3)

Dimensions shown in millimeters

02-10-2020-B

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option
HMC8410CHIPS	-55°C to +85°C	2-Pad Bare Die [CHIP]	C-2-3
HMC8410CHIPS-SX	-55°C to +85°C	2-Pad Bare Die [CHIP]	C-2-3

¹ The HMC8410CHIPS and HMC8410CHIPS-SX are RoHS Compliant Parts.