RoHS Reach

NL565050T-182J-PF

Applications	Commercial Grade		
	No Directivity No Directivity		
Feature	Wire Wound Wire Wound		
	Ferrite Core		
Series Type	NL565050		
Status	⚠ Obsolete		
	Recommended Alternate Part No. : None		
	Discontinue Issue Date : May.21, 2015		
	Last Purchase Order Date : Dec.22, 2016		
	Last Shipment Date : Jun.30, 2017		
Brand	TDK		



	Size	
Length(L)	5.60mm ±0.30mm	
Width(W)	5.00mm ±0.30mm	
Thickness Height	5.00mm ±0.30mm	
Recommended Land Pattern (A)	2.00mm Nom.	
Recommended Land Pattern (B)	4.00mm Nom.	
Recommended Land Pattern (C)	4.50mm Nom.	

Electrical Characteristics			
Inductance	1.8mH ±5% at 252kHz		
Rated Current	60mA		
DC Resistance [Typ.]			
DC Resistance [Max.]	30Ω		
Self Resonant Frequency [Min.]	1.3MHz		
Self Resonant Frequency [Typ.]			
Q [Min.]	30 at 252kHz		
Q [Typ.]			

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Package Quantity	400pcs	
Weight	0.38g	


[!] Images are for reference only and show exemplary products.


[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.





Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

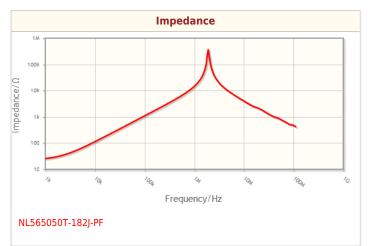


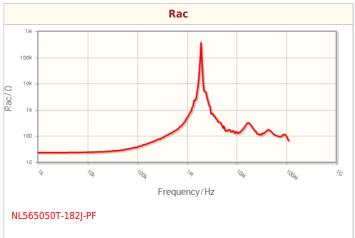

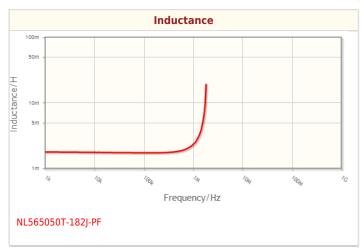

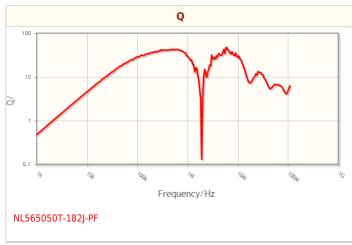

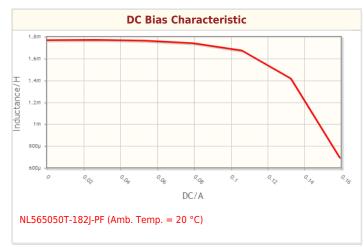

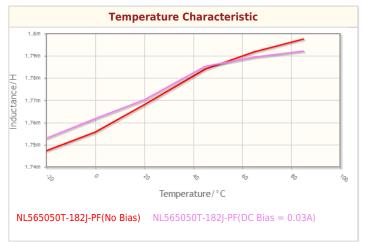


[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

565050T-182I-PF RoHS Reach

Associated Images



 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.