## SMD / SMT Inductors (Coils) SLF12565T-101M1R6-PF

Applications	Commercial Grade	_
Feature	Wire Wound Shield Magnetic Shield Ferrite Core	
Series   Type	SLF	
Status	Production	
Brand	ток	

Size			
Length(L)	12.50mm ±0.30mm		
Width(W)	12.50mm ±0.30mm		
Thickness   Height	6.50mm ±0.35mm		
Recommended Land Pattern (A)	2.60mm Nom.		
Recommended Land Pattern (B)	8.50mm Nom.		
Recommended Land Pattern (C)	3.20mm Nom.		


Electrical Characteristics			
Inductance	100µH ±20% at 1kHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	1.6A (10% Down)		
Rated Current (Temperature Rise) [Typ.]	1.9A (40°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	123mΩ		
DC Resistance [Max.]	148mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other				
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C			
Coldoring Mathed	Reflow			
Soldering Method	Iron Soldering			
AEC-Q200	NO			
Packing	Embossed (Plastic)Taping [330mm Reel]			
Package Quantity	500pcs			
Weight	3.2g			

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

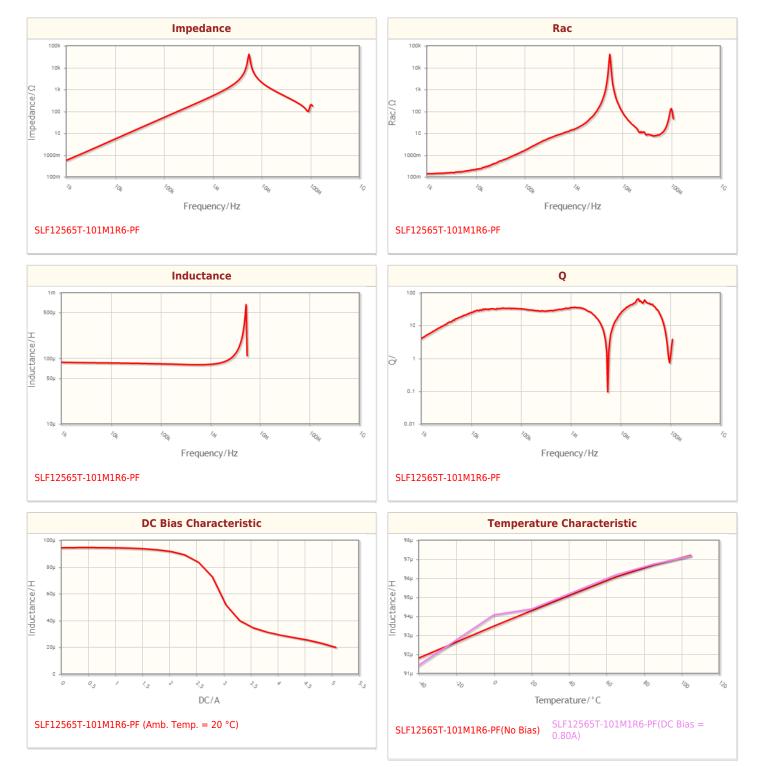

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

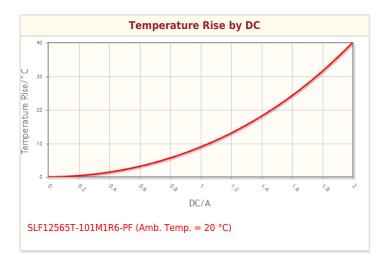

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

## Associated Images

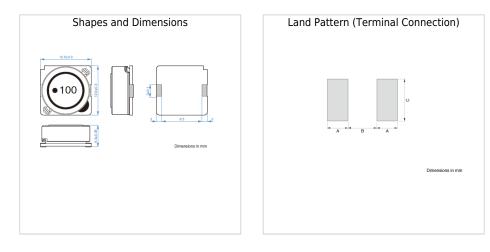

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.