

Inductors (Coils)

Product Top Page Search by Part No. Search by Characteristics Cross Reference Catalog Tech Note Technical Support Tool

CLF6045T-680M-CA

Applications Automotive Grade

- Feature**
- AEC-Q200 AEC-Q200
 - Wire Wound Wire Wound
 - Ferrite Core Ferrite Core
 - Shield Magnetic Shield

Series CLF-CA

Images are for reference only and show exemplary products.

Status Production (Not Recommended for New Design)
Recommended Alternate Part No. : [Contact](#)



Contact

Documents

-

Technical Support Tools

-
-
-








Size	
Length(L)	6.20mm ±0.20mm
Width(W)	5.90mm ±0.20mm
Thickness(T)	4.50mm ±0.30mm
Recommended Land Pattern (A)	1.70mm Nom.
Recommended Land Pattern (B)	3.60mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.

Electrical Characteristics	
Inductance	68µH ±20% at 100kHz
Rated Current (L Change) [Typ.]	790mA (10% Down)
Rated Current (L Change) [Max.]	
Rated Current (Temperature Rise) [Typ.]	1A (30°C Rise)
Rated Current (Temperature Rise) [Max.]	
DC Resistance [Nom.]	215mΩ
DC Resistance [Max.]	258mΩ
Self Resonant Frequency [Min.]	
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C
Soldering Method	Reflow Iron Soldering
AEC-Q200	Yes
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	1000pcs
Weight	0.6g



Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

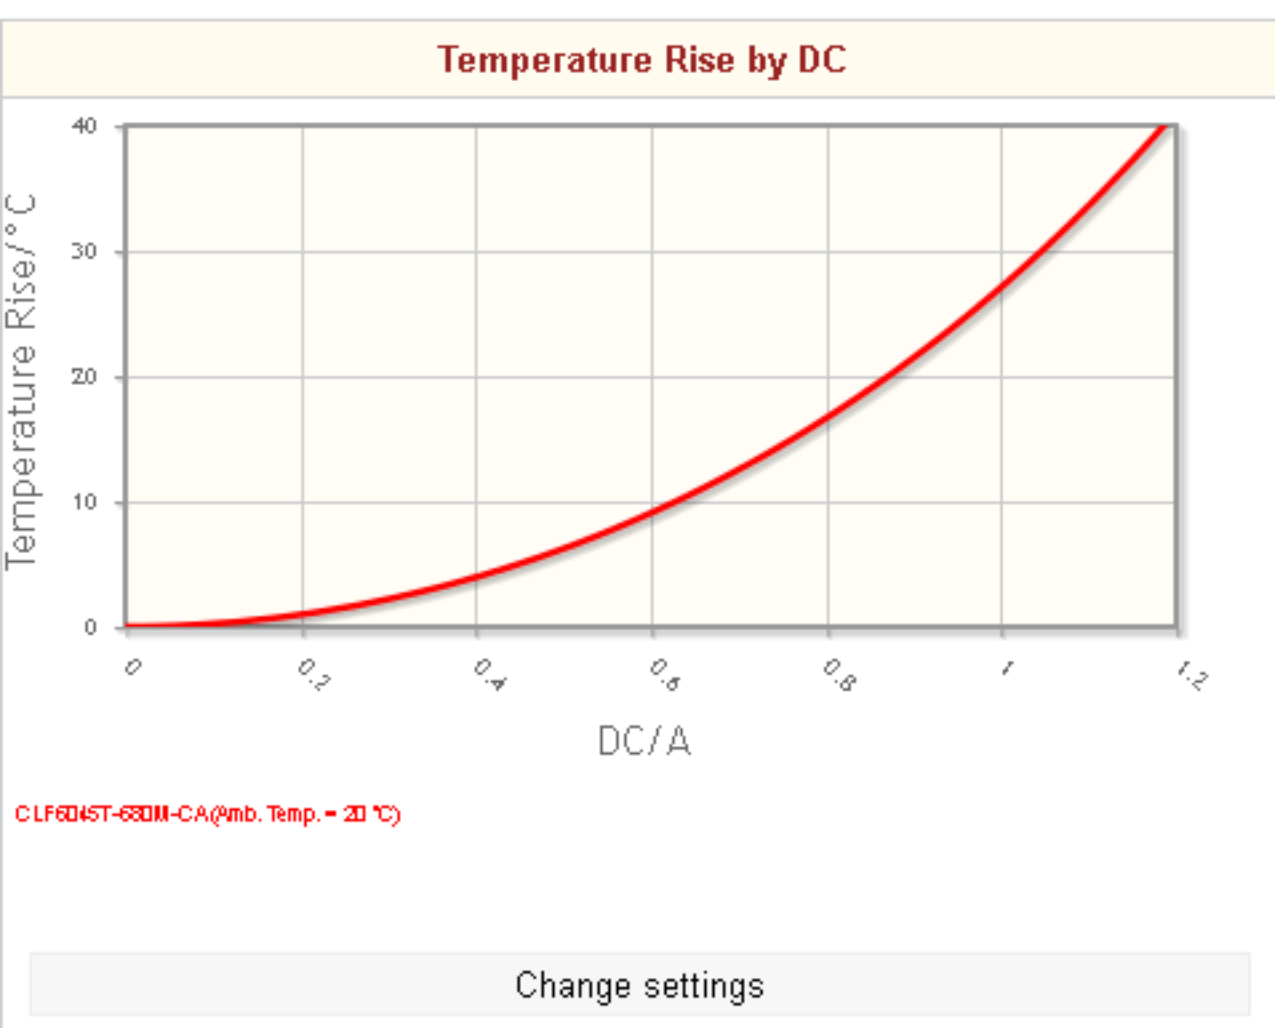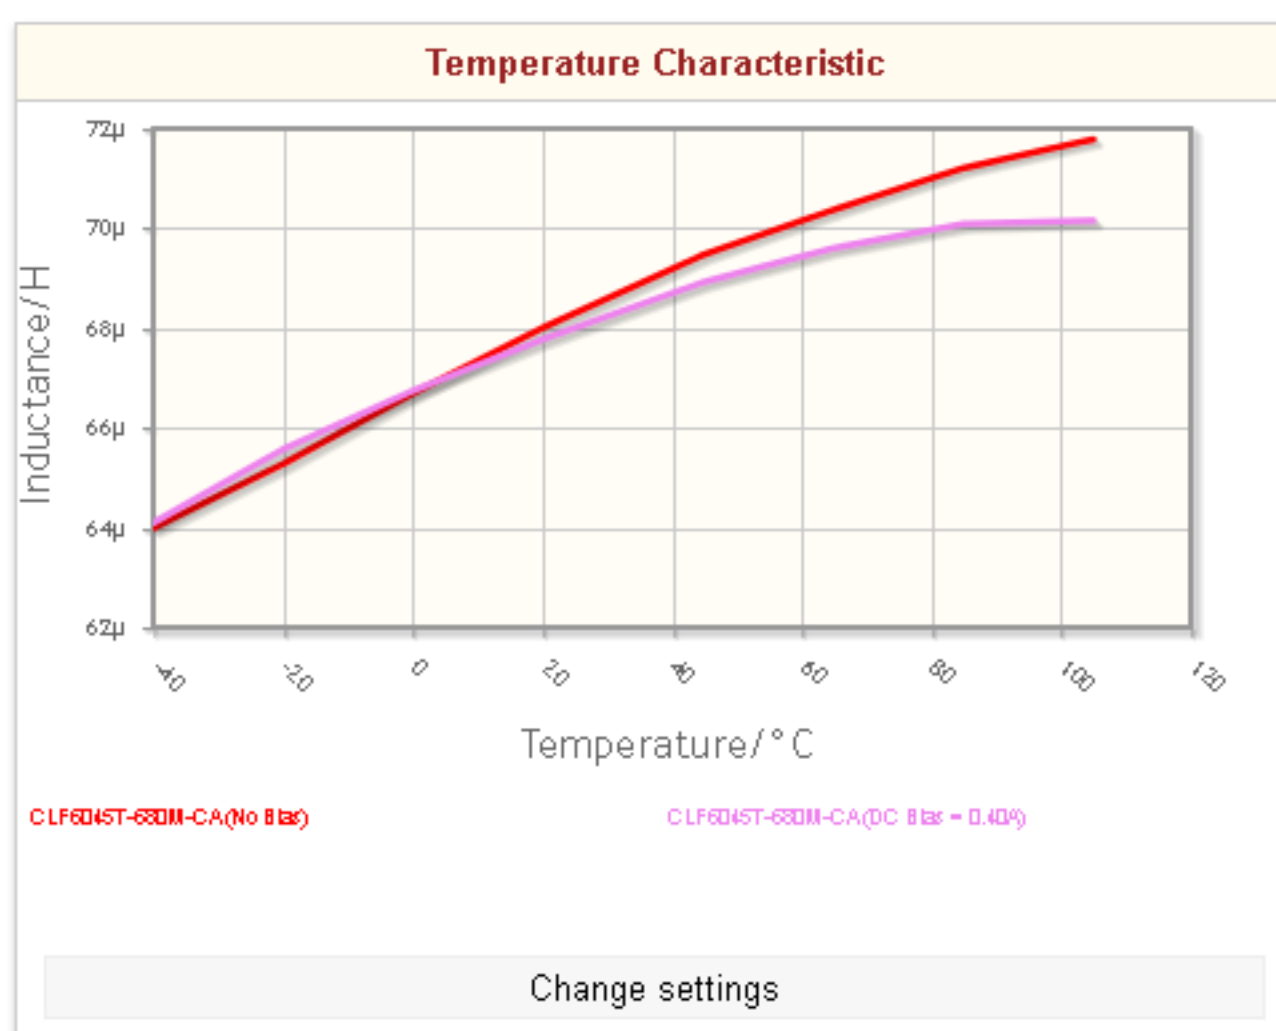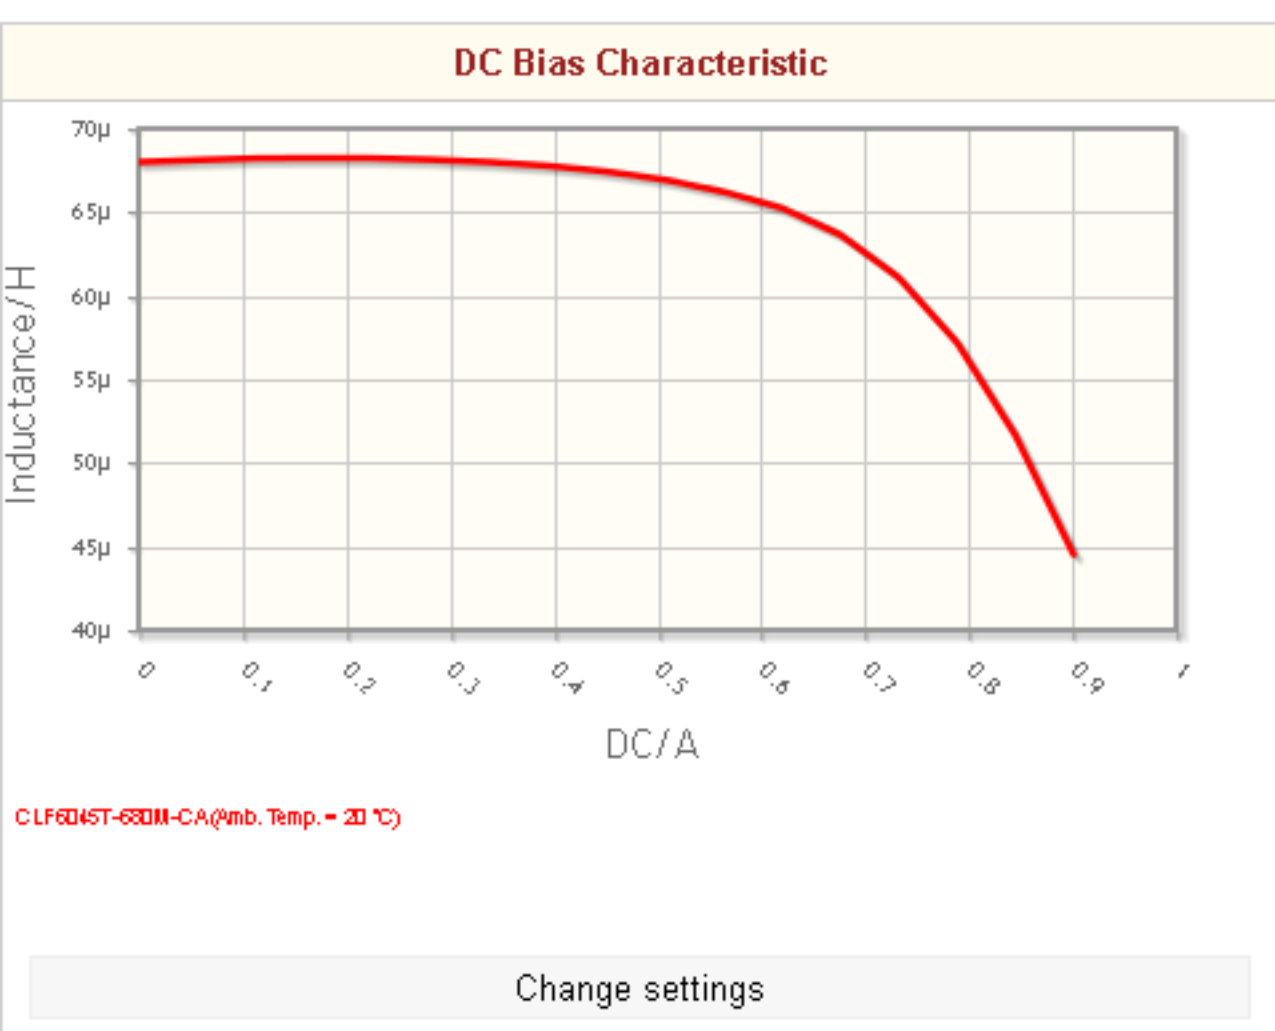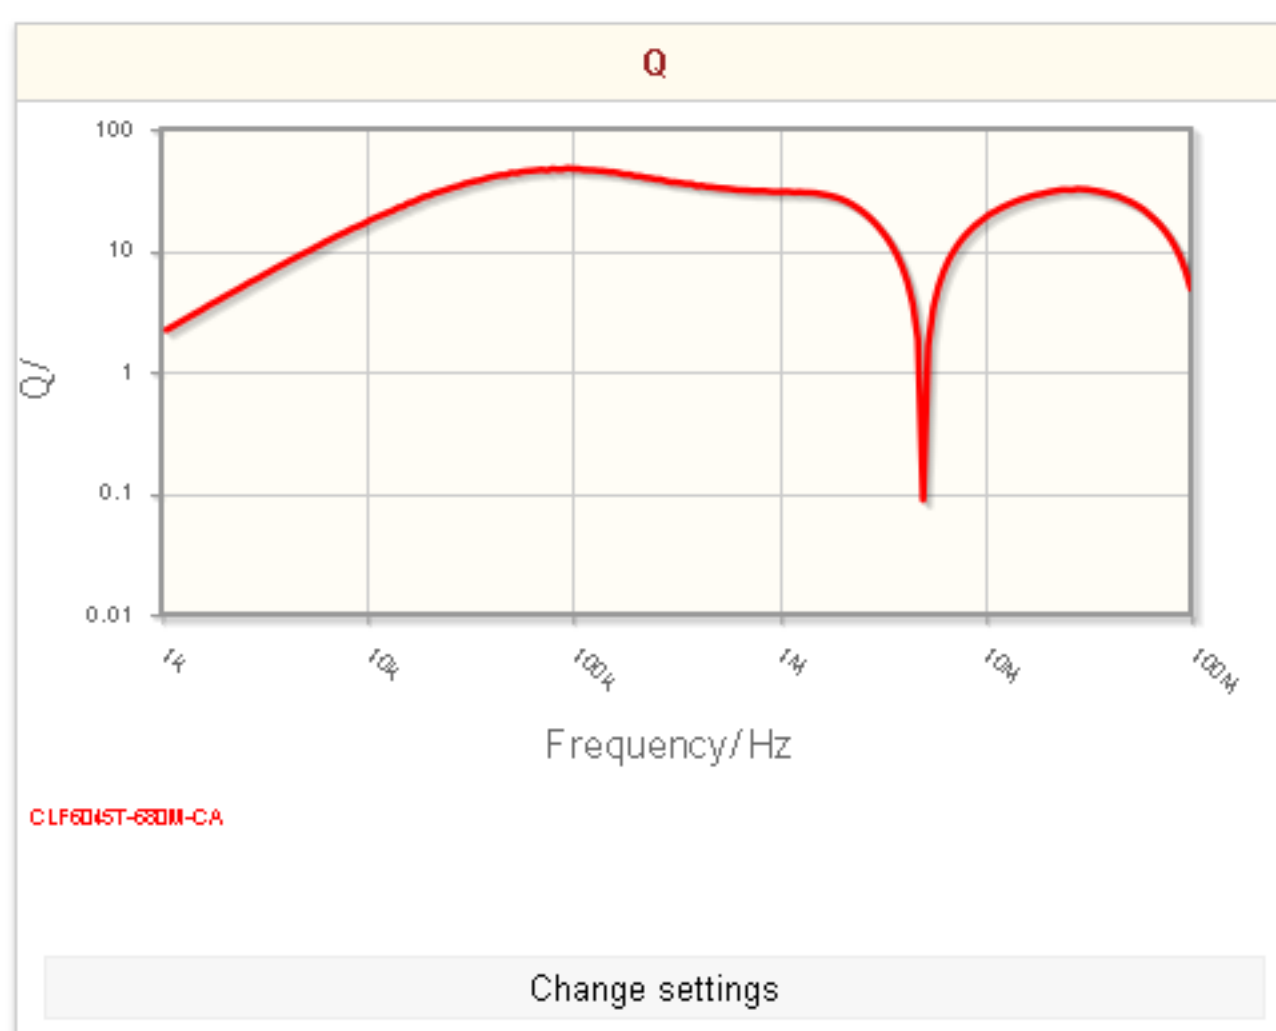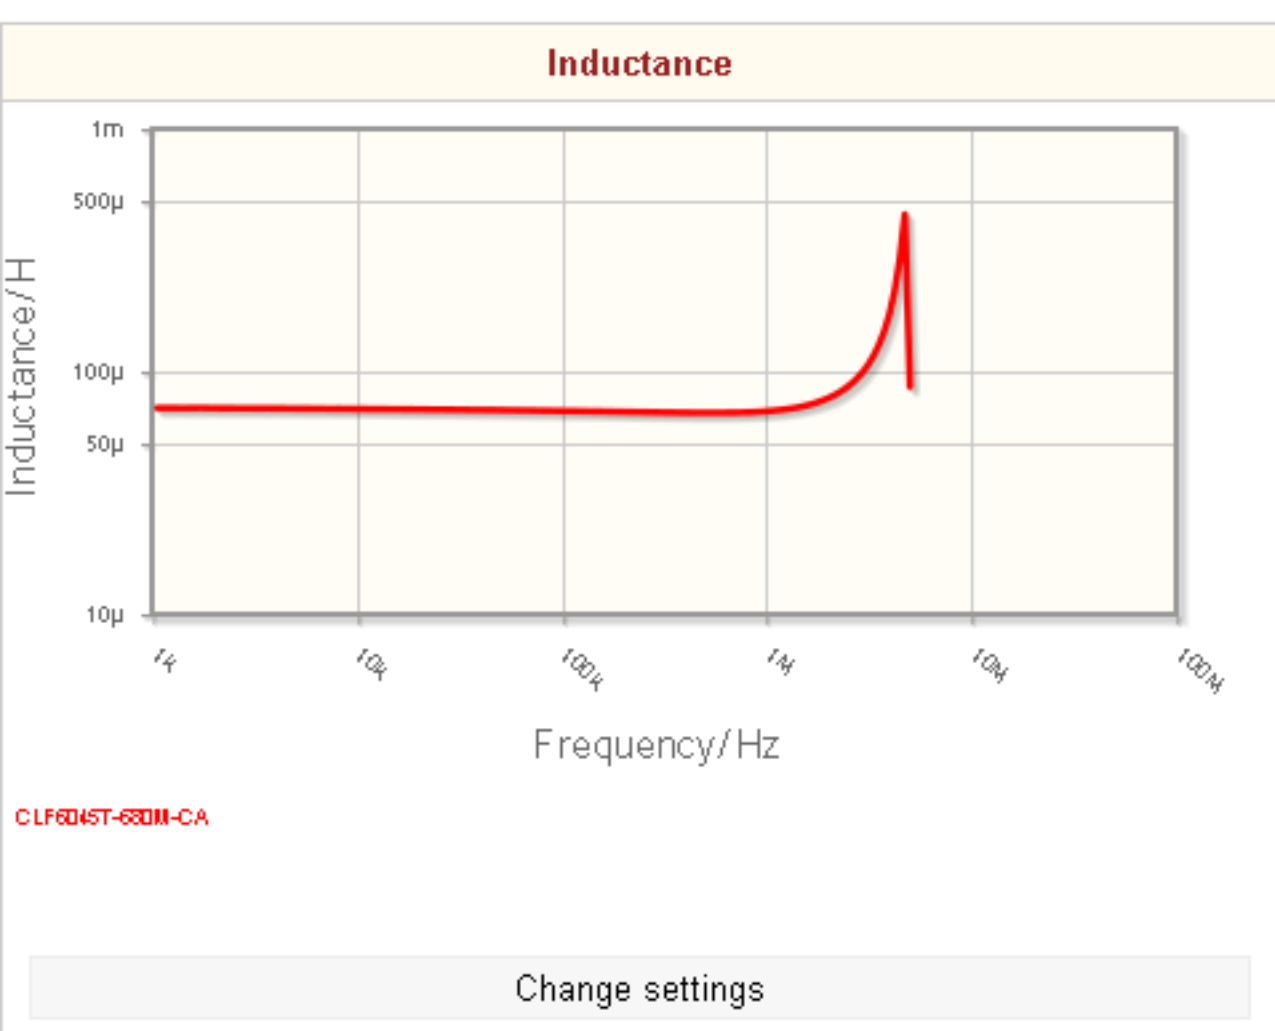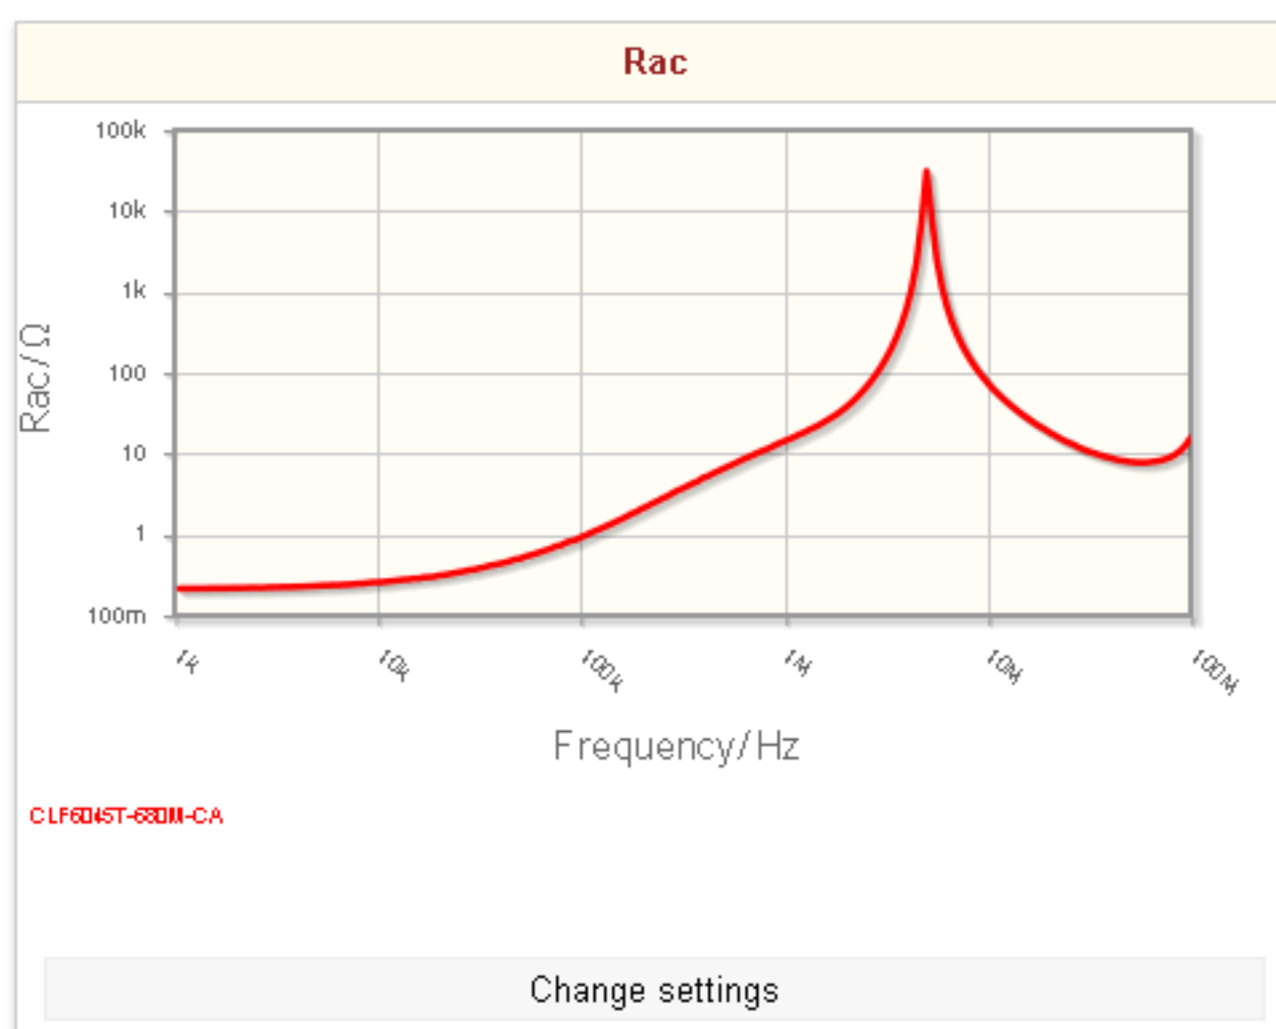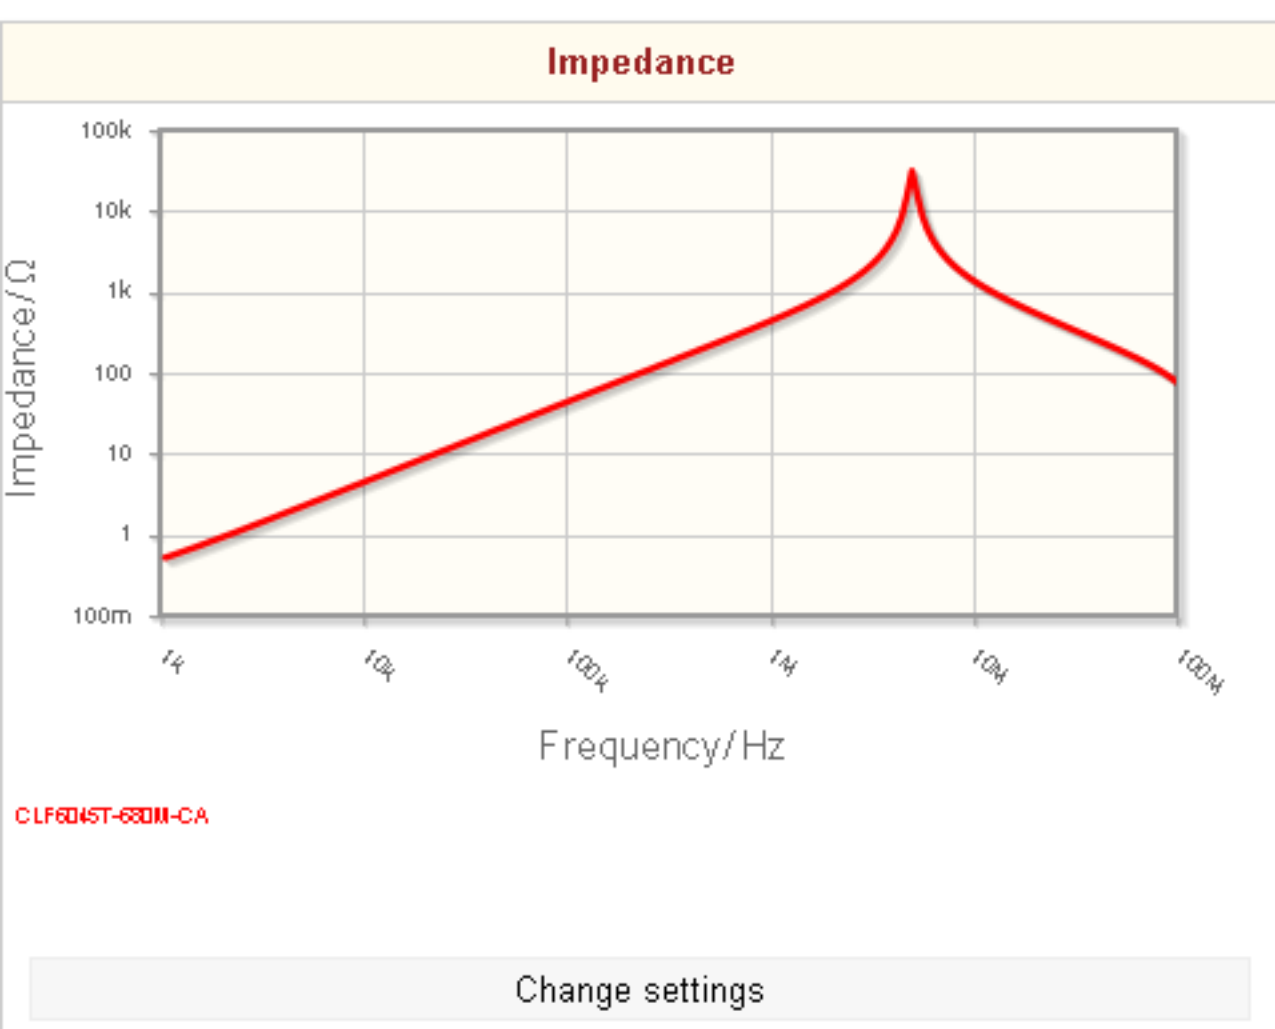

- Products**
- » Search by Part No. » Search by Characteristics » Distributor Inventory Check
 - » Capacitors
 - » Inductors (Coils)
 - » EMC Components
 - » RF / SAW Components and Modules
 - » Voltage / Current / Temperature Protection Devices
 - » Sensors and Sensor Systems
 - » Ceramic Switching / Heating, Piezo Components and Buzzers
 - » Transformers
 - » Ferrites and Accessories
 - » Noise Suppressing / Magnet Sheets
 - » Anechoic Chambers and Radio Wave Absorbers
 - » Power Supplies
 - » Magnets
 - » Flash Storages
 - » Wireless Charging
 - » FA Systems
 - » Transparent Conductive Film
 - » Micro Modules (Substrates with Built-in ICs, Products Utilizing with SESUB)
 - » Solar Cells

- Application Guides**
- Technical Support**
 - Tech Library**
 - Environment**
 - Contact**
 - News**
 - Home**

-
-