&TDK SMD / SMT Inductors (Coils) CLF12555T-331M-D

Applications	Automotive Grade	
Feature	AEC-Q200AEC-Q200	
	Wire Wound Wire Wound	
	Shield Magnetic Shield	
	Ferrite Core	
Series Type	CLF-D	
Status	Production	
Brand	TDK	


Size		
Length(L)	12.50mm ±0.30mm	
Width(W)	12.10mm +0.30,-0.20mm	
Thickness Height	5.50mm ±0.35mm	
Recommended Land Pattern (A)	2.70mm Nom.	
Recommended Land Pattern (B)	8.30mm Nom.	
Recommended Land Pattern (C)	3.20mm Nom.	

Electrical Characteristics			
Inductance	330µH ±20% at 100kHz		
Rated Current (L Change) [Typ.]	1.2A (10% Down)		
Rated Current (L Change) [Max.]			
Rated Current (Temperature Rise) [Typ.]	700mA (30°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	560mΩ		
DC Resistance [Max.]	672mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 150°C		
Coldering Mathead	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	YES		
Packing	Punched (Paper)Taping [330mm Reel]		
Package Quantity	500pcs		
Weight	3g		

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

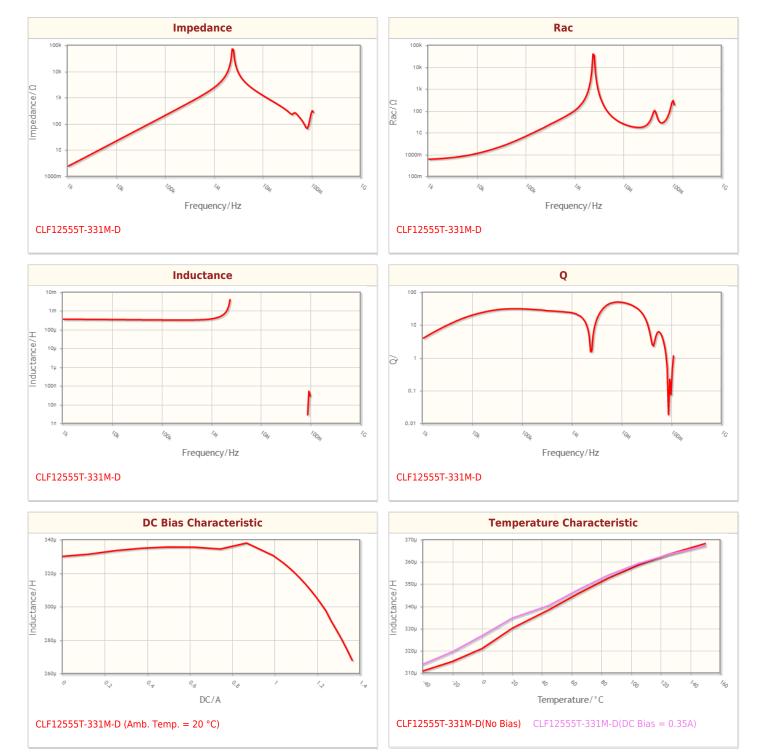

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

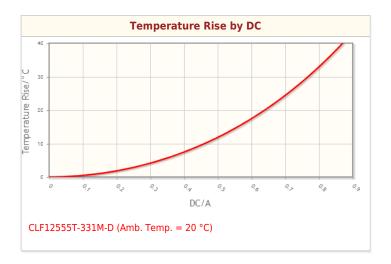

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

Associated Images

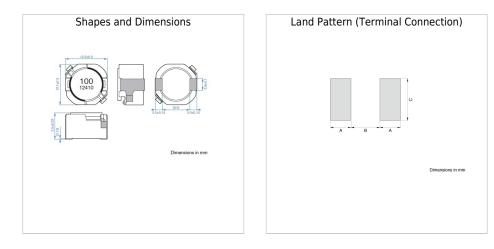

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.