




Features

- Compliant with IEEE802.3ab Draft Standards for 1000 Base-T
- Designed for Long Haul Gigabit Ethernet 10/100/1000 Base-T Full Duplex applications
- Low profile surface mount packaging designed for reflow process (225 ° peak)
- Supports 4 pairs of Category 5 UTP cables

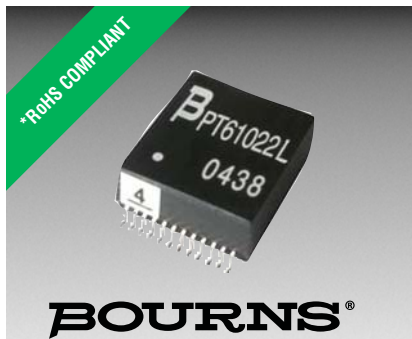

This model is currently available but not recommended for new designs. The [model PT61022XEL](#) is a suggested alternative but not identical - see data sheet for specifications.

- RoHS compliant*

PT61022L LAN 10/100/1000 Base-T Transformer Modules

Electrical Specifications @ 25 °C

Inductance.....	350 μ H min.
with 8 mA DC bias @ 100 KHz, 0.2 V	
Leakage Inductance.....	0.50 μ H max.
@ 100 KHz, 0.2 V	
Interwinding Capacitance.....	25 pF typ.
@ 100 KHz, 0.2 V	
DC Resistance	0.90 Ω max.
Insertion Loss.....	0.3-100 MHz
	-1.1 dB max.
Return Loss (dB min.)	
0.3-30 MHz	-18
40 MHz.....	-14.4
50 MHz.....	-13.1
60-80 MHz	-12
Cross Talk (dB min.)	
0.3-30 MHz	-35
60-100 MHz	-28
Common Mode Rejection (dB min.)	
0.3-30 MHz	-40
60 MHz.....	-35
80-100 MHz	-30
Turns Ratio.....	1 CT:1 $\pm$ 5 %
Isolation Hi-Pot....	1500 VAC 1 mA 1 sec.
Operating Temperature	
	0° C to +70 °C

Packaging Specifications


Tape & Reel..... 500 pcs./reel

How To Order

PT61022E L

Model _____
Termination _____
L = Tin only (RoHS Compliant)

Electrical Schematic

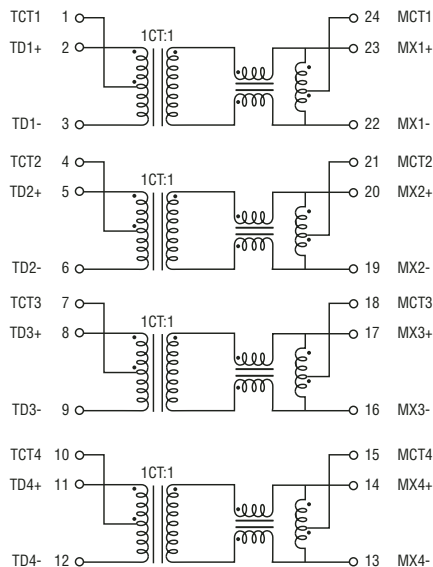

Product Dimensions

