

ATC 200 B Series BX Ceramic Multilayer Capacitors

- Case B Size (.110" x .110")
- Capacitance Range 5000 pF to 0.1 μ F
- Low ESR/ESL
- Mid-K
- Rugged Construction
- High Reliability
- Extended WVDC Available

ATC, the industry leader, offers new improved ESR/ESL performance for the 200 B Series Capacitors. This Series exhibits high volumetric efficiency with superior IR characteristics. Ceramic construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling and DC Blocking.

Typical circuit applications: Switching Power Supplies and High Power Broadband Coupling.

ENVIRONMENTAL TESTS

ATC 200 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:


MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.

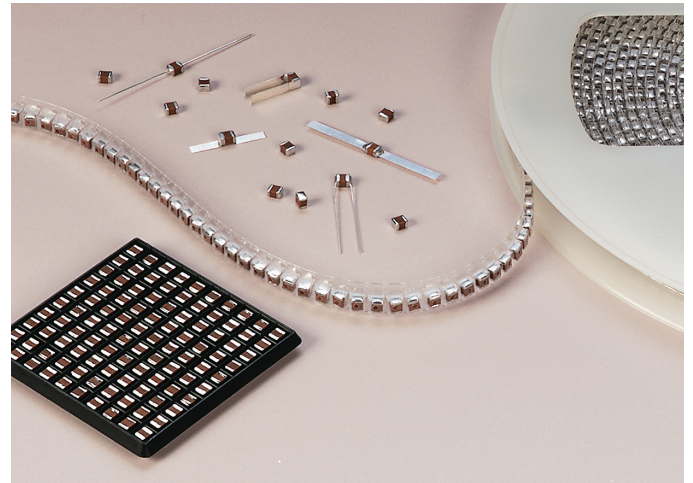

ELECTRICAL AND MECHANICAL SPECIFICATIONS

DISSIPATION FACTOR (DF): 2.5% max. @ 1 KHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC): \pm 15% maximum (-55°C to +125°C)

INSULATION RESISTANCE (IR):

5000 pF to 0.1 MFd:

10⁴ Megohms min. @ +25°C at rated WVDC.

10³ Megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs.

AGING EFFECTS: 3% maximum per decade hour.

PIEZOELECTRIC EFFECTS: Negligible

DIELECTRIC ABSORPTION: 2% typical

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America

sales@atceramics.com

TECHNICAL

ATC Europe

saleseur@atceramics.com

CERAMICS

ATC Asia

sales@atceramics-asia.com

THE ENGINEERS' CHOICE®

ISO 9001 REGISTERED COMPANY

THE ENGINEERS' CHOICE®

www.atceramics.com

ATC # 001-812 Rev. O, 7/20

ATC 200 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	
			STD.	EXT.*				STD.	EXT.*
502	5000	K, M, N	50	100	273	27,000	K, M, N	50	100
562	5600				333	33,000			
682	6800				393	39,000			
822	8200				473	47,000			
103	10,000				503	50,000			
123	12,000				563	56,000			
153	15,000				683	68,000			
183	18,000				823	82,000			
203	20,000				104	100,000			
223	22,000								

$VRMS = 0.707 \times WVDC$


• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE.
PLEASE CONSULT FACTORY.

* Extended WVDC offering meets X7R characteristics

CAPACITANCE TOLERANCE

Code	K	M	N
Tol.	±10%	±20%	±30%

ATC PART NUMBER CODE

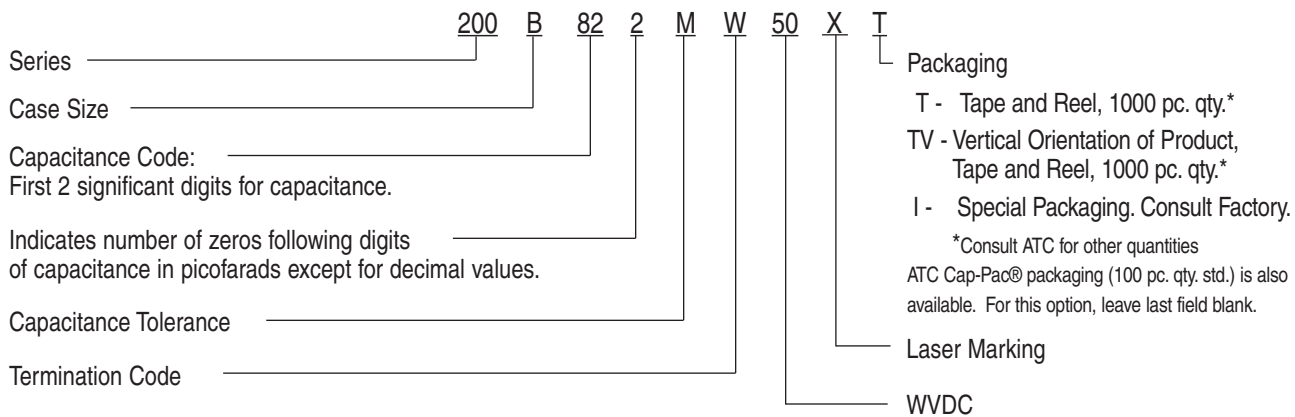

The above part number refers to a 200 B Series (case size B) 8200 pF capacitor, M tolerance (±20%), 50 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Cap-Pac® packaging.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.

Consult factory for additional performance data.



















A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 200 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS			
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS		
200B	W	B  Solder Plate		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination		
200B	P	B  Pellet		.110 +.035 -.010 (2.79 +0.89 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59)		Heavy Tin/Lead Coated, over Nickel Barrier Termination		
200B	T	B  Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59)		RoHS Compliant Tin Plated over Nickel Barrier Termination		
200B	CA	B  Gold Chip		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59)		RoHS Compliant Gold Plated over Nickel Barrier Termination		
200B	MS	B  Microstrip		.135 ±.015 (3.43 ±0.38)	.110 ±.015 (2.79 ±0.38)	.120 (3.05) max.	N/A	Length (L _L)	Width (W _L)	Thickness (T _L)
200B	AR	B  Axial Ribbon				.250 (6.35) min.		.093 ±.005 (2.36 ± 0.13)	.004 ± .001 (.102 ± .025)	
200B	RR	B  Radial Ribbon				.145 ±.020 (3.68 ±0.51)		.100 (2.54) max.	.500 (12.7)	#26 AWG., .016 (.406) dia. nominal
200B	RW	B  Radial Wire								
200B	AW	B  Axial Wire								

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant. For a complete military catalog, request American Technical Ceramics document ATC 001-818.

ATC 200 B Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS			
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS		
200B	WN	Meets Requirements	B Non-Mag Solder Plate		.110+.025 -.010 (2.79 +0.64 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59) max..	.015 (0.38) ±.010 (0.25)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination		
200B	PN	Meets Requirements	B Non-Mag Pellet		.110+.035 -.010 (2.79 +0.89 -0.25)	.110 ±.015 (2.79 ±0.38)			Heavy Tin/Lead, Coated over Non-Magnetic Barrier Termination		
200B	TN	Meets Requirements	B Non-Mag Solderable Barrier		.110+.025 -.010 (2.79 +0.64 -0.25)	.110 ±.015 (2.79 ±0.38)			RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination		
200B	MN	Meets Requirements	B Non-Mag Microstrip		.135 ±.015 (3.43 ±0.38)	.110 ±.015 (2.79 ±0.38)	.120 (3.05) max.	N/A	Length (L _L)	Width (W _L)	Thickness (T _L)
200B	AN	Meets Requirements	B Non-Mag Axial Ribbon						.250 (6.35) (6.35) min.	.093 ± .005 (2.36 ± 0.13)	.004 ± .001 (.102 ± .025)
200B	FN	Meets Requirements	B Non-Mag Radial Ribbon		.145 ±.020 (3.68 ±0.51)	.110 ±.015 (2.79 ±0.38)	.100 (2.54) max.	N/A	.500 (12.7) min.	#26 AWG., .016 (.406) dia. nominal	
200B	RN	Meets Requirements	B Non-Mag Axial Wire								
200B	BN	Meets Requirements	B Non-Mag Radial Wire								

Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation

Vertical Electrode Orientation

	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.120	.050	.075	.175
	High Density	.100	.030	.075	.135

Horizontal Mount					
	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.130	.050	.075	.175
	High Density	.110	.030	.075	.135

A M E R I C A N T E C H N I C A L C E R A M I C S





ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

www.atceramics.com

ATC 200 B Performance Data

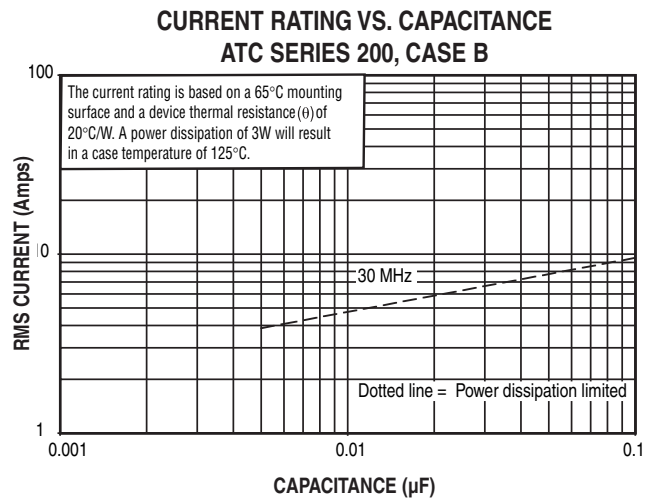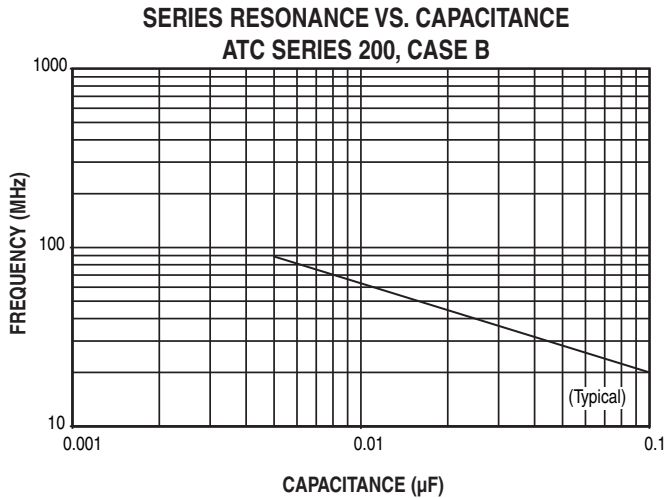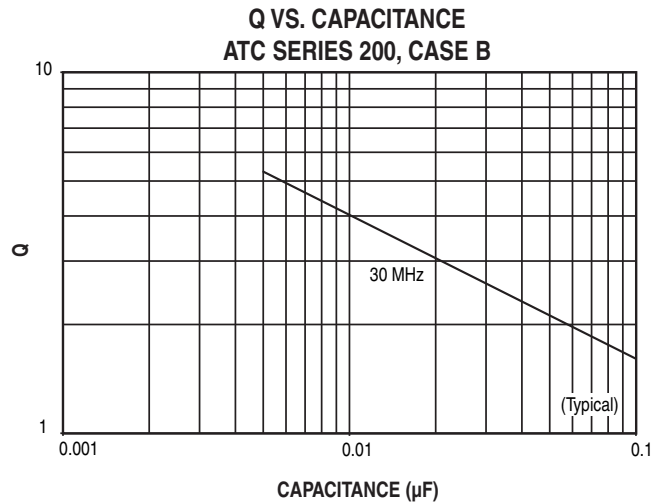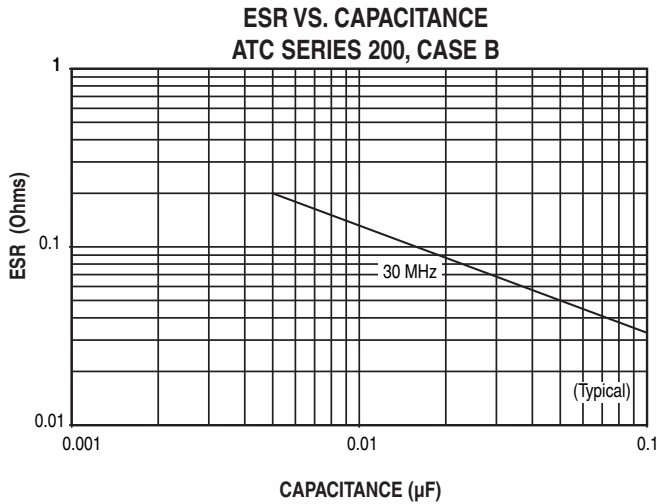

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-812 Rev. O, 7/20



AMERICAN
ATC North America
sales@atceramics.com

TECHNICAL
ATC Europe
saleseur@atceramics.com

CERAMICS
ATC Asia
sales@atceramics-asia.com



THE ENGINEERS' CHOICE®

www.atceramics.com