


Chip Multilayer Hybrid Couplers

Hybrid Dividers

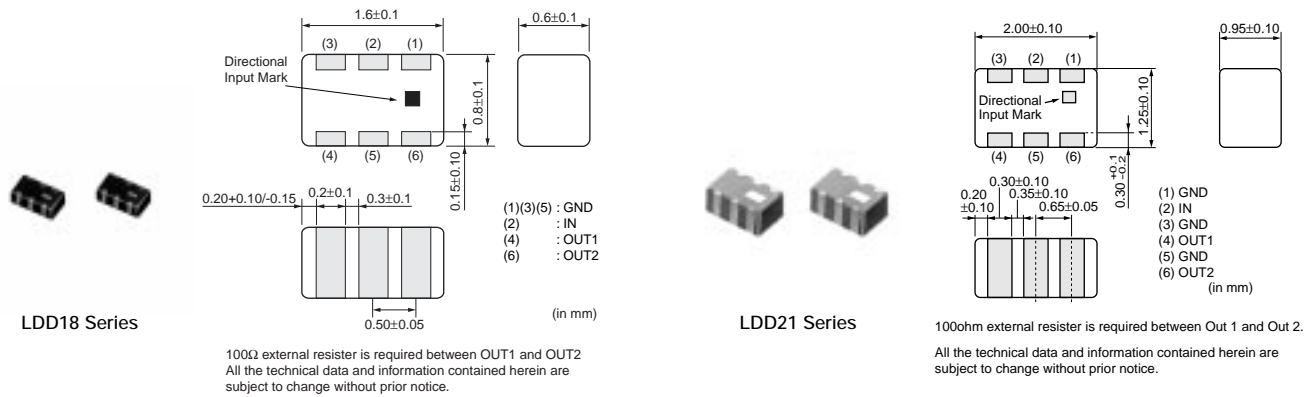

Part Number	Frequency Range (MHz)	Insertion Loss (OUT1,OUT2) (dB)	Isolation (min.) (dB)	VSWR (max.)
LDD18713M03A-164	713.0 ±38.0MHz	3.5 ±0.4dB	17.0	1.6
LDD211G6103A-095	1619.0 ±12.0MHz	3.4 ±0.4dB	17.0	1.5
LDD211G6603A-096	1660.0 ±13.5MHz	3.4 ±0.4dB	20.0	1.5
LDD211G7503A-067	1750.0 ±30.0MHz	3.4 ±0.4dB	20.0	1.5
LDD212G1403A-075	2140.0 ±30.0MHz	3.4 ±0.4dB	22.0	1.5
LDD21718M03A-060	718.5 ±38.0MHz	3.4 ±0.4dB	17.0	1.5
LDD21740M03A-077	740.0 ±19.0MHz	3.4 ±0.4dB	20.0	1.5
LDD21967M03A-068	967.0 ±13.0MHz	3.4 ±0.4dB	20.0	1.5

Characteristics Impedance (Nominal): 50ohm Operating Temperature Range: -40°C to +85°C

△Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.