

# i.MX RT1170 CROSSOVER MCUs

## Ushering in the GHZ ERA

i.MX RT1170 crossover MCUs are setting speed records at 1GHz. This ground-breaking family combines superior computing power and multiple media capabilities with ease of use and real-time functionality.

### PRODUCT HIGHLIGHTS


- High-performing Arm® Cortex®-M based device
  - Up to 6468 total CoreMarks® with Cortex-M7 @ 1 GHz + Cortex-M4 @ 400 MHz
- Real-time, low-latency response
  - Up to 2 MB SRAM:
    - 512 KB Cortex-M7 TCM + 128 KB ECC
    - 256 KB Cortex-M4 TCM with ECC
    - 1 MB on-chip RAM + 128 KB ECC
  - Fast real-time response with latency as low as 12 ns
- Low-power operation
  - Low dynamic power with integrated DC-DC converter
  - Low-power run modes at 24 MHz
- Highly integrated
  - Advanced multimedia for GUI and enhanced HMI
    - Multiple display and CMOS sensor interfaces
    - OpenVG™ graphics accelerator running up to 500 MHz

- Extensive memory interface options
  - Quad/Octal SPI and HyperFlash™/HyperRAM™, SDRAM, NAND/NOR Flash, SD/eMMC, PSRAM, LPDDR4
- Security
  - Hardware Elliptic Curve Cryptography
  - Hardware-protected keys for secure boot
  - AES engine for data encryption
  - On-the-fly AES decryption for execute-in-place (NOR) from Quad/Octal SPI/HyperFlash
  - Part of the EdgeLock™ Assurance program, more details available at [nxp.com/EdgeLockAssurance](http://nxp.com/EdgeLockAssurance)

### TARGET APPLICATIONS

- ML-based edge applications
- Industrial computing designs
- Motor control and power conversion
- Personal health and fitness
- Voice-enabled IoT devices

### i.MX RT1170 CROSSOVER MCU FAMILY BLOCK DIAGRAM

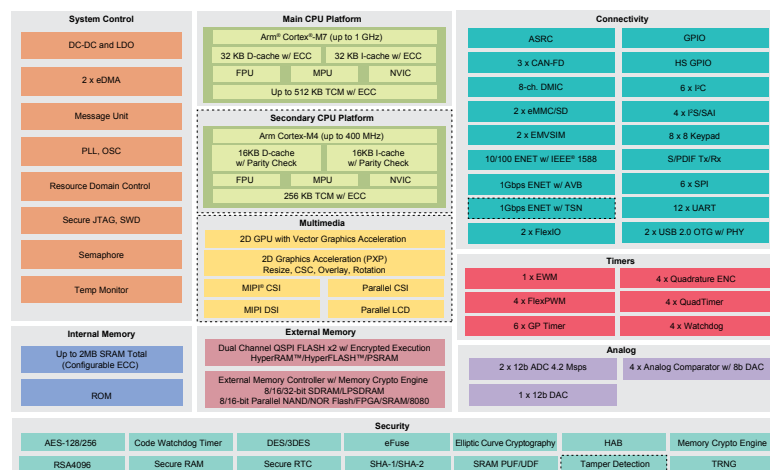

Available on certain products within the family


## i.MX RT1170 MCU FAMILY CONFIGURATIONS

Device	i.MX RT1171	i.MX RT1172	i.MX RT1173	i.MX RT1175	i.MX RT1176
Arm® Cortex®-M7	1 GHz/800 MHz*	1 GHz/800 MHz*	800 MHz	1 GHz/800 MHz*	1 GHz/800 MHz*
Cortex-M4	-	-	400 MHz	400 MHz	400 MHz
MIPI CSI / DSI	-	Y	Y	-	Y
OpenVG™ 1.1	-	Y	Y	-	Y
CSI / LCDIF / PXP	-	Y	Y	-	Y
Ethernet	Y	Y	Y	Y	Y
TSN	-	-	-	-	Y
Tamper Protection	-	-	Y	-	-
HAB/AES/DES	Y	Y	Y	Y	Y
Packages	289 MAPBGA	289 MAPBGA	289 MAPBGA	289 MAPBGA	289 MAPBGA
Qualification/ Temperature	Commercial/0-95 °C Industrial/-40 – 105 °C Auto/-40 – 125 °C	Commercial/0 – 95 °C Industrial/-40 – 105 °C Auto/-40 – 125 °C	Industrial/-40 – 105 °C	Commercial/0 – 95 °C Industrial/-40 – 105 °C Auto/-40 – 125 °C	Commercial/0 – 95 °C Industrial/-40 – 105 °C Auto/-40 – 125 °C
Part Numbers	MIMXRT1171DVMAA MIMXRT1171CVM8A MIMXRT1171AVM8A	MIMXRT1172DVMAA MIMXRT1172CVM8A MIMXRT1172AVM8A	MIMXRT1173CVM8A	MIMXRT1175DVMAA MIMXRT1175CVM8A MIMXRT1175AVM8A	MIMXRT1176DVMAA MIMXRT1176CVM8A MIMXRT1176AVM8A

\*First speed listed is speed for commercial-qualified device. Second speed listed is for industrial- and automotive-qualified devices.

## i.MX RT1170 EVK FEATURES

Processor	<ul style="list-style-type: none"> <li>MIMXRT1176DVMAA</li> </ul>
Memory	<ul style="list-style-type: none"> <li>512 Mbit SDRAM memory</li> <li>512 Mbit Octal flash</li> <li>128 Mbit QSPI flash</li> <li>2 Gbit Raw NAND flash</li> <li>64 Mbit LPSPFI flash</li> <li>TF socket for SD card</li> </ul>
Graphics	<ul style="list-style-type: none"> <li>MIPI LCD connector</li> <li>MIPI camera sensor connector</li> </ul>
Audio	<ul style="list-style-type: none"> <li>Audio codec</li> <li>4-pole audio headphone jack</li> <li>External speaker connection</li> <li>Microphone (analog and digital)</li> <li>SPDIF connector</li> </ul>
Connectivity	<ul style="list-style-type: none"> <li>2 x Micro USB OTG connectors</li> <li>Ethernet (10/100/1000M) connector</li> <li>Ethernet (10/100M) connector</li> <li>M.2 connector</li> <li>CAN transceivers</li> <li>Arduino® interface</li> <li>FRDM motor control interface</li> <li>SIM card slot</li> </ul>
Debug	<ul style="list-style-type: none"> <li>JTAG connector</li> <li>Onboard DAP-Link debugger</li> </ul>
Sensor	<ul style="list-style-type: none"> <li>6-Axis ecompass (3-Axis magnetometer, 3-Axis accelerometer) sensor FXOS8700CQ</li> </ul>
Ordering Information	<ul style="list-style-type: none"> <li>MIMXRT1170-EVK</li> <li>RK055HDMI4M (5.5" 720p display)</li> </ul>

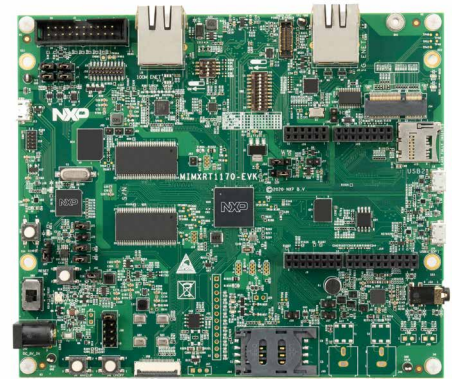

### GET STARTED NOW

The i.MX RT1170 evaluation kit (EVK) helps you take your design to the next level by reducing complexity and accelerating time to market.

### SOFTWARE AND TOOLS

NXP's **MCUXpresso software and tools** offer comprehensive development solutions designed to optimize, ease and accelerate embedded system development of applications based on Cortex-M core devices from NXP, including its general purpose, crossover and Bluetooth-enabled MCUs.

[nxp.com/iMXRT1170](http://nxp.com/iMXRT1170)

NXP, the NXP logo and Kinetis and eIQ are trademarks of NXP B.V. All other product or service names are the property of their respective owners. OpenVG and the OpenVG logo are trademarks of the Khronos Group, Inc. Arm and Cortex are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2021 NXP B.V.

Document Number: IMXRT1170FAMFS REV 2



Product Longevity