

# MPC8245 Hardware Specifications Addendum for the MPC8245ARXXnnnx Series

Specifications provided in this document supersede those in the *MPC8245 Integrated Processor Hardware Specifications*, Rev. 3 or later, for the part numbers listed in [Table A](#) only.

Specifications not addressed in this document are unchanged. Because this document is frequently updated, refer to <http://www.freescale.com> or to your Freescale sales office for the latest version.

Note that headings and table numbers in this document are not consecutively numbered. They are intended to correspond to the heading or table affected in the general hardware specification.

Part numbers addressed in this document are listed in [Table A](#). For more detailed ordering information, see [Section 9, "Ordering Information."](#)

*Freescale Part Numbers Affected:*

*MPC8245ARZU400D*

*MPC8245ARVV400D*

Table A. Part Numbers Addressed in this Data Sheet

| Freescale Part No. <sup>1</sup> | Operating Conditions |                 |                     | Significant Differences from Hardware Specification                | Processor Version Register Value |
|---------------------------------|----------------------|-----------------|---------------------|--|----------------------------------|
|                                 | CPU Frequency (MHz)  | V <sub>DD</sub> | T <sub>J</sub> (°C) |  |                                  |
| MPC8245ARZU400D                 | 400                  | 2.1 ± 100 mV    | 0 to 85             | Modified voltage and temperature specifications to achieve 400 MHz | 0x80811014                       |
| MPC8245ARVV400D                 |                      |                 |                     |  |                                  |

**Note:**

The 'A' in the part number represents parts that are manufactured under a 29-angstrom process instead of the original 35-angstrom process. Package Options: ZU - TBGA, V V- Lead Free TBGA

## 4 Electrical and Thermal Characteristics

This section provides the AC and DC electrical specifications and thermal characteristics for the MPC8245.

### 4.1.1 Absolute Maximum Ratings

The tables in this section describe the MPC8245 DC electrical characteristics. [Table 1](#) provides the absolute maximum ratings.

Table 1. Absolute Maximum Ratings

| Characteristic <sup>1</sup>                  | Symbol  | Range       | Unit |
|--|---|-------------|------|
| Supply voltage—CPU core and peripheral logic | V <sub>DD</sub>                                 | −0.3 to 2.2 | V    |
| Supply voltage—memory bus drivers            | GV <sub>DD</sub>                                | −0.3 to 3.6 | V    |
| Supply voltage—PCI and standard I/O buffers  | OV <sub>DD</sub>                                | −0.3 to 3.6 | V    |
| Supply voltage—PLLs                          | AV <sub>DD</sub> /AV <sub>DD</sub> <sup>2</sup> | −0.3 to 2.2 | V    |
| Supply voltage—PCI reference                 | LV <sub>DD</sub>                                | −0.3 to 5.4 | V    |
| Input voltage <sup>2</sup>                   | V <sub>in</sub>                                 | −0.3 to 3.6 | V    |
| Operational die-junction temperature range   | T <sub>j</sub>                                  | 0 to 85     | °C   |
| Storage temperature range                    | T <sub>stg</sub>                                | −55 to 150  | °C   |

**Notes:**

- [Table 2](#) shows functional and tested operating conditions. Absolute maximum ratings are stress ratings only, and functional operation at the maximums is not guaranteed. Stresses beyond those listed may affect device reliability or cause permanent damage to the device.
- PCI inputs with LV<sub>DD</sub> = 5 V ± 5% V DC may undergo corresponding stress at voltages exceeding LV<sub>DD</sub> + 0.5 V DC.

## 4.1.2 Recommended Operating Conditions

Table 2 provides the recommended operating conditions for the MPC8245 part numbers described herein.

**Table 2. Recommended Operating Conditions <sup>(1)</sup>**

| Characteristic                          | Symbol     | Recommended Value for 400 MHz CPU | Unit |
|---|------------|-----------------------------------|------|
| Supply voltage                          | $V_{DD}$   | 2.1 V $\pm$ 100 mV                | V    |
| CPU PLL supply voltage                  | $AV_{DD}$  | 2.1 V $\pm$ 100 mV                | V    |
| PLL supply voltage—peripheral logic     | $AV_{DD2}$ | 2.1 V $\pm$ 100 mV                | V    |
| Die-junction temperature <sup>(2)</sup> | $T_j$      | 0 to 85                           | °C   |

**Notes:**

1. Freescale tested these operating conditions and recommends them. Proper device operation outside of these conditions is not guaranteed.
2. For information about the thermal characteristics of this part, refer to the *MPC8245 Integrated Processor Hardware Specifications*. Note that the lower die-junction temperature creates a greater need to use a heat sink with this part.

## 4.1.5 Power Characteristics

The AC electrical characteristics and AC timing for the parts described in this document are unaffected, and comply with the *MPC8245 Integrated Processor Hardware Specifications*. Table 5 provides the power consumption for the MPC8245 part numbers described herein.

**Table 5. Power Consumption**

| Mode    | PCI Bus Clock/Memory Bus Clock<br>CPU Clock Frequency (MHz) | Unit | Notes   |
|---------|---|------|---------|
|         | 66/133/399  |      |         |
| Typical | 2.8   | W    | 1, 5    |
| Max—CFP | 3.3   | W    | 1, 2    |
| Max—INT | 2.8   | W    | 1, 3    |
| Doze    | 1.9   | W    | 1, 4, 6 |
| Nap     | 0.7   | W    | 1, 4, 6 |
| Sleep   | 0.4   | W    | 1, 4, 6 |

Table 5. Power Consumption (continued)

| Mode                                   | PCI Bus Clock/Memory<br>Bus Clock<br>CPU Clock Frequency<br>(MHz) | Unit | Notes |
|--|---|------|-------|
|  | 66/133/399  |      |       |
| <b>I/O Power Supplies<sup>10</sup></b> |   |      |       |
| Mode                                   | Range   | Unit | Notes |
| T <sub>yp</sub> —OV <sub>DD</sub>      | 140–360   | mW   | 7, 8  |
| T <sub>yp</sub> —GV <sub>DD</sub>      | 340–920   | mW   | 7, 9  |

**Notes:**

1. The values include V<sub>DD</sub>, AV<sub>DD</sub>, and AV<sub>DD2</sub>, but do not include I/O supply power.
2. Maximum—FP power is measured at V<sub>DD</sub> = 2.1 V with dynamic power management enabled while running an entirely cache-resident, looping, floating point multiplication instruction.
3. Maximum—INT power is measured at V<sub>DD</sub> = 2.1 V with dynamic power management enabled while running entirely cache-resident, looping, integer instructions.
4. Power saving mode maximums are measured at V<sub>DD</sub> = 2.1 V while the device is in doze, nap, or sleep mode.
5. Typical power is measured at V<sub>DD</sub> = AV<sub>DD</sub> = 2.1 V, OV<sub>DD</sub> = 3.3 V where a nominal FP value, a nominal INT value, and a value where there is a continuous flush of cache lines with alternating ones and zeros on 64-bit boundaries to local memory are averaged.
6. Power saving mode data measured with only two PCI\_CLKs and two SDRAM\_CLKs enabled.
7. The typical minimum I/O power values was the result of the MPC8245 performing cache resident integer operations at the slowest frequency combination of 33:66:200 (PCI:Mem:CPU) MHz.
8. The typical maximum OV<sub>DD</sub> value resulted from the MPC8245 operating at the fastest frequency combination of 66:133:399 (PCI:Mem:CPU) MHz for the 400-MHz part, and performing continuous flushes of cache lines with alternating ones and zeros to PCI memory.
9. The typical maximum GV<sub>DD</sub> value resulted from the MPC8245 operating at the fastest frequency combination of 66:133:399 (PCI:Mem:CPU) MHz for the 400-MHz part, and performing continuous flushes of cache lines with alternating ones and zeros on 64-bit boundaries to local memory.
10. Power consumption of PLL supply pins (AV<sub>DD</sub> and AV<sub>DD2</sub>) < 15 mW that the design guarantees but were not tested.

### 4.3.1 Clock AC Specifications

Figure 7 through Figure 10 show the DLL locking range loop delay vs. frequency of operation for 29 angstrom parts. These graphs define the areas of DLL locking for various modes. The gray areas show where the DLL will lock.

Register settings that define each DLL mode are shown in [Table 9](#).

**Table 9. DLL Mode Definition**

| DLL Mode                           | Value of Bit 2 of Config Register at 0x76 | Value of Bit 7 of Config Register at 0x72 |
|------------------------------------|---|---|
| Normal tap delay,<br>No DLL extend | 0   | 0   |
| Normal tap delay,<br>DLL extend    | 0   | 1   |
| Max tap delay,<br>No DLL extend    | 1   | 0   |
| Max tap delay,<br>DLL extend       | 1   | 1   |

The `DLL_MAX_DELAY` bit can lengthen the amount of time through the delay line. This is accomplished by increasing the time between each of the 128 tap points in the delay line. Although this increased time makes it easier to guarantee that the reference clock will be within the DLL lock range, it also means there may be slightly more jitter in the output clock of the DLL, should the phase comparator shift the clock between adjacent tap points. Refer to Freescale application note AN2164, *MPC8245/MPC8241 Memory Clock Design Guidelines:Part 1*, for details about DLL modes and memory design.

The value of the current tap point once the DLL has locked can be determined by reading bits 6–0 (`DLL_TAP_COUNT`) of the DLL tap count register (DTCR, located at offset 0xE3). These bits store the value (binary 0 through 127) of the current tap point and can indicate whether the DLL advances or decrements as it maintains the DLL lock. Therefore, for evaluation purposes, DTCR can be read for all DLL modes that support the  $T_{loop}$  value that is used for the trace length of `SDRAM_SYNC_OUT` to `SDRAM_SYNC_IN`. The DLL mode that provides the smallest tap point value seen in DTCR should be used. This is because the bigger the tap point value, the more jitter that can be expected for clock signals. Note that keeping a DLL mode that is locked below tap point 12 is not recommended.

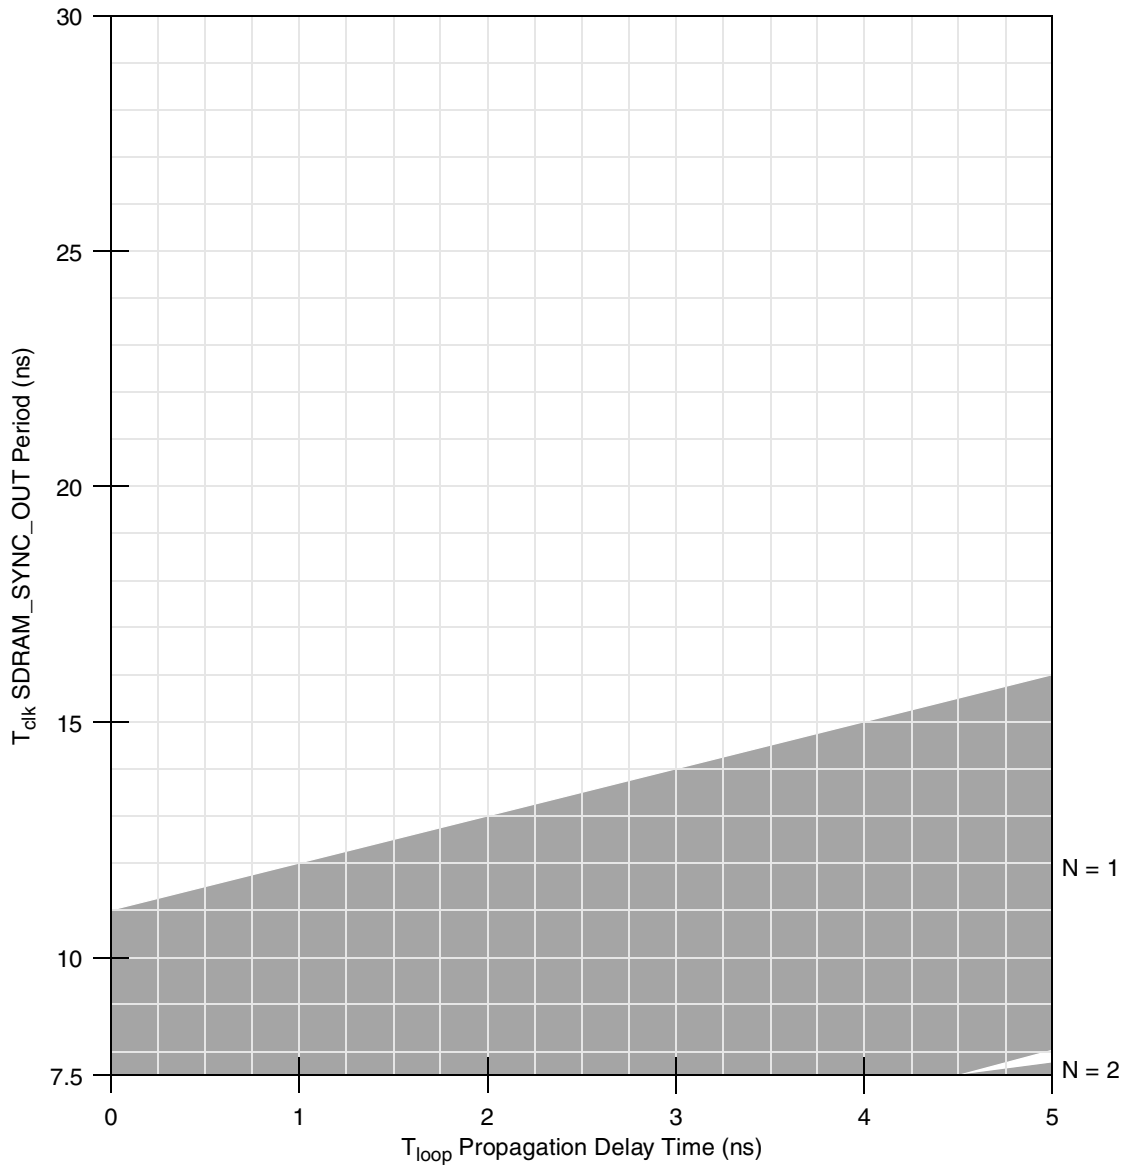


Figure 7. DLL Locking Range Loop Delay vs. Frequency of Operation for DLL\_Extend = 0 and Normal Tap Delay

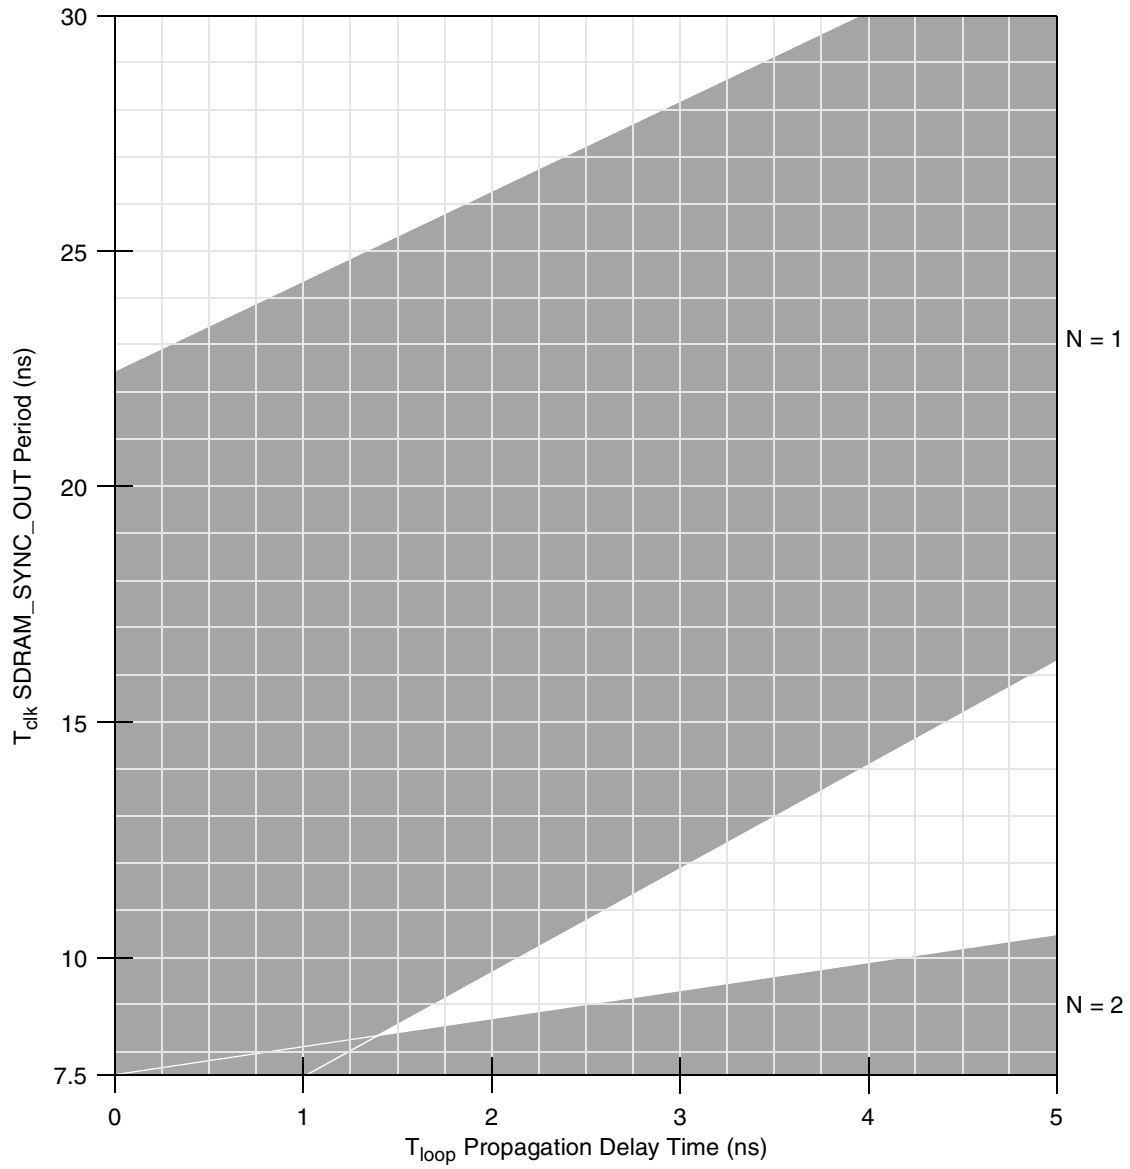
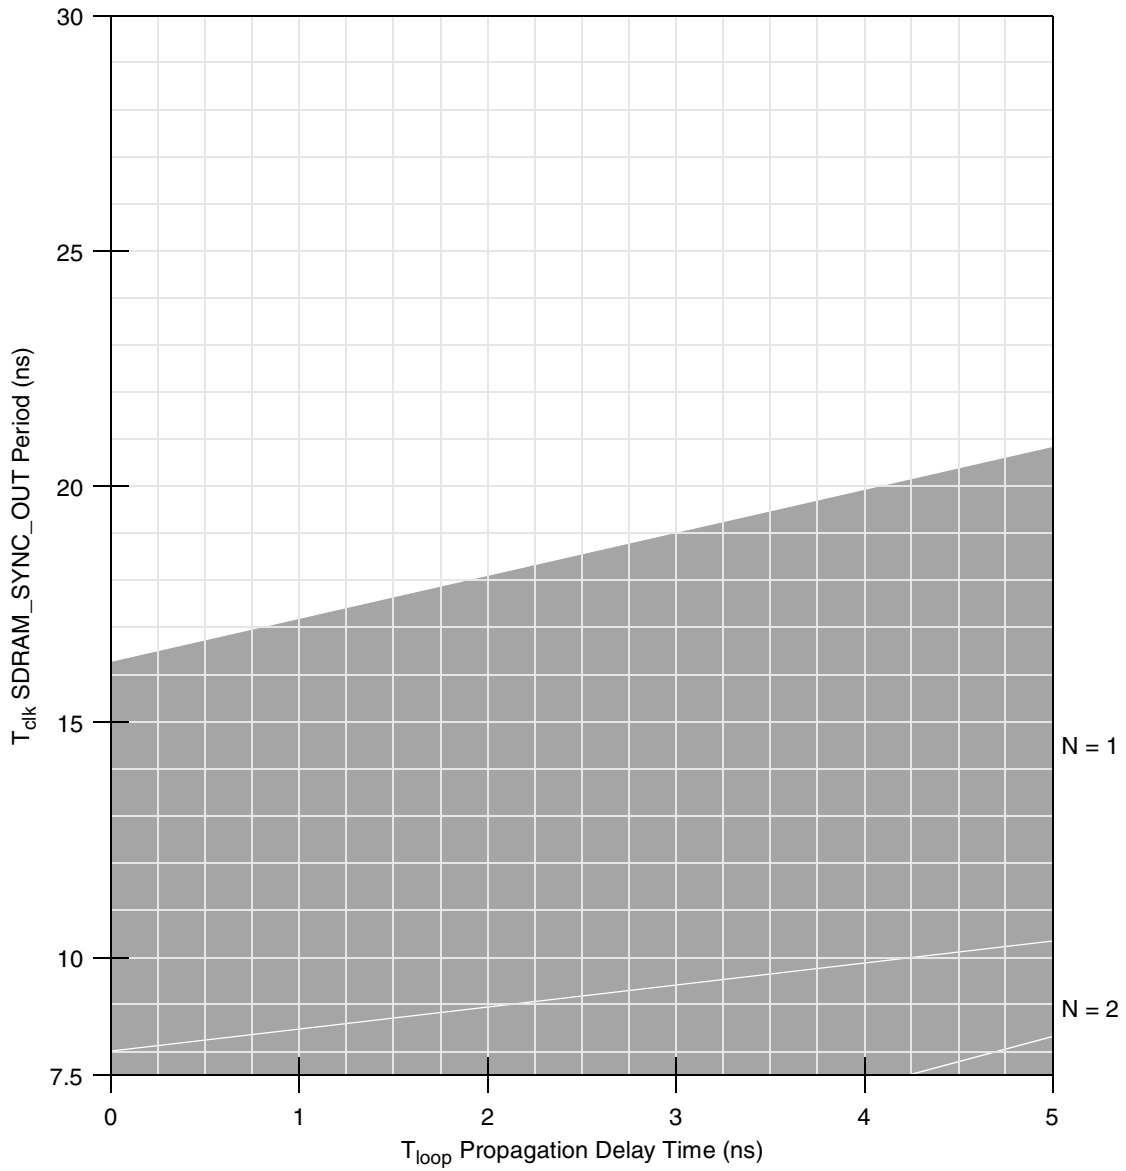


Figure 8. DLL Locking Range Loop Delay vs. Frequency of Operation for DLL\_Extend = 1 and Normal Tap Delay



**Figure 9. DLL Locking Range Loop Delay vs. Frequency of Operation for DLL\_Extend = 0 and Max Tap Delay**



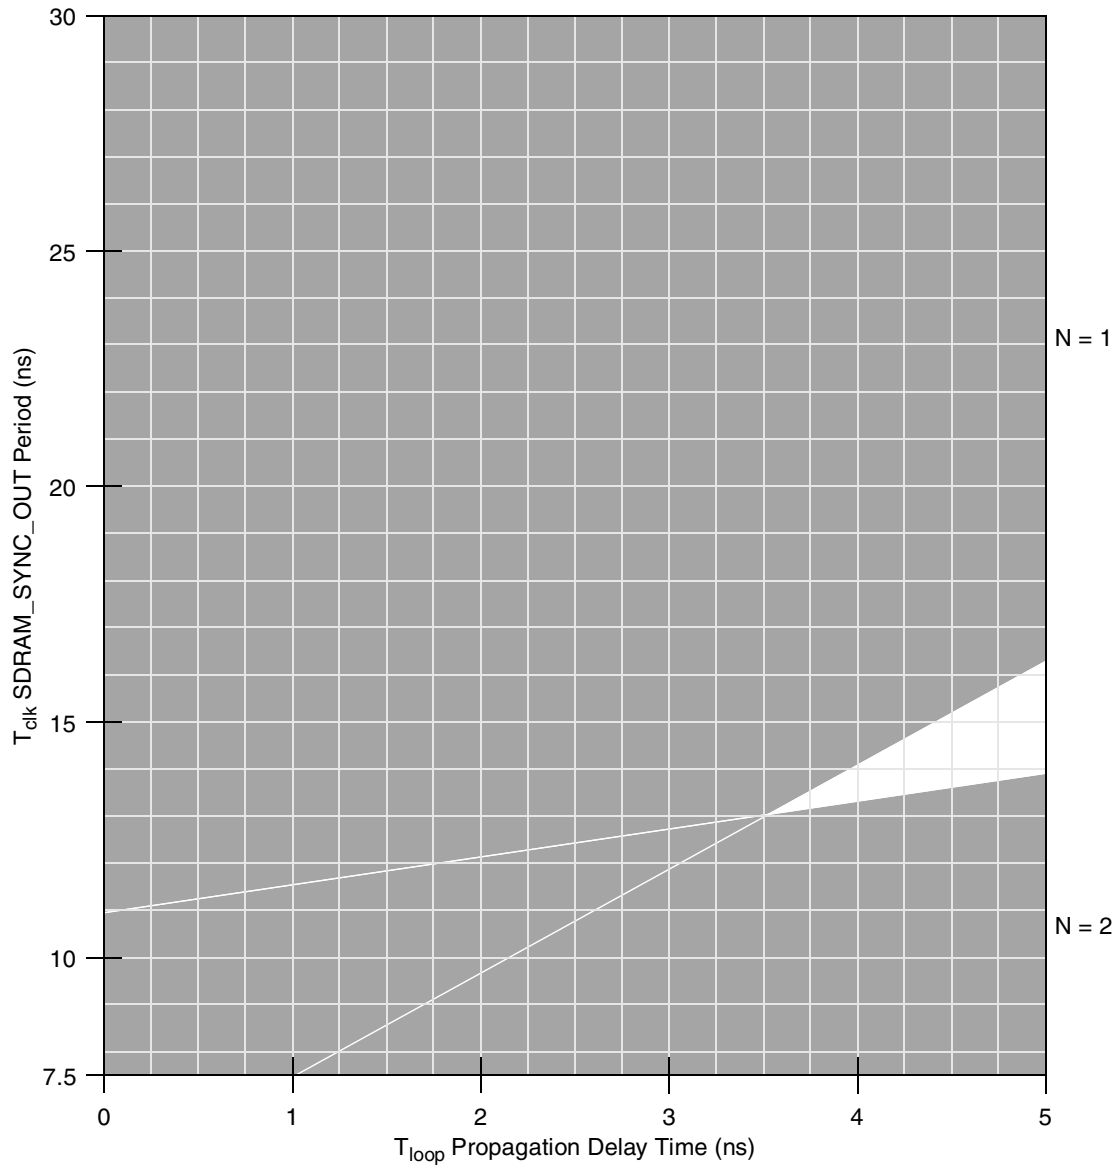


Figure 10. DLL Locking Range Loop Delay vs. Frequency of Operation for DLL\_Extend = 1 and Max Tap Delay

## 6 PLL Configuration

The MPC8245 internal PLLs are configured by the PLL\_CFG[0:4] signals. For a given PCI\_SYNC\_IN (PCI bus) frequency, the PLL configuration signals set both the peripheral logic/memory bus PLL (VCO) frequency of operation for the PCI-to-memory frequency multiplying and the MPC603e CPU PLL (VCO) frequency of operation for memory-to-CPU frequency multiplying. The PLL configurations for the 400-MHz parts are shown in [Table 18](#).

**Table 18. PLL Configurations for the 400-MHz Part Offering**

| Ref        | PLL_CFG [0:4] <sup>11,14,15</sup> | 400-MHz Part <sup>9</sup>                              |  |                       | Multipliers          |                      |
|------------|-----------------------------------|--|--|-----------------------|----------------------|----------------------|
|            |                                   | PCI Clock Input (PCI_SYNC_IN) Range <sup>1</sup> (MHz) | Periph Logic/Mem Bus Clock Range (MHz) | CPU Clock Range (MHz) | PCI-to-Mem (Mem VCO) | Mem-to-CPU (CPU VCO) |
| 0          | 00000                             | 25–44 <sup>2</sup>                                     | 75–132                                 | 188–330               | 3 (2)                | 2.5 (2)              |
| 1          | 00001                             | 25–44 <sup>5</sup>                                     | 75–132                                 | 225–396               | 3 (2)                | 3 (2)                |
| 2          | 00010 <sup>13</sup>               | 50 <sup>9</sup> –66 <sup>1</sup>                       | 50–66                                  | 225–297               | 1 (4)                | 4.5 (2)              |
| 3          | 00011 <sup>16</sup>               | 50 <sup>8</sup> –66 <sup>1</sup>                       | 50–66                                  | 100–133               | 1 (Bypass)           | 2 (4)                |
| 4          | 00100                             | 25–46 <sup>4</sup>                                     | 50–92                                  | 100–184               | 2 (4)                | 2 (4)                |
| 6          | 00110 <sup>17</sup>               | Bypass   |  |                       | Bypass               | Bypass               |
| 7 (Rev. B) | 00111                             | 60 <sup>6</sup> –66 <sup>1</sup>                       | 60–66                                  | 180–198               | 1 (Bypass)           | 3 (2)                |
| 7 (Rev. D) | 00111 <sup>13</sup>               | 25–28 <sup>5</sup>                                     | 100–112                                | 350–392               | 4 (2)                | 3.5 (2)              |
| 8          | 01000                             | 60 <sup>6</sup> –66 <sup>1</sup>                       | 60–66                                  | 180–198               | 1 (4)                | 3 (2)                |
| 9          | 01001                             | 45 <sup>6</sup> –66 <sup>1</sup>                       | 90–132                                 | 180–264               | 2 (2)                | 2 (2)                |
| A          | 01010                             | 25–44 <sup>5</sup>                                     | 50–88                                  | 225–396               | 2 (4)                | 4.5 (2)              |
| B          | 01011                             | 45 <sup>3</sup> –66 <sup>1</sup>                       | 68–99                                  | 204–297               | 1.5 (2)              | 3 (2)                |
| C          | 01100                             | 36 <sup>6</sup> –46 <sup>4</sup>                       | 72–92                                  | 180–230               | 2 (4)                | 2.5 (2)              |
| D          | 01101                             | 45 <sup>3</sup> –66 <sup>1</sup>                       | 68–99                                  | 238–347               | 1.5 (2)              | 3.5 (2)              |
| E          | 01110                             | 30 <sup>6</sup> –46 <sup>4</sup>                       | 60–92                                  | 180–276               | 2 (4)                | 3 (2)                |
| F          | 01111                             | 25–38 <sup>5</sup>                                     | 75–114                                 | 263–399               | 3 (2)                | 3.5 (2)              |
| 10         | 10000                             | 30–44 <sup>2</sup>                                     | 60–132                                 | 180–264               | 3 (2)                | 2 (2)                |
| 11         | 10001                             | 25–33 <sup>2</sup>                                     | 100–132                                | 250–330               | 4 (2)                | 2.5 (2)              |
| 12         | 10010                             | 60 <sup>6</sup> –66 <sup>1</sup>                       | 90–99                                  | 180–198               | 1.5 (2)              | 2 (2)                |
| 13         | 10011                             | 25–33 <sup>5</sup>                                     | 100–132                                | 300–396               | 4 (2)                | 3 (2)                |
| 14         | 10100                             | 26 <sup>6</sup> –47 <sup>4</sup>                       | 52–94                                  | 182–329               | 2 (4)                | 3.5 (2)              |
| 15         | 10101                             | 27 <sup>3</sup> –40 <sup>5</sup>                       | 68–100                                 | 272–400               | 2.5 (2)              | 4 (2)                |
| 16         | 10110                             | 25–46 <sup>4</sup>                                     | 50–92                                  | 200–368               | 2 (4)                | 4 (2)                |

Table 18. PLL Configurations for the 400-MHz Part Offering (continued)

| Ref         | PLL_CFG<br>[0:4] <sup>11,14,15</sup> | 400-MHz Part <sup>9</sup>                                       |  |                             | Multipliers             |                         |
|-------------|--------------------------------------|---|--|-----------------------------|-------------------------|-------------------------|
|             |                                      | PCI Clock Input<br>(PCI_SYNC_IN)<br>Range <sup>1</sup><br>(MHz) | Periph<br>Logic/Mem<br>Bus Clock<br>Range<br>(MHz) | CPU Clock<br>Range<br>(MHz) | PCI-to-Mem<br>(Mem VCO) | Mem-to-CPU<br>(CPU VCO) |
| 17          | 10111                                | 25–33 <sup>2</sup>  | 100–132  | 200–264                     | 4 (2)                   | 2 (2)                   |
| 18          | 11000                                | 27 <sup>3</sup> –53 <sup>5</sup>                                | 68–132   | 204–396                     | 2.5 (2)                 | 3 (2)                   |
| 19          | 11001                                | 36 <sup>6</sup> –66 <sup>1</sup>                                | 72–132   | 180–330                     | 2 (2)                   | 2.5 (2)                 |
| 1A          | 11010                                | 50 <sup>9</sup> –66 <sup>1</sup>                                | 50–66  | 200–264                     | 1 (4)                   | 4 (2)                   |
| 1B          | 11011 <sup>13</sup>                  | 34 <sup>3</sup> –66 <sup>1</sup>                                | 68–132   | 204–396                     | 2 (2)                   | 3 (2)                   |
| 1C          | 11100                                | 44 <sup>6</sup> –66 <sup>1</sup>                                | 66–99  | 198–297                     | 1.5 (2)                 | 3 (2)                   |
| 1D          | 11101                                | 48 <sup>6</sup> –66 <sup>1</sup>                                | 72–99  | 180–248                     | 1.5 (2)                 | 2.5 (2)                 |
| 1E (Rev. B) | 11110 <sup>10</sup>                  | Not usable  |  |                             | Off                     | Off                     |
| 1E (Rev. D) | 11110                                | 33 <sup>3</sup> –57 <sup>5</sup>                                | 66–114   | 231–399                     | 2 (2)                   | 3.5 (2)                 |
| 1F          | 11111 <sup>10</sup>                  | Not usable  |  |                             | Off                     | Off                     |

**Notes:**

- Limited by maximum PCI input frequency (66 MHz).
- Limited by maximum system memory interface operating frequency (133 MHz).
- Limited by minimum memory VCO frequency (132 MHz).
- Limited due to maximum memory VCO frequency (372 MHz).
- Limited by maximum CPU operating frequency (400 MHz).
- Limited by minimum CPU VCO frequency (360 MHz).
- Limited by maximum CPU VCO frequency (800 MHz).
- Limited by minimum CPU operating frequency (100 MHz).
- Limited by minimum memory bus frequency (50 MHz).
- In clock off mode, no clocking occurs inside the MPC8245, regardless of the PCI\_SYNC\_IN input.
- Range values are shown rounded down to the nearest whole number (decimal place accuracy removed) for clarity.
- PLL\_CFG[0:4] settings that are not listed are reserved.
- Multiplier ratios for this PLL\_CFG[0:4] setting are different from the MPC8240 and are not backwards-compatible.
- PCI\_SYNC\_IN range for this PLL\_CFG[0:4] setting is different from the MPC8240 and may not be fully backwards-compatible.
- Bits 7–4 of register offset <0xE2> contain the PLL\_CFG[0:4] setting value.
- In PLL bypass mode, the PCI\_SYNC\_IN input signal clocks the internal processor directly, the peripheral logic PLL is disabled, and the bus mode is set for 1:1 (PCI:Mem) mode operation. This mode is intended for hardware modeling support. The AC timing specifications given in this document do not apply in the PLL bypass mode.
- In dual PLL bypass mode, the PCI\_SYNC\_IN input signal clocks the internal peripheral logic directly, the peripheral logic PLL is disabled, and the bus mode is set for 1:1 (PCI\_SYNC\_IN:Mem) mode operation. In this mode, the OSC\_IN input signal clocks the internal processor directly in 1:1 (OSC\_IN:CPU) mode operation, and the processor PLL is disabled. The PCI\_SYNC\_IN and OSC\_IN input clocks must be externally synchronized. This mode is intended for hardware modeling support. The AC timing specifications given in this document do not apply in the dual PLL bypass mode.

## 9 Ordering Information

Ordering information for the parts covered in this document is provided in [Section 9.1, “Part Numbers Fully Addressed by This Document.”](#) [Section 9.3, “Part Marking,”](#) addresses the marking specifications.

### 9.1 Part Numbers Fully Addressed by This Document

[Table 21](#) provides the ordering information for the MPC8245 parts described herein. Note that the individual part numbers correspond to a maximum processor core frequency.

**Table 23. Part Numbers Addressed by This Document.**


| <b>MPC</b>          | <b>nnnn</b>            | <b>X</b>                              | <b>X</b>                  | <b>xx</b>                           | <b>nnn</b>                             | <b>x</b>              |   |
|---------------------|------------------------|---------------------------------------|---------------------------|-------------------------------------|--|-----------------------|---|
| <b>Product Code</b> | <b>Part Identifier</b> | <b>Process<sup>3</sup> Identifier</b> | <b>Process Descriptor</b> | <b>Package<sup>1</sup></b>          | <b>Processor Frequency<sup>2</sup></b> | <b>Revision Level</b> | <b>Processor Version Register Value</b> |
| MPC                 | 8245                   | A                                     | R: 0° to 85°C             | ZU = TBGA<br>V V= Lead-free<br>TBGA | 400 MHz<br>2.1 V ± 100 mV              | D:1.4 Rev ID:0x14     | 0x80811014                              |

**Notes:**

1. See [Section 5, “Package Description,”](#) for more information on available package types.
2. Processor core frequencies supported by parts addressed by this specification only. Not all parts described in this specification support all core frequencies. Additionally, parts addressed by part number specifications may support other maximum core frequencies.
3. Process identifier ‘A’ represents parts that are manufactured under a 29-angstrom process versus the original 35-angstrom process.

## 9.3 Part Marking

Parts are marked as in the example shown in [Figure 33](#).



**Notes:**

- MMMMMM is the 6-digit mask number.
- ATWLYYWW is Test traceability code.
- YWWLAZ is the Assembly traceability code.
- CCCCC is the country code.

**Figure 33. Freescale Part Marking for TBGA Device**

## 2 Document Revision History

[Table B](#) provides a revision history for this part number specification.

**Table B Document Revision History**

| Rev. No. | Date     | Substantive Change(s)   |
|----------|----------|---|
| 3        | 12/05    | <ul style="list-style-type: none"> <li>• Changed Document ID from MPC8245ARUPNS to MPC8245ECS02AD.</li> <li>• Changed title of document from <i>MPC8245 Part Number Specification for the MPC8245ARZUxxx Series</i> to the <i>MPC8245 Hardware Specification Addendum for the MPC8245ARXXnnnx Series</i>.</li> <li>• <a href="#">Table A</a> and <a href="#">Table 23</a> were updated to reflect current part offerings for the part.</li> <li>• Removed Section 2, “Features” and Section 3, “.General Parameters.”</li> <li>• Added Section 4, “Electrical and Thermal Characteristics.” heading and introduction.</li> <li>• Remove all 466 MHz specific information as this part is not available for new orders. Section 4.3.3 was removed because it was specific to the 466 MHz part.</li> <li>• <a href="#">Figure 33</a> was updated to reflect current part marking format.</li> </ul> |
| 2        | 07/12/04 | <ul style="list-style-type: none"> <li>• Updated to Freescale template.</li> <li>• Updated section numbers to accurately reflect hardware specifications sections.</li> <li>• Changed junction temperature range in Table 1 to reflect range depicted in Table A (0° to 85°C).</li> <li>• Added Section 4.3.1 to illustrate DLL locking graphs for 29 angstrom parts (400- and 466-MHz parts).</li> </ul>   |
| 1.0      |          | <ul style="list-style-type: none"> <li>• Added to list of parts covered by this document, including the non-A process identifier parts. Updated <a href="#">Table A</a> and <a href="#">Table 20</a>.</li> <li>• Nontechnical reformatting.</li> </ul>  |
| 0.1      |          | Minor edit to part number.  |
| 0        |          | Original release.   |

**THIS PAGE INTENTIONALLY LEFT BLANK**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## **How to Reach Us:**

### **Home Page:**

www.freescale.com

### **email:**

support@freescale.com

### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor  
Technical Information Center, CH370  
1300 N. Alma School Road  
Chandler, Arizona 85224  
(800) 521-6274  
480-768-2130  
support@freescale.com

### **Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
support@freescale.com

### **Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku  
Tokyo 153-0064, Japan  
0120 191014  
+81 2666 8080  
support.japan@freescale.com

### **Asia/Pacific:**

Freescale Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate,  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
support.asia@freescale.com

### **For Literature Requests Only:**

Freescale Semiconductor  
Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
(800) 441-2447  
303-675-2140  
Fax: 303-675-2150  
LDCForFreescaleSemiconductor  
@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. The described product contains a PowerPC processor core. The PowerPC name is a trademark of IBM Corp. and used under license. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc., 2005.

Document Number: MPC8245ECS02AD  
Rev. 3  
12/2005

