


20 Amp Schottky Barrier Rectifiers

FST2035 — FST2045

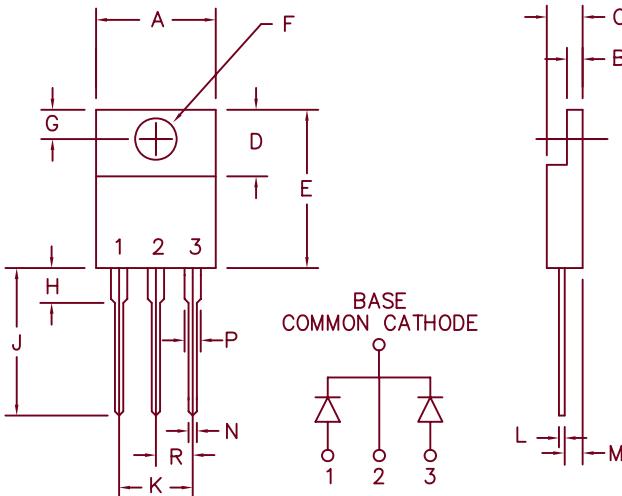

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.161	3.53	4.09	
G	.100	.135	2.54	3.43	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.022	.357	.559	
M	.080	.115	2.03	2.92	
N	.015	.040	.380	1.02	
P	.045	.070	1.14	1.78	
R	.090	.110	2.29	2.79	

PLASTIC TO-220AB

Microsemi Catalog Number	Industry Part Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
FST2035	12CTQ035,15CTQ035 20CTQ035 MBR1535CT,MBR2035CT	35V	35V
FST2040	12CTQ040,15CTQ040 20CTQ040 MBR1540CT,MBR2040CT	40V	40V
FST2045	12CTQ045,15CTQ045 20CTQ045 MBR1545CT,MBR2045CT MBR1545CTP,MBR2045CTP	45V	45V

- Schottky barrier rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- V_{RRM} 35 to 45 Volts

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Peak Reverse Current per leg
Typical Junction Capacitance

$I_F(AV)$ 20 Amps
 $I_F(AV)$ 10 Amps
 I_{FSM} 225 Amps
 V_{FM} .48 Volts
 V_{FM} .65 Volts
 I_{RM} 10 mA
 I_{RM} 250 μ A
 C_J 660 pF

$T_C = 160^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.2^\circ\text{C}/\text{W}$
 $T_C = 160^\circ\text{C}$, Square wave, $R_{\theta JC} = 2.4^\circ\text{C}/\text{W}$
8.3ms, half sine, $T_J = 175^\circ\text{C}$
 $I_{FM} = 10\text{A}$, $T_J = 175^\circ\text{C}$ *
 $I_{FM} = 10\text{A}$, $T_J = 25^\circ\text{C}$ *
 V_{RRM} , $T_J = 125^\circ\text{C}$ *
 V_{RRM} , $T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}$, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	-55°C to 175°C
Operating junction temp range	TJ	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	2.4°C/W
Max thermal resistance per pkg.	$R_{\theta JC}$	1.2°C/W
Mounting torque		15 inch pounds maximum (6-32 screw)
Weight		.08 ounces (2.3 grams) typical



SCOTTSDALE
8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-17-07 Rev. 3

FST2035 – FST2045

Figure 1
Typical Forward Characteristics – Per Leg

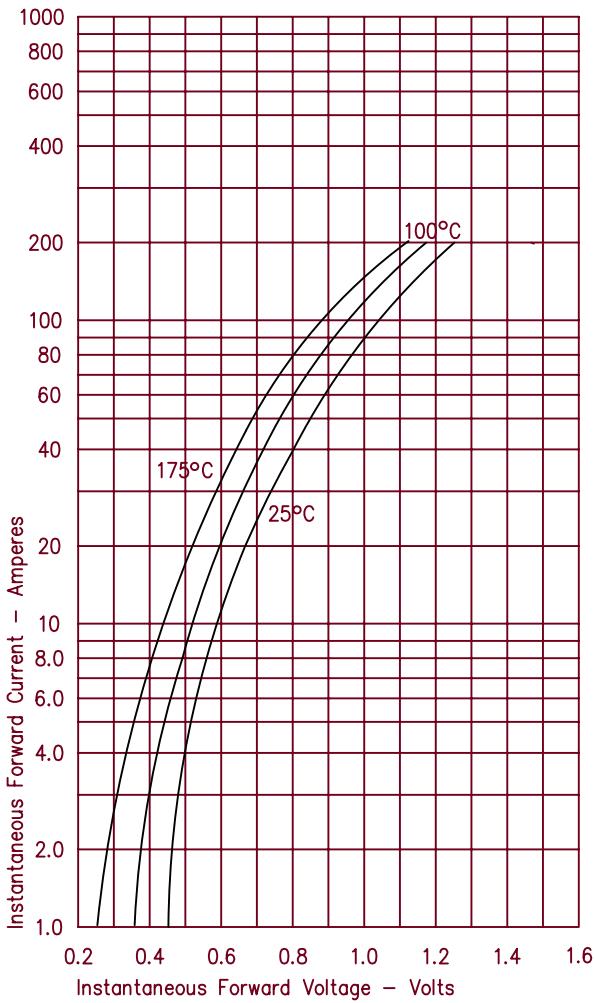


Figure 2
Typical Reverse Characteristics – Per Leg

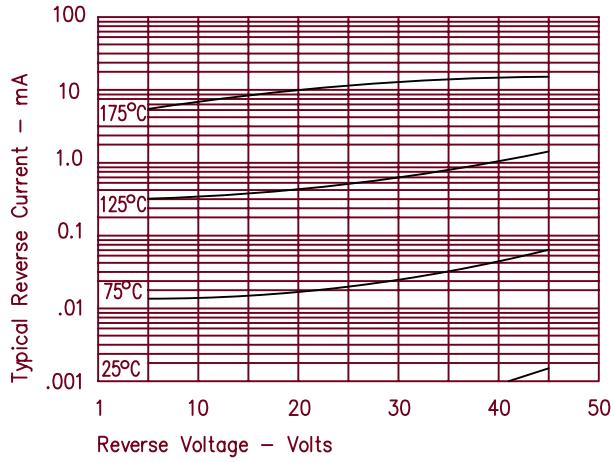


Figure 3
Typical Junction Capacitance – Per Leg

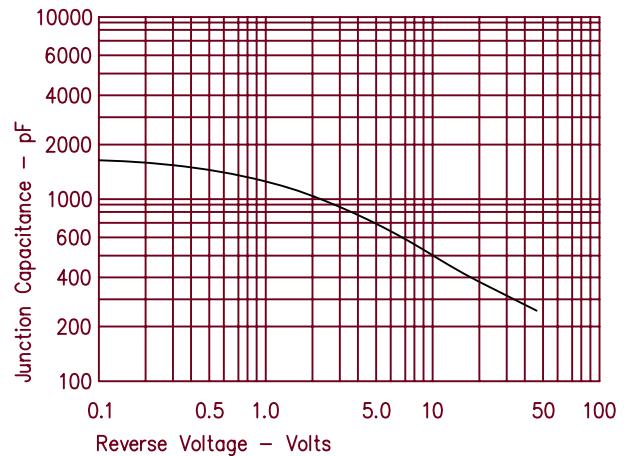


Figure 4
Forward Current Derating – Per Leg

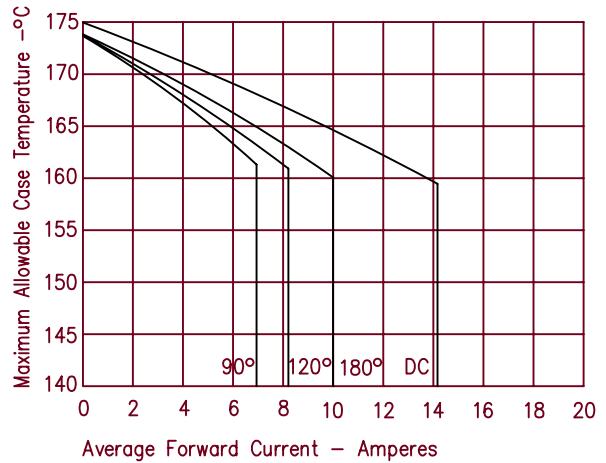


Figure 5
Maximum Forward Power Dissipation – Per Leg

