


积层贴片陶瓷片式电容器

CNC5L1X7R1H225K160AE

RoHS Reach Halogen Free Pb Free

| | |
|------|---|
| 交货型号 | CNC5L1X7R1H225KT***A |
| 用途 | 一般等级 车载用途时为 CNA5L1X7R1H225K160AE 。 |
| 特点 | 树脂电极品 低电阻 |
| 系列 | CNC5 (3216) [EIA 1206] |
| 状态 | 量产体制 |

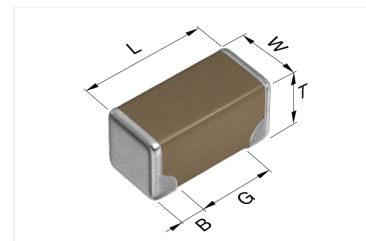

尺寸

| | |
|------------|-----------------------|
| 长度(L) | 3.20mm +0.30, -0.20mm |
| 宽度(W) | 1.60mm +0.30, -0.20mm |
| 厚度(T) | 1.60mm +0.30, -0.20mm |
| 端子宽度(B) | 0.30mm Min. |
| 端子间隔(G) | 1.00mm Min. |
| 推荐焊盘布局(PA) | 2.00mm to 2.40mm |
| 推荐焊盘布局(PB) | 1.00mm to 1.20mm |
| 推荐焊盘布局(PC) | 1.10mm to 1.60mm |

电气特性

| | |
|-------------|-----------------------|
| 电容 | 2.2 μ F \pm 10% |
| 额定电压 | 50VDC |
| 温度特性 | X7R (\pm 15%) |
| 耗散因数 (Max.) | 5% |
| 绝缘电阻 (Min.) | 227M Ω |

其他

| | |
|----------|----------------|
| 焊接方法 | 回流 |
| AEC-Q200 | NO |
| 包装形式 | 塑封编带 (180mm卷筒) |
| 包装个数 | 2000pcs |

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

特性图表 (这是参考数据，并不保证产品的特性。)

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

