


交货型号	60736YP501K4EAAU
用途	配电线用
特点	铸模
系列	FD
状态	量产体制

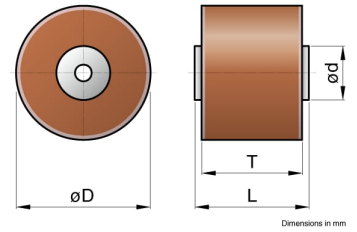

## 尺寸

D	48.00mm ±1.00mm
L	38.50mm ±1.00mm
T	34.50mm ±2.00mm
d	15.00mm ±0.50mm
螺纹规格	ISO M5

## 电气特性

电容	500pF ±10%
额定电压	25kVAC
耐电压 (Nom.)	40kVAC
部分放电开始电压 [3pC] (Min.)	32kVAC
雷电冲击耐受电压 (Min.)	
温度特性	Y5P (±10%)
耗散因数 (Max.)	0.3%
绝缘电阻 (Min.)	10000MΩ

## 其他

使用温度范围	-30~85° C
保存温度范围	-30~85° C
包装形式	箱装
重量	

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.