


用途	车载等级
特点	<b>AEC-Q200</b> AEC-Q200
Product Type	玻璃封装型 NTC热敏电阻
Terminal Shape	径向引线(轴向U型弯曲) 轴向引线
系列	NTCDA
状态	量产体制
品牌	TDK

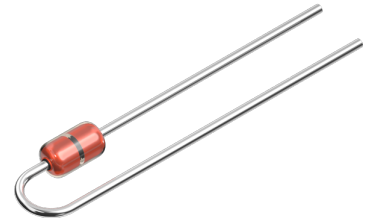

### 尺寸

长度(L)	3.00mm +0.00, -0.70mm
Diameter(D)	1.80mm Max.
Terminal Length	16.00mm ±1.00mm
Terminal Diameter	0.45mm Max.

### 电气特性

Nominal Resistance	2.186k $\Omega$ at 25° C
Nominal Resistance Tolerance	±3%
Reference Resistance	2.186k $\Omega$ at 25° C
Nominal B value (Typ.) [0/100° C]	3366K
Nominal B value Tolerance	±2%
Reference B value (Typ.) [25/85° C]	3392K
Reference B value (Typ.) [25/100° C]	3398K
最大电力 [at 25° C]	10mW
热辐射常数 [at 25° C]	1mW/° C

### 其他

使用温度范围	-40~250° C
Terminal Note	Ni 镀层
UL文件No.	
AEC-Q200	YES
包装形式	
包装个数	200pcs
重量	0.056g

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.