

Automotive and Industrial Qualified Bluetooth Low Energy Wireless MCUs

# Kinetis® KW36/35/34 Bluetooth 5 Wireless MCUs with Integrated CAN/ CAN FD and LIN Bus

Kinetis KW36/35/34 wireless MCUs feature AEC-Q100 Grade 2 or industrial qualification and the latest Bluetooth technology for superior durability and performance in automotive, industrial and healthcare applications.

# **OVERVIEW**

Based on the Arm® Cortex®-M0+ core, the Kinetis KW36/35/34 wireless MCUs integrates a Bluetooth Low Energy version 5 and Generic FSK radio. The radio supports up to 8 simultaneous secure connections in any master/slave combination allowing multiple authorized users to communicate with the device.

Additionally, the Kinetis KW36 MCU exclusively integrates FlexCAN, enabling seamless integration into an automobile's in-vehicle or industrial CAN communication network. The FlexCAN module can support CAN's flexible data rate (CAN FD) for increased bandwidth and lower latency.

# TARGET APPLICATIONS

# Automotive

- ▶ Car access
- Car sharing
- ▶ Passive entry/passive start (PEPS) systems
- ▶ Tire pressure measurement sensors (TPMS) systems
- ▶ Wireless onboard diagnostic functions


#### Industrial

- ▶ Building control and monitoring
- ▶ Fire and safety

## Healthcare

- ▶ Home and institutional healthcare
- ▶ Patient monitoring

# KINETIS KW36/35/34 WIRELESS MCU FAMILY BLOCK DIAGRAM

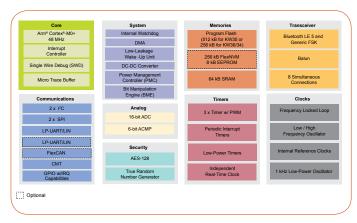



#### **FEATURES**

All MCUs in this family contain an integrated buck DC-DC converter that supports operating voltages from 2.1-3.6 V and significantly reduces the peak current in receive and transmit modes to extend the useful life of a battery. At the same time, this family delivers an excellent link budget that ensures the longest range of communication and a high immunity to interference.

This family has up to 512 kB Flash memory with ECC and 64 kB SRAM allowing plenty of space for protocol stacks, application profiles and custom user firmware. In addition, the radio can provide the necessary information in order to accurately estimate the distance (ranging) of a remote Bluetooth LE device to determine its position.

For automotive applications, Kinetis KW36A/35A/34A devices are AEC-Q100 Grade 2 qualified and are provided in 6 mm x 6 mm 40HVQFN and 7 mm x 7 mm 48HVQFN packages with "wettable" flank package technology enabling optical inspection of soldering, reducing cost and increasing reliability.

#### **ENABLEMENT**

Take advantage of the robust enablement package that includes the fully certified Bluetooth LE 5 host and controller stacks, Bluetooth LE application profiles in source, generic FSK software protocol, RTOS, development tools and IDEs. These tools are designed for use with Kinetis KW36/35/34 MCUs and are fully integrated in the MCUXpresso software and tools suite.

#### KINETIS KW36/35/34 WIRELESS MCU FAMILYFEATURES AND BENEFITS

| Features   | Benefits   |  |  |
|--|--|--|--|
| Bluetooth® LE 5 with 8 simultaneous connections              | Supports simultaneous secure connections in any master/slave combination   |  |  |
| connections  | Keeps all connections alive for continuous monitoring  |  |  |
| 6.3 mA typical Rx and 5.7 mA Tx current with DC-DC activated | Significantly reduces power consumption and extends battery life   |  |  |
| -95 dBm typical BLE sensitivity                              | High link budget improves range and lowers cost by reducing  |  |  |
| -99 dBm typical generic FSK (at 250 kbit/s)                  | the need for external power amplifiers   |  |  |
| sensitivity  | Integrated balun enables smaller design and reduces system   |  |  |
| +5 dBm maximum output power                                  | costs  |  |  |
| Excellent selectivity and blocking                           | Significantly improves operation in harsh 2.4 GHz environments   |  |  |
| 48 MHz Arm® Cortex®-M0+ core                                 |  |  |  |
| Up to 512 kB flash memory with ECC                           | High-performance, low-power core with adequate memory to   |  |  |
| 64 kB SRAM   | run Bluetooth LE, generic FSK protocol stacks and application  |  |  |
| AES-128 accelerator  | Fast encryption/decryption utilizing hardware security   |  |  |
| True random number generator                                 | algorithms for network commissioning and transmissions of supported protocols  |  |  |
| Buck DC-DC converter working from 2.1 V to 3.6 V             | Supports a wide range of batteries from coin-cell to Lithium-ion   |  |  |
| 16-bit analog-to-digital converter (ADC)                     | Supports high-performance on-chip analog at the MCU level  |  |  |
| 6-bit high-speed analog comparator (CMP)                     | for sensor aggregation and other sophisticated applications  |  |  |
| CAN/CAN FD and LIN Bus                                       | Enables easy integration into automotive in-vehicle and industrial networks  |  |  |
| 7 x 7 mm 48LQFN  | Smaller size and low component count reduces cost. The   |  |  |
| 6 x 6 mm "wettable" flanks 40HVQFN                           | wettable flanks package technology enable optical inspection of the soldering, reducing cost and increasing reliability. |  |  |
| 7 x 7 mm "wettable" flanks 48HVQFN                           |  |  |  |

# **PART NUMBERS**

| Part Number                                     | Qualification                          | CAN FD      | 2nd UART with LIN | 8kB EEPROM  | Package                           |
|---|--|-------------|-------------------|-------------|-----------------------------------|
| MKW36A512VFP4<br>MKW36Z512VFP4<br>MKW35A512VFP4 | Automotive<br>Industrial<br>Automotive | Y<br>Y<br>N | Y<br>Y<br>N       | Y<br>Y<br>N | 6 x 6 40-pin<br>Wettable<br>HVQFN |
| MKW36A512VHT4<br>MKW36Z512VHT4<br>MKW35Z512VHT4 | Automotive<br>Industrial<br>Industrial | Y<br>Y<br>N | Y<br>Y<br>N       | Y<br>Y<br>N | 7X7 48-pin<br>Laminate QFN        |
| MKW36A512VFT4<br>MKW35A512VFT4<br>MKW34A512VFT4 | Automotive<br>Automotive               | Y<br>N<br>N | Y<br>N<br>N       | Y<br>N<br>Y | 7 x 7 48-pin<br>Wettable<br>HVQFN |

## **DEVELOPMENT TOOLS**

| Board Name | Description  |
|------------|--|
| FRDM-KW36  | Freedom development board for Kinetis KW36/35 MCUs with 2.4 GHz Bluetooth® LE and generic FSK wireless connectivity and CAN/LIN connectivity solutions |
| USB-KW41Z  | USB dongle for sniffer operations for Kinetis wireless MCUs with 2.4 GHz Bluetooth LE and generic FSK  |

#### www.nxp.com/Wireless/KinetisKW36

NXP, the NXP logo and Kinetis are trademarks of NXP B.V. All other product or service names are the property of their respective owners. Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2017–2019 NXP B.V.