Current-Shunt Monitor, Voltage Output, Bi-Directional Zero-Drift

The NCS199A1, NCS199A2 and NCS199A3 are voltage output current shunt monitors that can measure voltage across shunts at common–mode voltages from –0.3 V to 26 V, independent of supply voltage. Three fixed gains are available: 50 V/V, 100 V/V or 200 V/V. The low offset of the zero–drift architecture enables current sensing with maximum drops across the shunt as low as 10 mV full–scale.

The devices can operate from a single +2.7 V to +26 V power supply, drawing a maximum of 100 μ A of supply current. All versions are specified over the extended operating temperature range (-40°C to +125°C).

Features

- Wide Common–Mode Input Range –0.3 V to 26 V
- Supply Voltage Range from 2.7 V to 26 V
- Low Offset Voltage ±150 μV Max
- Low Offset Drift (0.5 μ V/°C)
- Low Gain Error (max 1.5%)
- Rail-to-rail Input and Output Capability
- Low Current Consumption (typ 65 µA, 100 µA max)
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable
- These are Pb–free Devices

Typical Applications

- Current Sensing (High–Side/Low–Side)
- Automotive
- Telecom
- Sensors




ON Semiconductor®

www.onsemi.com

SC70-6 SQ SUFFIX CASE 419B

PIN CONNECTIONS



MARKING DIAGRAM



XXX = Specific Device Code (See page 4)

- M = Date Code
- = Pb–Free Package

(Note: Microdot may be in either location)

Product	Gain	R3-R4	R1-R2
NCS199A1	50	20 kΩ	1 MΩ
NCS199A2	100	10 kΩ	1 MΩ
NCS199A3	200	5 kΩ	1 MΩ

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT})GAIN + V_{REF}$$

ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 4 of this data sheet.

This document contains information on some products that are still under development. ON Semiconductor reserves the right to change or discontinue these products without notice.

© Semiconductor Components Industries, LLC, 2016 July, 2016 – Rev. 1

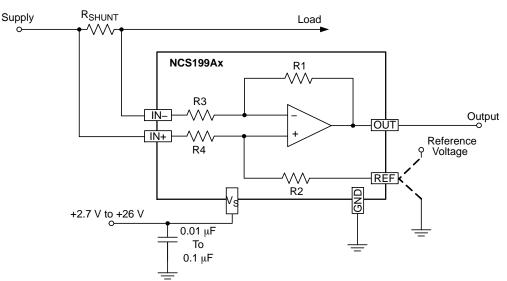


Figure 1. Application Schematic

Table 1. MAXIMUM RATINGS

Rating Supply Voltage (Note 1)		Symbol	Value	Unit V	
		V _S	+26		
Analog Inputs	Differential (V _{IN+})–(V _{IN} –)	V _{IN+} ,V _{IN-}	-26 to +26	V	
	Common–Mode (Note 2)		GND-0.3 to +26		
REF Input		V _{REF}	GND–0.3 to (V_{s}) +0.3	V	
Output (Note 2)		V _{OUT}	GND–0.3 to (V_{s}) +0.3	V	
Input Current into Any Pin (No	ote 2)		5	mA	
Maximum Junction Temperate	ure	T _{J(max)}	+150	°C	
Storage Temperature Range		TSTG	-65 to +150	°C	
ESD Capability, Human Body	Model (Note 3)	HBM	±3000	V	
ESD Capability, Machine Mod	del (Note 3)	MM	±100	V	
Charged Device Model (Note	3)	CDM	±1000	V	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for safe operating parameters.

2. Input voltage at any pin may exceed the voltage shown if current at that pin is limited to 5 mA.

3. This device series incorporates ESD protection and is tested by the following methods

ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)

ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)

ESD Charged Device Model tested per AEC–Q100–011.

Latchup Current Maximum Rating: 50 mA per JEDEC standard: JESD78

Table 2. THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal Characteristics, SC70 (Note 4) Thermal Resistance, Junction-to-Air (Note 5)	R_{\thetaJA}	250	°C/W

 Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for safe operating parameters.

5. Values based on copper area of 645 mm² (or 1 in²) of 1 oz copper thickness and FR4 PCB substrate.

Table 3. RECOMMENDED OPERATING RANGES

Rating	Symbol	Min	Max	Unit
Supply Voltage	VS	2.7	26	V
Ambient Temperature	T _A	-40	125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Table 4. ELECTRICAL CHARACTERISTICS

Boldface limits apply over the specified temperature range, $T_A = -40^{\circ}C$ to 125°C, guaranteed by characterization and/or design. At $T_A = +25^{\circ}C$, $V_{SENSE} = V_{IN+} - V_{IN-}$, $V_S = +5$ V, $V_{IN+} = 12$ V, and $V_{REE} = V_S/2$, unless otherwise noted.

Parameter		Test Conditions Sym		Min	Тур	Max	Unit	
GAIN								
NCS199A1 NCS199A2 NCS199A3			G		50 100 200		V/V	
Gain Error		$V_{SENSE} = -5 \text{ mV}$ to 5 mV	G _e		±0.2	±1.5	%	
Gain Error vs. Temp	perature	$T_A = -10^{\circ}C$ to $125^{\circ}C$		7	20	ppm/°0		
Nonlinearity Error		$V_{SENSE} = -5 \text{ mV}$ to 5 mV			±0.01		%	
Maximum Capacitive	e Load	No sustained oscillation			1		nF	
VOLTAGE OFFSET								
Offset Voltage	NCS199A1/2/3 NCV199A2	(RTI Note 6), V _{SENSE} = 0 mV	V _{OS}		±5.0 ±20	±150 ±200	μV	
Offset Drift NC	S199A2, NCS199A3 NCS199A1		δV/δΤ		0.1 0.5	0.6 2.0	μV/°C	
INPUT								
Input Bias Current		V _{SENSE} = 0 mV	I _{IB}			60	μΑ	
Common-Mode Inp	ut Voltage Range		V _{CM}	-0.3		26	V	
	NCS199A2, NCS199A3	$V_S = 5 V$, $V_{IN+} = 2 V$ to +26 V, $V_{SENSE} = 0 mV$	CMRR	100	115		dB	
		$V_S = 3.3 V$, $V_{IN+} = 3 V$ to +26 V, $V_{SENSE} = 0 mV$		100	115		dB	
		$V_{S} = 3.3 \text{ V}, V_{IN+} = 0 \text{ V} \text{ to } +26 \text{ V},$ $V_{SENSE} = 0 \text{ mV} (T_{A} = -10^{\circ}\text{C} \text{ to } 85^{\circ}\text{C})$		100	120		dB	
Common–Mode Rejection Ratio	NCS199A1	$V_S = 5 V$, $V_{IN+} = 2 V$ to +26 V, $V_{SENSE} = 0 mV$	CMRR	97	110		dB	
		$V_S = 3.3 V$, $V_{IN+} = 3 V$ to +26 V, $V_{SENSE} = 0 mV$		97	110		dB	
		$V_{S} = 3.3 \text{ V}, V_{IN+} = 0 \text{ V} \text{ to } +26 \text{ V},$ $V_{SENSE} = 0 \text{ mV} (T_{A} = -10^{\circ}\text{C} \text{ to } 85^{\circ}\text{C})$		97	115		dB	
Common–Mode Rejection Ratio	NCV199A2	$V_S = 5 V$, $V_{IN+} = 2 V$ to +26 V, $V_{SENSE} = 0 mV$	CMRR	95	115		dB	
		$V_S = 3.3 V$, $V_{IN+} = 3 V$ to +26 V, $V_{SENSE} = 0 mV$		95	115		dB	
		$V_{S} = 3.3 \text{ V}, V_{IN+} = 0 \text{ V} \text{ to } +26 \text{ V}, V_{SENSE} = 0 \text{ mV} (T_{A} = -10^{\circ}\text{C} \text{ to } 85^{\circ}\text{C})$		95	120		dB	
OUTPUT								
Output Voltage Low		Referenced from GND $R_L = 10 \text{ k}\Omega$ to Ground	V _{OL}		5	50	mV	
Output Voltage High		Referenced from V_S R_L = 10 k\Omega to Ground	V _{OH}		0.05	0.2	V	
DYNAMIC PERFOR	MANCE							
Bandwidth (f _{-3dB})		$C_{LOAD} = 10 \text{ pF}, \text{NCS199A1}$ $C_{LOAD} = 10 \text{ pF}, \text{NCS199A2}$	BW		100 60		kHz	
Claur Data		C_{LOAD} = 10 pF, NCS199A3	0.0		40			
Slew Rate			SR		0.4		V/μs	

Spectral Density, 1 kHz (RTI Note 6) 35 nV/√Hz en

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 6. RTI = referenced-to-input.

Table 4. ELECTRICAL CHARACTERISTICSBoldface limits apply over the specified temperature range, $T_A = -40^{\circ}C$ to 125°C, guaranteed by characterization and/or design.At $T_A = +25^{\circ}C$, $V_{SENSE} = V_{IN+} - V_{IN-}$, $V_S = +5$ V, $V_{IN+} = 12$ V, and $V_{REF} = V_S/2$, unless otherwise noted.

Parameter	Test Conditions	Symbol	Min	Тур	Max	Unit
POWER SUPPLY						
Operating Voltage Range	V _{SENSE} = 0 mV	Vs	2.7		26	V
Quiescent Current	V _{SENSE} = 0 mV	I _{DD} (65	100	μΑ
Quiescent Current over Temperature	V _{SENSE} = 0 mV				115	μΑ
Power Supply Rejection Ratio	V_{S} = +2.7 V to +26 V, V_{IN+} =18 V, V _{SENSE} = 0 mV	8 V, PSRR		±0.1	±10	μV/V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

6. RTI = referenced-to-input.

ORDERING INFORMATION


Device	Gain	Marking	Package	Shipping [†]		
NCS199A1SQT2G	50	ACQ				
NCS199A2SQT2G	100	ACR				
NCS199A3SQT2G	200	ACP	SC70–6 (Pb–Free)	3000 / Tape and Reel		
NCV199A2SQT2G* (In Development)**	100	TBD	(
NCV199A3SQT2G* (In Development)**	200	TBD				

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D

*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

** Contact local sales office for availability.

PACKAGE DIMENSIONS

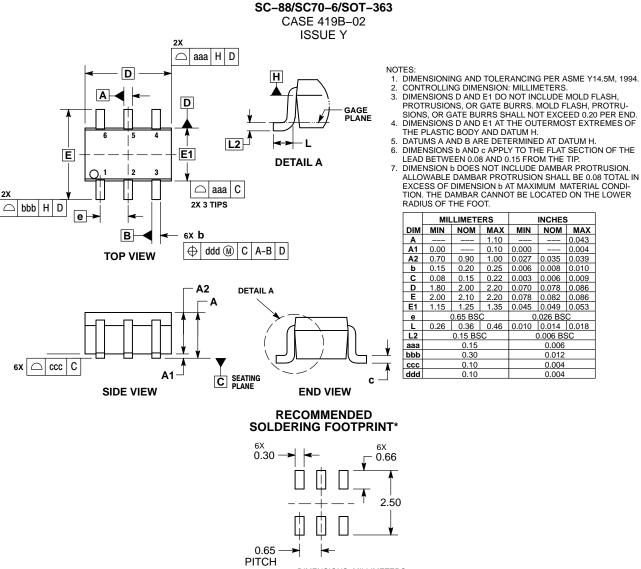

DIMENSIONS: MILLIMETERS

MILLIMETERS

MIN NOM MAX

2.00

0.65 BSC

0.15 BSC

0.15

0.30

0.10

0.10

0.00

0.70

0.15

0.08

1.80

2 00

0.26

1.10

0.10

2.20 0.070

0.90 1.00

0.36 0.46

0.000

0.20 0.25 0.006 0.008 0.010

0.15 0.22 0.003 0.006 0.009

2.10 2.20 0.078 0.082 0.086

1.15 1.25 1.35 0.045 0.049 0.053

0.027 0.035

INCHES MIN NOM MAX

0.078

0.026 BS

0.010 0.014 0.018

0.006 BSC

0.006

0.012

0.004

0.004

0.043 0.004

0.039

0.086

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and ware trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative