



## WIDE INPUT VOLTAGE RANGE, 200mA ULDO REGULATOR

### **Description**

The AP2205 series is a positive voltage regulator IC fabricated by high voltage EPNP process.

The AP2205 has features of wide input voltage range, high accuracy, high ripple rejection, low dropout voltage, low noise, current limit and ultra-low quiescent current which make it ideal for use in various USB and portable devices.

The IC consists of a voltage reference, an error amplifier, a resistor network for setting output voltage, a current limit circuit for current protection, and a chip enable circuit, a low power shutdown mode for extended battery life, over current protection, over temperature protection, as well as reversed-battery protection.


The AP2205 has 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 5.0V fixed voltage versions and adjustable voltage version.

The AP2205 is available in space-saving SOT25 and SOT89 packages.


#### **Features**

- Wide Input Voltage Range: 2.3V to 24V
- Wide Output Voltage Range: 1.24V to 22V
- Excellent Ripple Rejection: 60dB@ f = 1kHz
- Low Dropout Voltage: V<sub>DROP</sub> = 100mV@ I<sub>OUT</sub> = 100μA
- Low Ground Current
- High Output Voltage Accuracy
- Compatible with Low ESR Ceramic Capacitor
- Excellent Line/Load Regulation
- Thermal Shutdown Function
- Totally Lead-Free & Fully RoHS Compliant (Notes 2 & 3)
- Halogen and Antimony Free. "Green" Device (Note 4)

### **Pin Assignments**

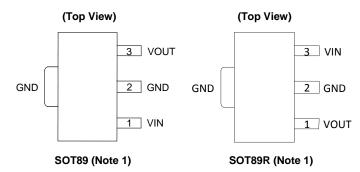

Note 1: The substrate/exposed pad should be connected to GND or open.




## **Applications**

- Battery-powered Equipment
- Laptop, Palmtops, Notebook Computers
- Portable Information Appliances
- Industrial/Automotive Applications

Notes: 2. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.


- 3. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 4. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


## **Typical Applications Circuit**

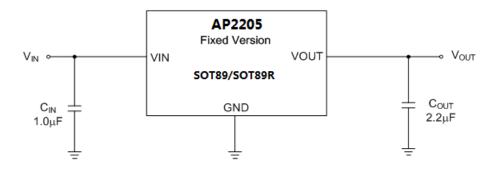




## **Typical Applications Circuit (Cont.)**

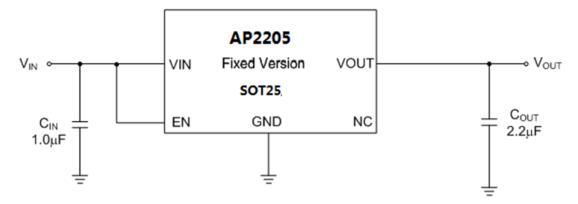


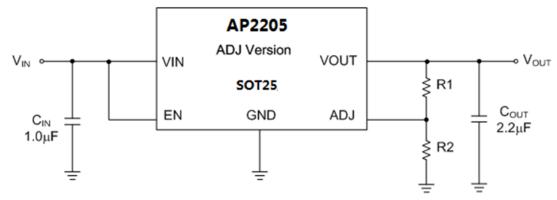

 $V_{OUT} = V_{REF}(1+(R1/R2))$ 

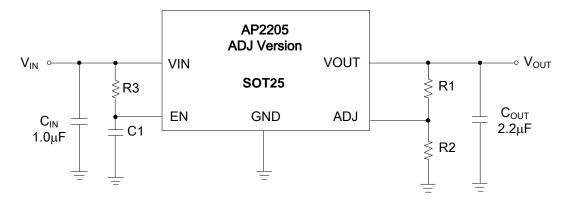

Startup Time Adjustable by External R3C1 Circuit

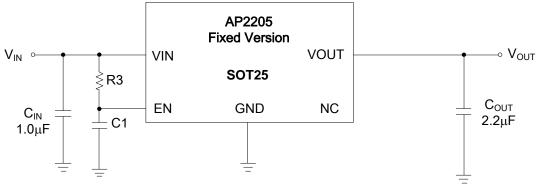


Startup Time Adjustable by External R3C1 Circuit




## **Pin Descriptions**

	Pin Number			
	SOT89	SOT89R	Pin Name	Function
SOT25	Y	YR		
1	1	3	VIN	Input voltage
2	2	2	GND	Ground
3	_	_	EN	Enable input
4	_	_	ADJ/NC	Adjust output for ADJ version/Not connected for fixed version
5	3	1	VOUT	Regulated output voltage

# **Functional Block Diagram**

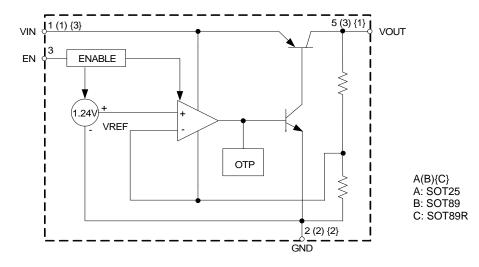



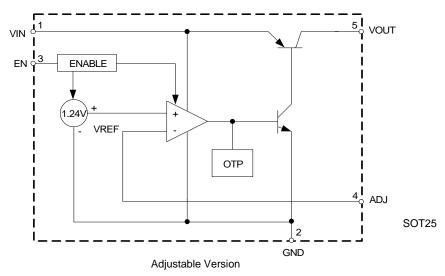



## **Absolute Maximum Ratings** (Note 5)

Symbol	Parameter Rating		Unit	
Vin	Supply Input Voltage	36		V
V <sub>CE</sub>	Enable Input Voltage	36		V
Іоит	Output Current	250	)	mA
T <sub>LEAD</sub>	Lead Temperature (Soldering, 10sec)	+26	60	°C
TJ	Operating Junction Temperature	+150		°C
		SOT25	160	
$\theta_{JA}$	Thermal Resistance (Note 6)	SOT89/SOT89R	129	°C/W
			29	
θις	Thermal Resistance	SOT89/SOT89R	26	°C/W
T <sub>STG</sub>	Storage Temperature Range	-65 to +150		°C
_	ESD (Charge Device Model) 1000		0	V
_	ESD (Human Body Model)		2000	

Notes:

# **Recommended Operating Conditions**

Symbol	Parameter	Min	Мах	Unit
V <sub>IN</sub>	Supply Input Voltage	2.3	24	V
TJ	Operating Junction Temperature	-40	+125	°C

<sup>5.</sup> Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

<sup>6.</sup>  $\theta_{JA}$  is measured with the component mounted on a 2-Layer FR-4 PCB board with 1.5cm\*1.5cm thermal sink pad in free air.



**Electrical Characteristics** (@V<sub>IN</sub> = V<sub>OUT</sub>+1V, T<sub>J</sub> = +25°C, I<sub>OUT</sub> = 100 $\mu$ A, C<sub>IN</sub> = 1.0 $\mu$ F, C<sub>OUT</sub> = 2.2 $\mu$ F, **Bold** typeface applies over -40°C  $\leq$  T<sub>J</sub>  $\leq$  +125°C, unless otherwise specified.)


Symbol	Parameter	Conc	litions	Min	Тур	Max	Unit
V <sub>оит</sub>	Output Voltage	Variation from Specified V <sub>OUT</sub>		V <sub>ОUТ</sub> ×98%	_	V <sub>OUT</sub> ×102%	V
$V_{REF}$	Reference Voltage	_		1.215	1.24	1.265	V
VIN	Input Voltage	_		2.3	_	24	V
I <sub>OUT(Max)</sub>	Maximum Output Current	V <sub>IN</sub> -V <sub>OUT</sub> = 1V, V <sub>O</sub>	оит = 98% × V <sub>ОИТ</sub>	200	250	_	mA
ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>	Line Regulation	$V_{OUT}+1V \le V_{IN} \le 2$	24V	_	0.05	_	%
ΔV <sub>ΟυΤ</sub> /V <sub>ΟυΤ</sub>	Load Regulation	1mA ≤ I <sub>OUT</sub> ≤ 200r	mA	_	0.5	_	%
		I <sub>OUT</sub> = 100μA		_	100	150	
		I <sub>OUT</sub> = 50mA		_	270	350	
$V_{DROP}$	Dropout Voltage (Note 7)	I <sub>OUT</sub> = 100mA	I <sub>OUT</sub> = 100mA			460	mV
			I <sub>OUT</sub> = 150mA		360	500	
		I <sub>OUT</sub> = 100μA		_	36	_	μΑ
		I <sub>OUT</sub> = 50mA		_	0.5	_	mA
I <sub>GND</sub>	Ground Current	I <sub>OUT</sub> = 100mA		_	1.3	_	
		I <sub>OUT</sub> = 150mA		_	2.5	_	
I <sub>STD</sub>	Standby Current	V <sub>IN</sub> = V <sub>OUT</sub> +1V V <sub>EN</sub> in OFF Mode		_	0.01	1.0	μΑ
DODD	Davies Comple Daio stics Dation	Ripple 0.5V <sub>P-P</sub>	f = 100Hz	_	60	_	4D
PSRR	Power Supply Rejection Ration	$V_{IN} = V_{OUT} + 1V$	f = 1kHz	_	60	_	dB
$\Delta V_{OUT}/(V_{OUT} \times \Delta T)$	Output Voltage Temperature Coefficient	$I_{OUT} = 100\mu A,$ -40°C $\leq T_J \leq +125$	°C	_	±100	_	ppm/°C
V <sub>NOI</sub>	RMS Output Noise	$T_J = +25^{\circ}C$ , $10Hz \le f \le 100kHz$		_	30	_	$\mu V_{rms}$
I <sub>ADJ</sub>	ADJ Pin Current	I <sub>OUT</sub> = 100μA		_	0.5	_	μΑ
I <sub>EN</sub>	EN Pin Current	V <sub>EN</sub> = V <sub>OUT</sub> +1V		_	3	_	μΑ
	EN "High" Voltage	EN Input Voltage	"High"	2.0			V
_	EN "Low" Voltage	EN Input Voltage	"Low"		_	0.4	V

Note 7: Dropout voltage is only valid when V<sub>OUT</sub> ≥ 2.3V because of the minimum input voltage limits.




### **Performance Characteristics**


### Output Voltage vs. Input Voltage




### **Output Voltage vs. Input Voltage**




#### Output Voltage vs. Temperature




#### **Output Voltage vs. Temperature**



#### **Output Voltage vs. Temperature**




#### **Output Voltage vs. Temperature**







#### **Output Voltage vs. Output Current**




#### **Output Voltage vs. Output Current**




### **Output Voltage vs. Output Current**




#### **Output Voltage vs. Output Current**



#### **Output Voltage vs. Output Current**




### **Output Voltage vs. Output Current**







#### **Dropout Voltage vs. Output Current**




## **Dropout Voltage vs. Temperature**




### Supply Current vs. Input Voltage




#### **Dropout Voltage vs. Output Current**



#### **Dropout Voltage vs. Temperature**





### **Supply Current vs. Input Voltage**







#### **Ground Current vs. Output Current**



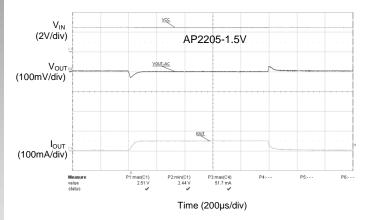


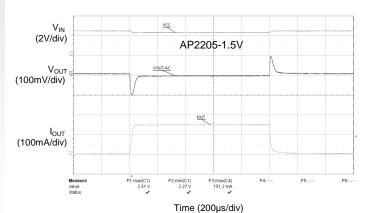


**Ground Current vs. Output Current** 




 $\label{eq:Load Transient} Load Transient \\ \mbox{(Conditions: $V_{\text{IN}}$=2.5V, $C_{\text{IN}}$=1.0$$\mu$F, $C_{\text{OUT}}$=2.2$$$\mu$F,} \\ \mbox{$I_{\text{OUT}}$=$1$$mA to $100$$mA)}$ 









#### **Enable Input Response**




# Adjustable Start-up Time by RC




### **Enable Input Response**

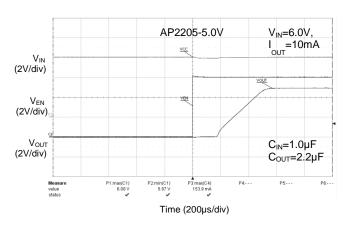


Adjustable Start-up Time by RC



#### **Maximum Output Current vs. Ambient Temperature**




Enable Pin Current vs. Enable Input Voltage






### **PSRR vs. Frequency**




### **PSRR vs. Frequency**





## **Ordering Information**

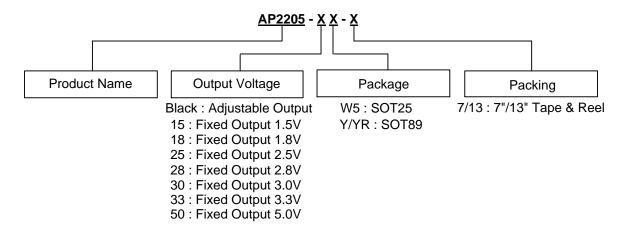

Part Number	Dookses Code	Deelrage	13"/7" Tape and Reel		
Part Number	Package Code	Package	Quantity	Part Number Suffix	
AP2205-XXY-13	Y	SOT89	2,500/Tape & Reel	-13	
AP2205-XXYR-13	YR	SOT89	2,500/Tape & Reel	-13	
AP2205-W5-7	W5	SOT25	3,000/Tape & Reel	-7	
AP2205-XXW5-7	W5	SOT25	3,000/Tape & Reel	-7	

## **Marking Information**

#### (1) SOT25

(Top View)

5 4

XX : Identification Code Y : Year 0 to 9

XX Y W X W: Week: A to Z: 1 to 26 week;

a to z : 27 to 52 week; z represents 52 and 53 week

1 2 3 <u>X</u>: Internal Code


Part Number	Package	Identification Code
AP2205-W5-7	SOT25	5A
AP2205-15W5-7	SOT25	5B
AP2205-18W5-7	SOT25	5C
AP2205-25W5-7	SOT25	5D
AP2205-28W5-7	SOT25	5E
AP2205-30W5-7	SOT25	5F
AP2205-33W5-7	SOT25	5G
AP2205-50W5-7	SOT25	5H



## Marking Information (Cont.)

(2) SOT89

## (Top View)



XX: Identification code

Y: Year: 0~9

<u>W</u>: Week: A~Z: 1~26 week;

a~z: 27~52 week;

z represents 52 and 53 week


X: Internal code

Part Number	Package	Identification Code
AP2205-15Y-13	SOT89	5B
AP2205-18Y-13	SOT89	5C
AP2205-25Y-13	SOT89	5D
AP2205-28Y-13	SOT89	5E
AP2205-30Y-13	SOT89	5F
AP2205-33Y-13	SOT89	5G
AP2205-50Y-13	SOT89	5H
AP2205-15YR-13	SOT89	6B
AP2205-18YR-13	SOT89	6C
AP2205-25YR-13	SOT89	6D
AP2205-28YR-13	SOT89	6E
AP2205-30YR-13	SOT89	6F
AP2205-33YR-13	SOT89	6G
AP2205-50YR-13	SOT89	6H



## Package Outline Dimensions (All dimensions in mm(inch).)


#### (1) Package Type: SOT25

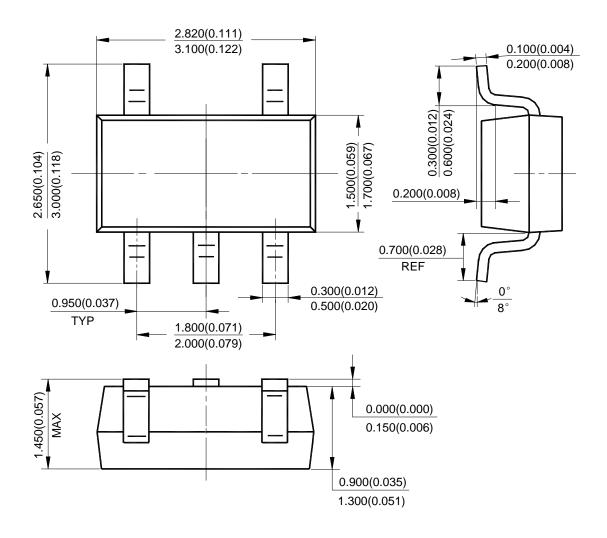





## Package Outline Dimensions (Cont. All dimensions in mm(inch).)

#### (2) Package Type: SOT89







Option 1


1.550(0.061)REF

1.030(0.041)REF

0.320(0.013)REF

2.210(0.087)REF


1.500(0.059)
1.800(0.071)





# **Suggested Pad Layout**

### (1) Package Type: SOT25

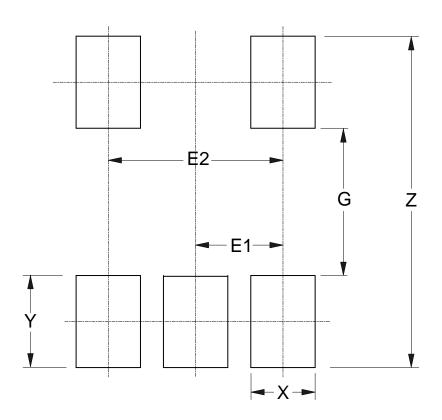


Dimensions	Z	G	X	Y	E1	E2
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	3.600/0.142	1.600/0.063	0.700/0.028	1.000/0.039	0.950/0.037	1.900/0.075



# Suggested Pad Layout (Cont.)

### (2) Package Type: SOT89

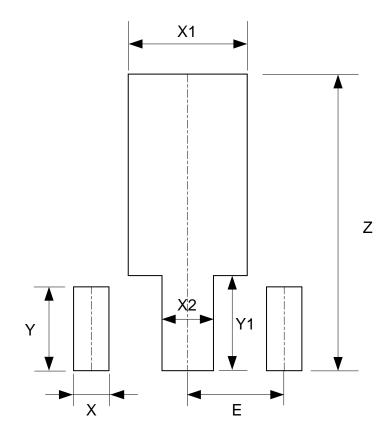

Dimensions	Z	X	X1	X2	Y	Y1	E
	(mm)/(inch)						
Value	4.600/0.181	0.550/0.022	1.850/0.073	0.800/0.031	1.300/0.051	1.475/0.058	1.500/0.059



#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

www.diodes.com