

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.


ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and



## BC337 / BC338 NPN Epitaxial Silicon Transistor

### Features

- Switching and Amplifier Applications
- Suitable for AF-Driver Stages and Low-Power Output Stages
- Complement to BC327 / BC328



### **Ordering Information**

Part Number	Top Mark	Package	Packing Method	
BC33716BU	BC33716	TO-92 3L	Bulk	
BC33716TA	BC33716	TO-92 3L	Ammo	
BC33716TFR	BC33716	TO-92 3L	Tape and Reel	
BC33725BU	BC33725	TO-92 3L	Bulk	
BC33725TA	BC33725	TO-92 3L	Ammo	
BC33725TAR	BC33725	TO-92 3L	Ammo	
BC33725TF	BC33725	TO-92 3L	Tape and Reel	
BC33725TFR	BC33725	TO-92 3L	Tape and Reel	
BC33740BU	BC33740	TO-92 3L	Bulk	
BC33740TA	BC33740	TO-92 3L	Ammo	
BC33825TA	BC33825	TO-92 3L	Ammo	

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}$ C unless otherwise noted.

Symbol	Parameter		Value	Unit
V <sub>CES</sub>	Collector-Emitter Voltage	BC337	50	
		BC338	30	V
V <sub>CEO</sub>	Collector-Emitter Voltage	BC337	45	V
		BC338	25	v
V <sub>EBO</sub>	Emitter-Base Voltage		5	V
۱ <sub>C</sub>	Collector Current (DC)		800	mA
ТJ	Junction Temperature		150	°C
T <sub>STG</sub>	Storage Temperature		-55 to 150	°C

© 2002 Fairchild Semiconductor Corporation BC337 / BC338 Rev. 1.5 September 2015

www.fairchildsemi.com

### Thermal Characteristics<sup>(1)</sup>

Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.

Symbol	Parameter	Value	Unit
Б	Power Dissipation	625	mW
PD	Derate Above 25°C	5.0	mW/°C
R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	200	°C/W

Note:

1. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.


### **Electrical Characteristics**

Values are at  $T_A = 25^{\circ}C$  unless otherwise noted.


Symbol	Parameter		Conditions	Min.	Тур.	Max.	Unit
BV <sub>CEO</sub>	Collector-Emitter $BC337$ Desclutions Visite as $I_{C} = 10 \text{ mA}, I_{B} = 0$	45			V		
DVCEO	Breakdown Voltage	BC338	338 IC = 10 IIIA, IB = 0				v
BV <sub>CES</sub>	Collector-Emitter	BC337	$1 - 0.1 m \Lambda V = 0$				V
DVCES	Breakdown Voltage	BC338 $I_{C} = 0.1 \text{ mA}, V_{BE} = 0$		30			
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage		$I_{E} = 0.1 \text{ mA}, I_{C} = 0$	5			V
	Collector Cut-Off Current	BC337	$V_{CE} = 45 \text{ V}, \text{ I}_{B} = 0$		2	100	nA
ICES	Collector Out-Oir Out-ent	BC338	$V_{CE} = 25 \text{ V}, \text{ I}_{B} = 0$		2	100	
h <sub>FE1</sub>	DC Current Gain		$V_{CE} = 1 \text{ V}, I_{C} = 100 \text{ mA}$	100		630	
h <sub>FE2</sub>			$V_{CE} = 1 \text{ V}, I_{C} = 300 \text{ mA}$	60			
V <sub>CE</sub> (sat)	at) Collector-Emitter Saturation Voltage		$I_{\rm C} = 500 \text{ mA}, I_{\rm B} = 50 \text{ mA}$			0.7	V
V <sub>BE</sub> (on)	Base-Emitter On Voltage		$V_{CE} = 1 \text{ V}, \text{ I}_{C} = 300 \text{ mA}$			1.2	V
f <sub>T</sub>	Current Gain Bandwidth Product		$V_{CE}$ = 5 V, I <sub>C</sub> = 10 mA, f = 50 MHz		100		MHz
C <sub>ob</sub>	Output Capacitance		$V_{CB} = 10 \text{ V}, \text{ I}_{E} = 0,$ f = 1 MHz		12		pF

### h<sub>FE</sub> Classification

Classification	16	25	40
h <sub>FE1</sub>	100 ~ 250	160 ~ 400	250 ~ 630
h <sub>FE2</sub>	60 ~	100 ~	170 ~

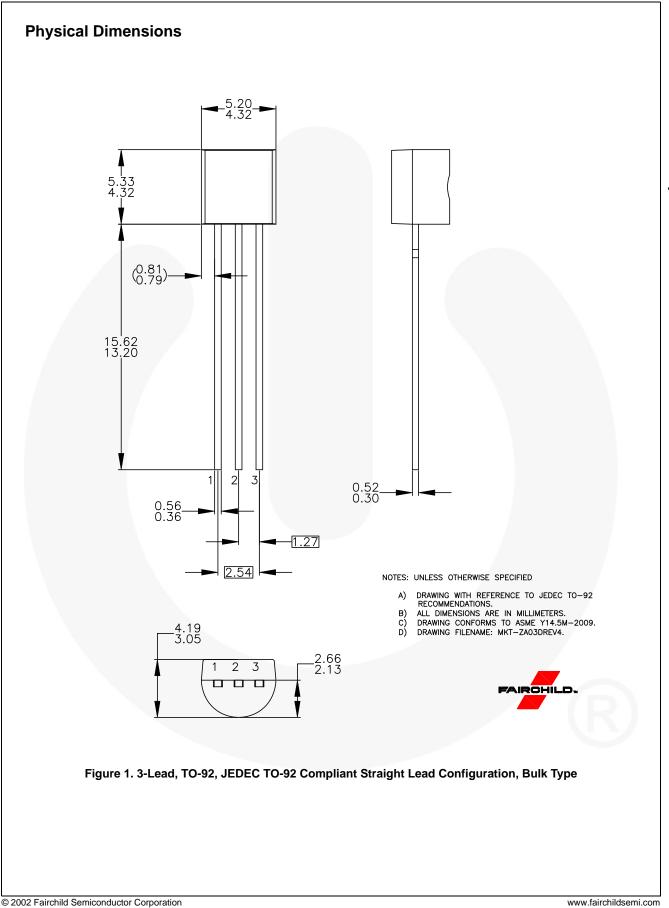

BC337 / BC338 Rev. 1.5

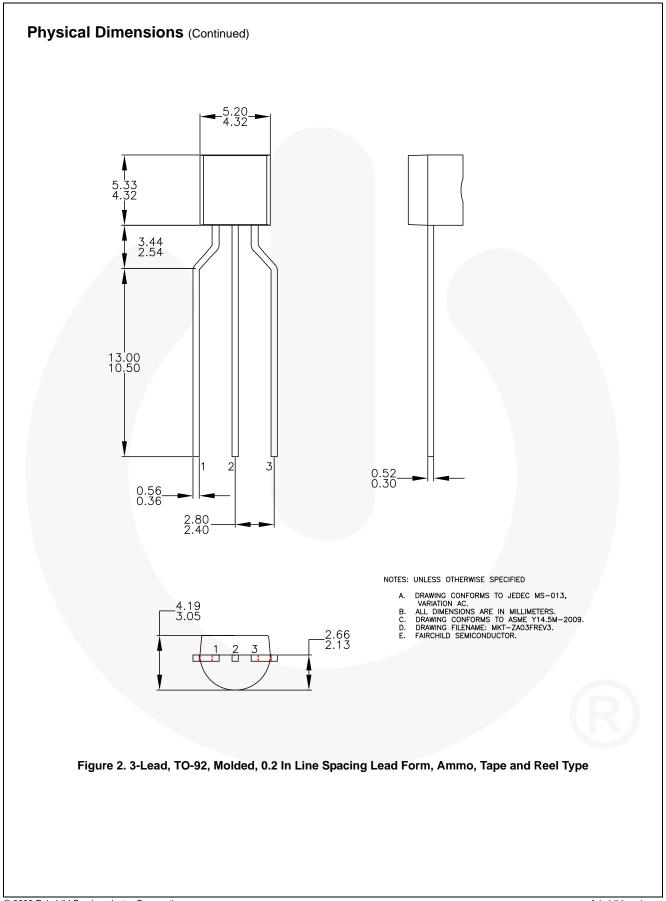

© 2002 Fairchild Semiconductor Corporation BC337 / BC338 Rev. 1.5 BC337 / BC338 — NPN Epitaxial Silicon Transistor

#### FAIRCHILD. TRADEMARKS The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks. F-PFS™ **OPTOPLANAR<sup>®</sup>** AccuPower™ AttitudeEngine™ **FRFET**<sup>®</sup> Awinda<sup>®</sup> AX-CAP<sup>®</sup>\* Global Power Resource<sup>SM</sup> ® TinyBoost® GreenBridge™ TinyBuck® Power Supply WebDesigner™ TinyCalc™ BitSiC™ Green FPS™ PowerTrench Build it Now™ TinyLogic® Green FPS™ e-Series™ PowerXS™ CorePI US™ Gmax™ TINYOPTO™ Programmable Active Droop™ GTO™ CorePOWER™ TinyPower™ QFĔT CROSSVOLT™ IntelliMAX™ TinyPWM™ QS™ TinvWire™ CTL™ ISOPI ANAR™ Quiet Series™ Current Transfer Logic™ TranSiC™ Making Small Speakers Sound Louder RapidConfigure™ TriFault Detect™ **DEUXPEED**<sup>®</sup> and Better™ Dual Cool™ TRUECURRENT®\* MegaBuck™ Saving our world, 1mW/W/kW at a time™ **EcoSPARK<sup>®</sup>** MICROCOUPLER™ μSerDes™ SignalWise™ EfficientMax™ MicroFET™ SmartMax™ MicroPak™ ESBC™ SMART START™ MicroPak2™ F UHC Solutions for Your Success™ MillerDrive™ Ultra FRFET™ Fairchild® SPM<sup>®</sup> MotionMax™ UniFET™ Fairchild Semiconductor® STEALTH™ MotionGrid® VCX™ FACT Quiet Series™ SuperFET<sup>®</sup> MTi<sup>®</sup> VisualMax™ FACT SuperSOT™-3 MTx® VoltagePlus™ FastvCore™ SuperSOT™-6 MVN® XS™ FETBench™ SuperSOT™-8 mWSaver® Xsens™ SupreMOS<sup>®</sup> **FPS™** OptoHiT™ 仙童® SyncFET™ **OPTOLOGIC<sup>®</sup>** Sync-Lock™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP:///WWW.FAIRCHILDSEMI.COM</u>. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is augement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild to combat this global problem and encourage our customers to ot their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

<b>Datasheet Identification</b>	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 177

© Fairchild Semiconductor Corporation

www.fairchildsemi.com

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com