

# **Surface Mount Standard Recovery Power Rectifier**

**SMA Power Surface Mount Package** 

## MRA4003T3G Series, NRVA4003T3G Series

Features construction with glass passivation. Ideally suited for surface mounted automotive applications.

#### **Features**

- Compact Package with J-Bend Leads Ideal for Automated Handling
- Stable, High Temperature, Glass Passivated Junction
- NRVA Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant\*

#### **Mechanical Characteristics**

- Case: Molded Epoxy
   Epoxy meets UL 94 V-0 @ 0.125 in
- Weight: 70 mg (Approximately)
- Finish: All External Surfaces are Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 seconds in Solder Bath
- Polarity: Band in Plastic Body Indicates Cathode Lead
- Marking: MRA4003T3G = R13

MRA4004T3G = R14

MRA4005T1G = R15

MRA4005T3G = R15

MRA4006T3G = R16

MRA4000T3G = R10MRA4007T3G = R17

NRVA4003T3G = R13

NRVA4003T3G = R13NRVA4004T3G = R14

NRVA4005T3G = R15

NRVA4006T3G = R16

NRVA4007T3G = R17

- ESD Rating:
  - Human Body Model 3A
  - · Machine Model C

#### STANDARD RECOVERY RECTIFIERS 1.0 AMPERES 300-1000 VOLTS



SMA CASE 403D

#### MARKING DIAGRAM



R1x = Specific Device Code

= Wafer Source

A = Assembly Location

= Year

WW = Work Week

= Pb–Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the ordering information section on page 4 of this data sheet.

<sup>\*</sup>For additional information on our Pb–Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### MRA4003T3G Series, NRVA4003T3G Series

#### **MAXIMUM RATINGS**

|  |  | Value      |                      |                      |                      |                      |       |
|--|--|------------|----------------------|----------------------|----------------------|----------------------|-------|
| Rating   | Symbol   | MRA4003    | MRA4004/<br>NRVA4004 | MRA4005/<br>NRVA4005 | MRA4006/<br>NRVA4006 | MRA4007/<br>NRVA4007 | Unit  |
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                             | V <sub>RRM</sub><br>V <sub>RWM</sub><br>V <sub>R</sub> | 300        | 400                  | 600                  | 800                  | 1000                 | Volts |
| Avg. Rectified Forward Current (At Rated V <sub>R</sub> , T <sub>L</sub> = 150°C)                                  | Io   | 1          |                      |                      |                      |                      | Amp   |
| Peak Repetitive Forward Current<br>(At Rated V <sub>R</sub> , Square Wave,<br>20 kHz, T <sub>L</sub> = 150°C)      | I <sub>FRM</sub>                                       | 2          |                      |                      |                      | Amps                 |       |
| Non-Repetitive Peak Surge Current<br>(Surge applied at rated load<br>conditions, halfwave, single phase,<br>60 Hz) | I <sub>FSM</sub>                                       | 30         |                      |                      | Amps                 |                      |       |
| Junction Operating Temperature Range   | T <sub>J</sub>   | -55 to 150 |                      |                      |                      | °C                   |       |
| Storage Temperature Range  | T <sub>stg</sub>                                       | -55 to 175 |                      |                      |                      | °C                   |       |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS

| Characteristic   | Symbol                               | Value        | Unit |
|--|--------------------------------------|--------------|------|
| Thermal Resistance, Junction–to–Lead (Note 1) Thermal Resistance, Junction–to–Ambient (Note 2) | R <sub>θJL</sub><br>R <sub>θJA</sub> | 16.2<br>88.3 | °C/W |

#### **ELECTRICAL CHARACTERISTICS**

|  |                | Value                 |                        |       |
|--|----------------|-----------------------|------------------------|-------|
| Characteristic   | Symbol         | T <sub>J</sub> = 25°C | T <sub>J</sub> = 100°C | Unit  |
| Maximum Instantaneous Forward Voltage (Note 3) (I <sub>F</sub> = 1 A) (I <sub>F</sub> = 2 A) | V <sub>F</sub> | 1.1<br>1.18           | 1.04<br>1.12           | Volts |
| Maximum Instantaneous Reverse Current (at rated DC voltage)                                  | I <sub>R</sub> | 10                    | 50                     | μΑ    |

- 1. Minimum Pad Size
- 2. 1 inch Pad Size
- 3. Pulse Test: Pulse Width  $\leq$  250  $\mu s,$  Duty Cycle  $\leq$  2%.


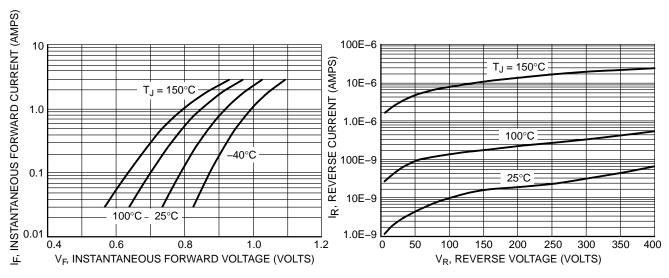


Figure 1. Typical Forward Voltage

**Figure 2. Typical Reverse Current** 

#### MRA4003T3G Series, NRVA4003T3G Series



1.8 P<sub>FO</sub>, AVERAGE POWER DISSIPATION (WATTS) dc 1.6 1.4 Square Wave 1.2 1.0 0.8 0.6 0.4 0.2 0 2.0 0.5 1.0 1.5 0 I<sub>O</sub>, AVERAGE FORWARD CURRENT (AMPS)

Figure 3. Current Derating

Figure 4. Forward Power Dissipation per Leg




Figure 5. Capacitance

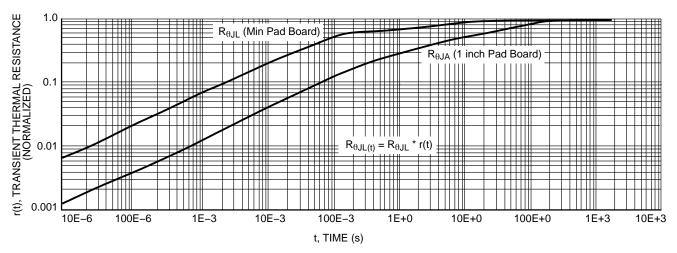


Figure 6. Thermal Response

#### MRA4003T3G Series, NRVA4003T3G Series

#### **ORDERING INFORMATION**

| Device       | Package          | Shipping†           |
|--------------|------------------|---------------------|
| MRA4003T3G   |                  | 5.000 / Tana 8 Daal |
| MRA4004T3G   |                  | 5,000 / Tape & Reel |
| MRA4005T1G   |                  | 1,500 / Tape & Reel |
| MRA4005T3G   |                  |                     |
| MRA4006T3G   | SMA<br>(Pb-Free) | 5,000 / Tape & Reel |
| MRA4007T3G   |                  |                     |
| NRVA4003T3G* |                  |                     |
| NRVA4004T3G* |                  |                     |
| NRVA4005T3G* |                  | 5,000 / Tape & Reel |
| NRVA4006T3G* |                  |                     |
| NRVA4007T3G* |                  |                     |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>NRVA Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

#### **MECHANICAL CASE OUTLINE**

PACKAGE DIMENSIONS







STYLE 1 STYLE 2

SCALE 1:1





**DATE 22 OCT 2021** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCHES
- 3. DIMENSION & SHALL BE MEASURED WITHIN DIMENSION L.

|     | MILLIMETERS |      |      |       | INCHES |       |  |
|-----|-------------|------|------|-------|--------|-------|--|
| DIM | MIN.        | N□M. | MAX. | MIN.  | N□M.   | MAX.  |  |
| Α   | 1.97        | 2.10 | 2.20 | 0.078 | 0.083  | 0.087 |  |
| A1  | 0.05        | 0.10 | 0.20 | 0.002 | 0.004  | 0.008 |  |
| b   | 1.27        | 1.45 | 1.63 | 0.050 | 0.057  | 0.064 |  |
| С   | 0.15        | 0.28 | 0.41 | 0.006 | 0.011  | 0.016 |  |
| D   | 2.29        | 2.60 | 2.92 | 0.090 | 0.103  | 0.115 |  |
| Ε   | 4.06        | 4.32 | 4.57 | 0.160 | 0.170  | 0.180 |  |
| HE  | 4.83        | 5.21 | 5.59 | 0.190 | 0.205  | 0.220 |  |
| L   | 0.76        | 1.14 | 1.52 | 0.030 | 0.045  | 0.060 |  |

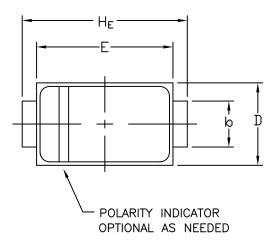




STYLE 1: STYLE 2: PIN 1. CATHODE (POLARITY BAND) NO POLARITY 2. ANODE

# A1 4.000 [0.157] 2.000 [0.079] 2.000 [0.079]

RECOMMENDED MOUNTING FOOTPRINT

### GENERIC MARKING DIAGRAM\*



xxxx = Specific Device Code A = Assembly Location Y = Year

WW = Work Week
■ Pb–Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| DOCUMENT NUMBER: | 98AON04079D | Electronic versions are uncontrolled except when accessed directly from the Document Reposito<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |             |  |  |
|------------------|-------------|--|-------------|--|--|
| DESCRIPTION:     | SMA         |  | PAGE 1 OF 1 |  |  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

**TECHNICAL SUPPORT** North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative