SEMICONDUCTOR

DM74ALS574A **Octal D-Type Edge-Triggered Flip-Flop** with 3-STATE Outputs

General Description

These 8-bit registers feature totem-pole 3-STATE outputs designed specifically for driving highly-capacitive or relatively low-impedance loads. The high-impedance state and increased high-logic-level drive provide these registers with the capability of being connected directly to and driving the bus lines in a bus-organized system without need for interface or pull-up components. They are particularly attractive for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.

The eight flip-flops of the DM74ALS574A are edge-triggered D-type flip-flops. On the positive transition of the clock, the Q outputs will be set to the logic states that were set up at the D inputs.

A buffered output control input can be used to place the eight outputs in either a normal logic state (HIGH or LOW logic levels) or a high-impedance state. In the high-impedance state the outputs neither load nor drive the bus lines significantly.

The output control does not affect the internal operation of the flip-flops. That is, the old data can be retained or new data can be entered even while the outputs are OFF.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and $V_{\mbox{\scriptsize CC}}$ range

September 1986


Revised February 2000

- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally equivalent with DM74LS374
- Improved AC performance over DM74LS374 at approximately half the power
- 3-STATE buffer-type outputs drive bus lines directly

Ordering C	ode:
------------	------


Order Number	Package Number	Package Description
DM74ALS574AWM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
DM74ALS574ASJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
DM74ALS574AN	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide
Devices also available in	Tane and Reel Specify h	w appending the suffix letter "X" to the ordering code

Connection Diagram

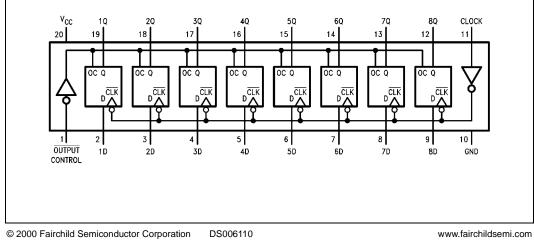



Function Table Output Output Clock D Control Q L \uparrow н н L Ŷ L L L L Х Q_0 н Х Х Ζ $\begin{array}{l} L = LOW \mbox{ State } \\ H = HIGH \mbox{ State } \\ X = Dont \mbox{ Care } \\ \uparrow = \mbox{ Positive Edge Transition } \\ Z = High \mbox{ Impedance State } \\ Q_0 = \mbox{ Previous Condition of } Q \end{array}$

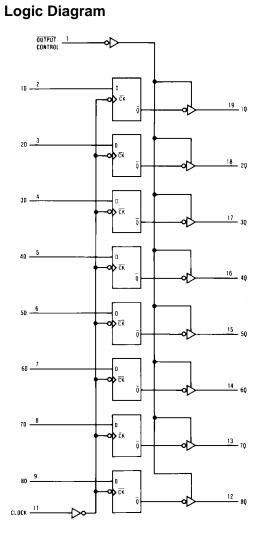

www.fairchildsemi.com

Downloaded from Arrow.com.

Absolute Maximum Ratings(Note 1)

Supply Voltage	7V
Input Voltage	7V
Voltage Applied to Disabled Output	5.5V
Operating Free Air Temperature Range	$0^{\circ}C$ to $+70^{\circ}C$
Storage Temperature Range	$-65^{\circ}C$ to $+150^{\circ}C$
Typical θ _{JA}	
N Package	56.0°C/W
M Package	75.0°C/W

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

DM74ALS574A

Recommended Operating Conditions

Symbol	Parameter		Min	Nom	Max	Units	
V _{CC}	Supply Voltage		4.5	5	5.5	V	
V _{IH}	HIGH Level Input Voltage		2			V	
V _{IL}	LOW Level Input Voltage				0.8	V	
I _{OH}	HIGH Level Output Current				-2.6	mA	
I _{OL}	LOW Level Output Current				24	mA	
f _{CLOCK}	Clock Frequency		0		35	MHz	
+	Width of Clock Pulse	HIGH	14			ns	
t _W		LOW	14			ns	
t _{SU}	Data Setup Time	(Note 2)	15 ↑			ns	
t _H	Data Hold Time	(Note 2)	0 ↑			ns	
T _A	Free Air Operating Temperature		0		70	°C	

Electrical Characteristics


Symbol	Parameter	$\label{eq:VCC} \begin{array}{c} \mbox{Conditions} \\ \mbox{V}_{CC} = 4.5 \mbox{V}, \mbox{I}_{I} = -18 \mbox{ mA} \end{array}$		ameter Conditions M	Min	Тур	Max	Units
V _{IK} Input Clamp Voltage V _{OH} HIGH Level Output Voltage	Input Clamp Voltage					-1.2	V	
		$V_{CC} = 4.5V$ $V_{IL} = V_{IL}$ Max	I _{OH} = Max	2.4	3.2		V	
		$V_{CC} = 4.5V$ to 5.5V	I _{OH} = -400 μA	$V_{CC} - 2$			V	
V _{OL} LOW Level Output Voltage		$V_{CC} = 4.5V$ $V_{IH} = 2V$	I _{OL} = 12 mA		0.25	0.4	V	
			I _{OL} = 24 mA		0.35	0.5	V	
I _I	Input Current at Max Input Voltage	$V_{CC} = 5.5 V$, $V_{IH} = 7 V$	•			0.1	mA	
I _{IH}	HIGH Level Input Current	$V_{CC} = 5.5 V, V_{IH} = 2.7 V$				20	μΑ	
IIL	LOW Level Input Current	$V_{CC} = 5.5 V, V_{IL} = 0.4 V$				-0.2	mA	
I _O	Output Drive Current	$V_{CC} = 5.5 V, V_{O} = 2.25 V$		-30		-112	mA	
I _{OZH}	OFF-State Output Current HIGH Level Voltage Applied	$V_{CC} = 5.5V, V_{IH} = 2V$ $V_O = 2.7V$				20	μΑ	
I _{OZL}	OFF-State Output Current d LOW Level Voltage Applied	$V_{CC} = 5.5V, V_{IH} = 2V$ $V_O = 0.4V$				-20	μA	
I _{CC}	Supply Current	$V_{CC} = 5.5V$	Outputs HIGH		11	18	mA	
		Outputs Open	Outputs LOW		17	27	mA	
			Outputs Disabled		17	28	mA	

◄
4
ŝ
ö
◄
4
~
5
5


Switching Characteristics


Symbol	Parameter	Conditions	From	То	Min	Max	Units
f _{MAX}	Maximum Clock Frequency	$V_{CC} = 4.5V$ to 5.5V			35		MHz
t _{PLH}	Propagation Delay Time LOW-to-HIGH Level Output	$R_L = 500\Omega$ $C_L = 50 \text{ pF}$	Clock	Any Q	4	14	ns
t _{PHL}	Propagation Delay Time HIGH-to-LOW Level Output		Clock	Any Q	4	14	ns
t _{PZH}	Output Enable Time to HIGH Level Output		Output Control	Any Q	4	18	ns
t _{PZL}	Output Enable Time to LOW Level Output		Output Control	Any Q	4	18	ns
t _{PHZ}	Output Disable Time from HIGH Level Output		Output Control	Any Q	2	10	ns
t _{PLZ}	Output Disable Time from LOW Level Output		Output Control	Any Q	2	12	ns

www.fairchildsemi.com

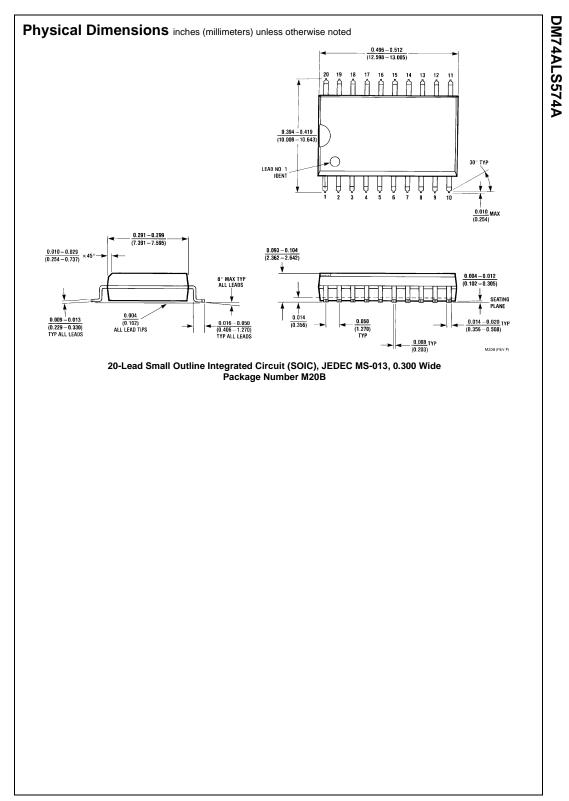

5

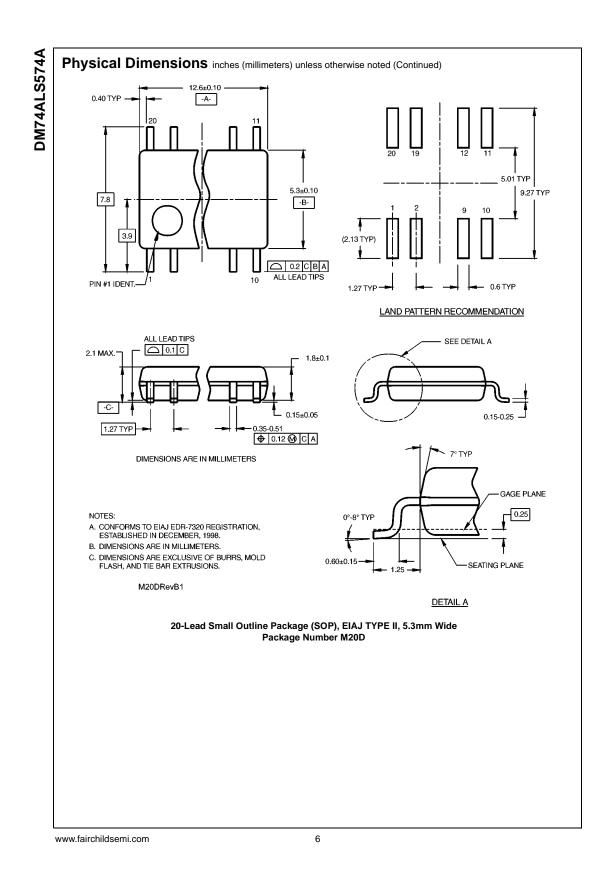

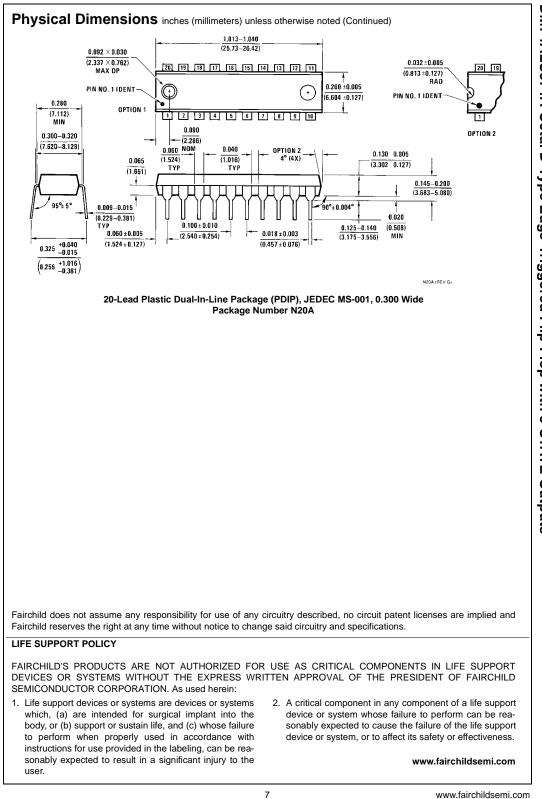

DM74ALS574A Octal D-Type Edge-Triggered Flip-Flop with 3-STATE Outputs