# 74HC377; 74HCT377

Octal D-type flip-flop with data enable; positive-edge trigger

Rev. 4 — 24 February 2016 Product data sheet

### 1. General description

The 74HC377; 74HCT377 is an octal positive-edge triggered D-type flip-flop. The device features clock (CP) and data enable ( $\overline{E}$ ) inputs. When  $\overline{E}$  is LOW, the outputs Qn assume the state of their corresponding Dn inputs that meet the set-up and hold time requirements on the LOW-to-HIGH clock (CP) transition. Input  $\overline{E}$  must be stable one set-up time prior to the LOW-to-HIGH transition for predictable operation. Inputs include clamp diodes that enable the use of current limiting resistors to interface inputs to voltages in excess of  $V_{CC}$ .

#### 2. Features and benefits

- Common clock and master reset
- Eight positive edge-triggered D-type flip-flops
- Complies with JEDEC standard no. 7A
- Input levels:
  - ◆ For 74HC377: CMOS level
  - ◆ For 74HCT377: TTL level
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - ♦ MM JESD22-A115-A exceeds 200 V.
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


# 3. Ordering information


Table 1. Ordering information


Type number	Package			
	Temperature range	Name	Description	Version
74HC377D	-40 °C to +85 °C	SO20	plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1
74HCT377D				
74HC377DB	-40 °C to +85 °C	SSOP20	plastic shrink small outline package; 20 leads; body width	SOT339-1
74HCT377DB			5.3 mm	
74HC377PW	-40 °C to +85 °C	TSSOP20	plastic thin shrink small outline package; 20 leads; body	SOT360-1
74HCT377PW			width 4.4 mm	



# 4. Functional diagram

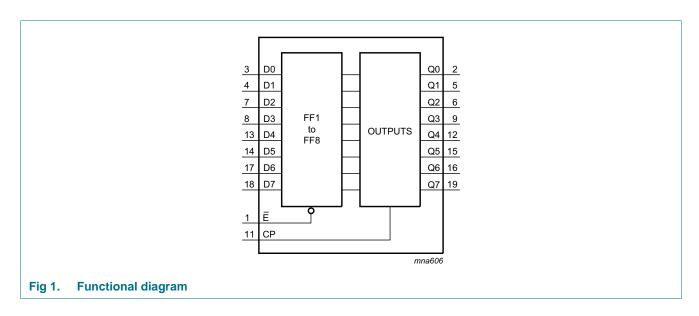


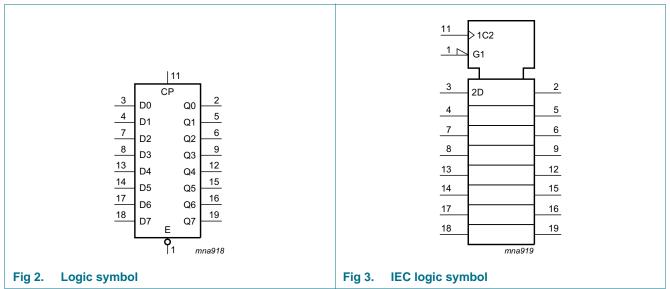

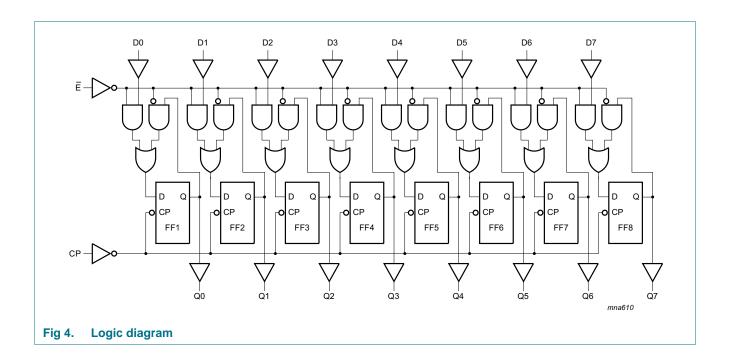

# 5. Pinning information

### 5.1 Pinning

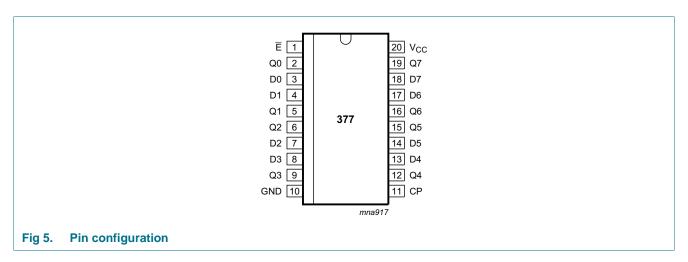

### 5.2 Pin description

#### Table 2. Pin description

Symbol	Pin	Description
Ē	1	data enable input (active LOW)
Q0, Q1, Q2, Q3, Q4, Q5, Q6, Q7	2, 5, 6, 9, 12, 15, 16, 19	flip-flop output
D0, D1, D2, D3, D4, D5, D6, D7	3, 4, 7, 8, 13, 14, 17, 18	data input
GND	10	ground (0 V)
СР	11	clock input (LOW-to-HIGH, edge triggered)
Vcc	20	supply voltage

# 6. Functional description

Table 3. Function table [1]

Operating modes	Inputs	Inputs						
	СР	Dn	Qn					
load "1"	<b>↑</b>	I	h	Н				
load "0"	<b>↑</b>	I	I	L				
hold (do nothing)	-	h	X	no change				
	X	Н	X	no change				

#### [1] H = HIGH voltage level;

 $h = HIGH \ voltage \ level \ one \ set-up \ time \ prior \ to \ the \ LOW-to-HIGH \ clock \ transition;$ 

L = LOW voltage level;

I = LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition;

X = don't care;

 $\uparrow$  = LOW-to-HIGH clock transition.

74HC\_HCT377

All information provided in this document is subject to legal disclaimers.

# 7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±20	mA
I <sub>OK</sub>	output clamping current	$V_{O} < -0.5 \text{ V or } V_{O} > V_{CC} + 0.5 \text{ V}$	<u>[1]</u>	-	±20	mA
Io	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$		-	±25	mA
I <sub>CC</sub>	supply current			-	50	mA
I <sub>GND</sub>	ground current			-50	-	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb} = -40  ^{\circ}\text{C} \text{ to } +125  ^{\circ}\text{C}$				
		SO20, SSOP20, TSSOP20	[2]	-	500	mW

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 8. Recommended operating conditions

Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	Conditions 74HC377		7	4HCT37	7	Unit	
			Min	Тур	Max	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	-	+125	-40	-	+125	°C
Δt/ΔV	input transition rise and fall rate	V <sub>CC</sub> = 2.0 V	-	-	625	-	-	-	ns/V
		$V_{CC} = 4.5 \text{ V}$	-	1.67	139	-	1.67	139	ns/V
		$V_{CC} = 6.0 \text{ V}$	-	-	83	-	-	-	ns/V

<sup>[2]</sup> For SO20 package: above 70 °C the value of P<sub>tot</sub> derates linearly with 8 mW/K.
For SSOP20 and TSSOP20 packages: above 60 °C the value of P<sub>tot</sub> derates linearly with 5.5 mW/K.

# 9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	-40 °C to	o +125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	1
74HC37	7				1					
V <sub>IH</sub>	HIGH-level	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	input voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
$V_{IL}$	LOW-level	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	input voltage	V <sub>CC</sub> = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V <sub>OH</sub>	HIGH-level	$V_I = V_{IH}$ or $V_{IL}$								
	output voltage	$I_O = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	1.9	-	V
		$I_O = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	4.4	-	V
		$I_O = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	5.9	-	V
		$I_{O} = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.98	4.32	-	3.84	-	3.7	-	V
		$I_{O} = -5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>	LOW-level	$V_I = V_{IH}$ or $V_{IL}$								
	output voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 6.0 V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.26	-	0.33	-	0.4	V
		$I_O = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.26	-	0.33	-	0.4	V
l <sub>l</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±0.1	-	±1	-	±1	μΑ
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	8.0	-	80	-	160	μА
Cı	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT3	77									
V <sub>IH</sub>	HIGH-level input voltage	V <sub>CC</sub> = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	V <sub>CC</sub> = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -4.0 mA	3.98	4.32	-	3.84	-	3.7	-	V
V <sub>OL</sub>	LOW-level	$V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$								
	output voltage	$I_O = 20 \mu A; V_{CC} = 4.5 \text{ V}$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 5.2 \text{ mA}; V_{CC} = 5.5 \text{ V}$	-	0.15	0.26	-	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	±0.1	-	±1	-	±1	μΑ

74HC\_HCT377

All information provided in this document is subject to legal disclaimers.

 Table 6.
 Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	25 °C -		-40 °C to	o +85 °C	-40 °C to	+125 °C	Unit	
			Min	Тур	Max	Min	Max	Min	Max	
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	8.0	-	80	-	160	μΑ
Δl <sub>CC</sub>	additional supply current	per input pin; $V_I = V_{CC} - 2.1 \text{ V}$ ; other inputs at $V_{CC}$ or GND; $V_{CC} = 4.5 \text{ V}$ to $5.5 \text{ V}$								
		E input	-	150	540	-	675	-	735	μΑ
		CP input	-	50	180	-	225	-	245	μΑ
		Dn input	-	20	72	-	90	-	98	μΑ
C <sub>I</sub>	input capacitance		-	3.5	-	-	-	-	-	pF

# 10. Dynamic characteristics

#### Table 7. Dynamic characteristics

GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see Figure 8

Symbol	Parameter	Conditions		25 °C		-40 °C t	o +85 °C	-40 °C to	+125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC377	7				1	1		1		
t <sub>pd</sub>	propagation	CP to Qn; see Figure 6								
	delay	V <sub>CC</sub> = 2.0 V	-	44	160	-	200	-	240	ns
		V <sub>CC</sub> = 4.5 V	-	16	32	-	40	-	48	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$	-	13	-	-	-	-	-	-
		V <sub>CC</sub> = 6.0 V	-	13	27	-	34	-	41	ns
t <sub>t</sub>	transition time	Qn output; see Figure 6 [2]								
		V <sub>CC</sub> = 2.0 V	-	19	75	-	95	-	110	ns
		V <sub>CC</sub> = 4.5 V	-	7	15	-	19	-	22	ns
		V <sub>CC</sub> = 6.0 V	-	6	13	-	16	-	19	ns
t <sub>W</sub>	pulse width	CP input HIGH or LOW; see Figure 6								
		V <sub>CC</sub> = 2.0 V	80	14	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	5	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	4	-	17	-	20	-	ns
t <sub>su</sub>	set-up time	Dn to CP; see Figure 7								
		V <sub>CC</sub> = 2.0 V	60	14	-	75	-	90	-	ns
		V <sub>CC</sub> = 4.5 V	12	5	-	15	-	18	-	ns
		V <sub>CC</sub> = 6.0 V	10	4	-	13	-	15	-	ns
		E to CP; see Figure 7								
		V <sub>CC</sub> = 2.0 V	60	6	-	75	-	90	-	ns
		V <sub>CC</sub> = 4.5 V	12	2	-	15	-	18	-	ns
		V <sub>CC</sub> = 6.0 V	10	2	-	13	-	15	-	ns

74HC\_HCT377

All information provided in this document is subject to legal disclaimers.

 Table 7.
 Dynamic characteristics ...continued

GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see Figure 8

Symbol	Parameter	Conditions		25 °C		-40 °C to	o +85 °C	-40 °C to	o +125 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	1
t <sub>h</sub>	hold time	Dn to CP; see Figure 7								
		V <sub>CC</sub> = 2.0 V	3	-8	-	3	-	3	-	ns
		V <sub>CC</sub> = 4.5 V	3	-3	-	3	-	3	-	ns
		V <sub>CC</sub> = 6.0 V	3	-2	-	3	-	3	-	ns
		E to CP; see Figure 7								
		V <sub>CC</sub> = 2.0 V	4	-3	-	4	-	4	-	ns
		V <sub>CC</sub> = 4.5 V	4	-1	-	4	-	4	-	ns
		V <sub>CC</sub> = 6.0 V	4	-1	-	4	-	4	-	ns
f <sub>max</sub>	maximum	CP input; see Figure 6								
	frequency	V <sub>CC</sub> = 2.0 V	6	23	-	5	-	4	-	MHz
		V <sub>CC</sub> = 4.5 V	30	70	-	24	-	20	-	MHz
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$	-	77	-	-	-	-	-	MHz
		V <sub>CC</sub> = 6.0 V	35	83	-	28	-	24	-	MHz
C <sub>PD</sub>	power dissipation capacitance	per package; $V_I = GND \text{ to } V_{CC}$	-	20	-	-	-	-	-	pF
74HCT37	77									
t <sub>pd</sub>	propagation	CP to Qn; see Figure 6 [1]								
	delay	V <sub>CC</sub> = 4.5 V	-	17	32	-	40	-	48	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$	-	14	-	-	-	-	-	ns
t <sub>t</sub>	transition time	Qn output; see Figure 6 [2]								
		V <sub>CC</sub> = 4.5 V	-	7	15	-	19	-	22	ns
t <sub>W</sub>	pulse width	CP input; see Figure 6								
		V <sub>CC</sub> = 4.5 V	20	8	-	25	-	30	-	ns
t <sub>su</sub>	set-up time	Dn to CP; see Figure 7								
		V <sub>CC</sub> = 4.5 V	12	4	-	15	-	18	-	ns
		E to CP; see Figure 7								
		V <sub>CC</sub> = 4.5 V	22	12	-	28	-	33	-	ns
t <sub>h</sub>	hold time	Dn to CP; see Figure 7								
		V <sub>CC</sub> = 4.5 V	2	-4	-	2	-	2	-	ns
		E to CP; see Figure 7								
		V <sub>CC</sub> = 4.5 V	3	-2	-	3	-	3	-	ns
f <sub>max</sub>	maximum	CP input; see Figure 6								
	frequency	V <sub>CC</sub> = 4.5 V	27	48	-	22	-	18	-	MHz
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$	-	53	-	-	-	-	-	MHz

74HC\_HCT377

#### Table 7. Dynamic characteristics ... continued

GND (ground = 0 V); C<sub>L</sub> = 50 pF unless otherwise specified; for test circuit, see Figure 8

Symbol	Parameter	Conditions	25 °C		-40 °C to +85 °C		-40 °C to +125 °C		Unit	
			Min	Тур	Max	Min	Max	Min	Max	
C <sub>PD</sub>	power dissipation capacitance	per package; $V_I = GND$ to $V_{CC} - 1.5 \text{ V}$	-	20	-	1	-	-	-	pF

- [1]  $t_{pd}$  is the same as  $t_{PHL}$  and  $t_{PLH}$ .
- [2]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .
- [3]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu W$ ).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$  where:

f<sub>i</sub> = input frequency in MHz;


f<sub>o</sub> = output frequency in MHz;

 $\Sigma (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs;

C<sub>L</sub> = output load capacitance in pF;

 $V_{CC}$  = supply voltage in V.


### 11. Waveforms

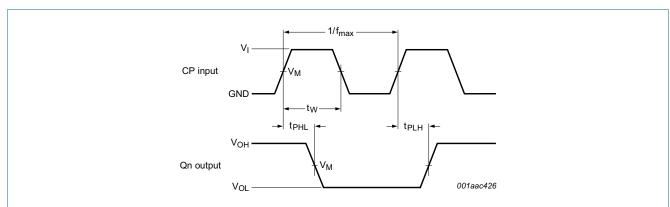

Measurement points are given in Table 8.

V<sub>OL</sub> and V<sub>OH</sub> are typical voltage output levels that occur with the output load.

Fig 6. Propagation delay clock input (CP) to output (Qn), clock (CP) pulse width, output transition time and the maximum clock pulse frequency

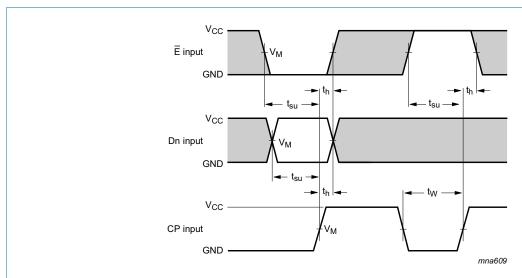

Measurement points are given in Table 8.


The shaded areas indicate when the input is permitted to change for predictable output performance.

 $V_{\mbox{\scriptsize OL}}$  and  $V_{\mbox{\scriptsize OH}}$  are typical voltage output levels that occur with the output load.

Fig 7. Data set-up and hold times data input (Dn)

Table 8. Measurement points

Туре	Input	Output	
	V <sub>I</sub>	V <sub>M</sub>	V <sub>M</sub>
74HC377	V <sub>CC</sub>	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>
74HCT377	3 V	1.3 V	1.3 V

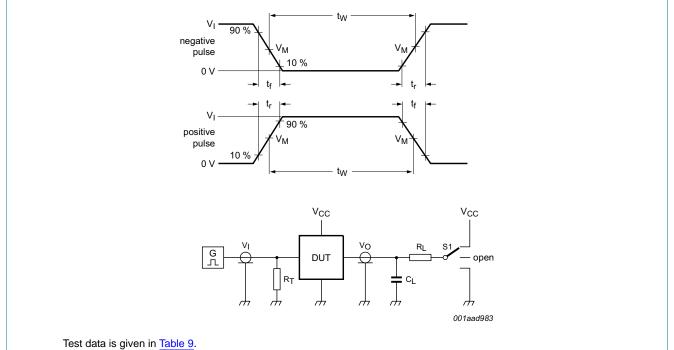

Definitions for test circuit:

 $R_T$  = Termination resistance should be equal to output impedance  $Z_0$  of the pulse generator.

 $C_L$  = Load capacitance including jig and probe capacitance.

R<sub>L</sub> = Load resistance.

S1 = Test selection switch

Fig 8. Test circuit for measuring switching times


Table 9. Test data

Туре	Input		Load	S1 position	
	VI	t <sub>r</sub> , t <sub>f</sub>	C <sub>L</sub>	$R_L$	t <sub>PHL</sub> , t <sub>PLH</sub>
74HC377	V <sub>CC</sub>	6 ns	15 pF, 50 pF	1 kΩ	open
74HCT377	3 V	6 ns	15 pF, 50 pF	1 kΩ	open

# 12. Package outline

SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

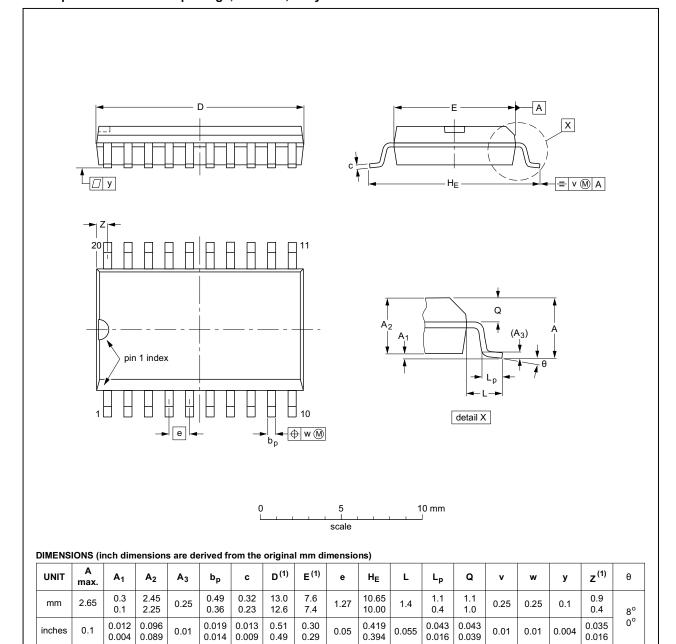

#### Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.


OUTLINE		REFER	EUROPEAN	ISSUE DATE		
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT163-1	075E04	MS-013				<del>99-12-27</del> 03-02-19

Fig 9. Package outline SOT163-1 (SO20)

74HC\_HCT377 All information provided in this document is subject to legal disclaimers.

### SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

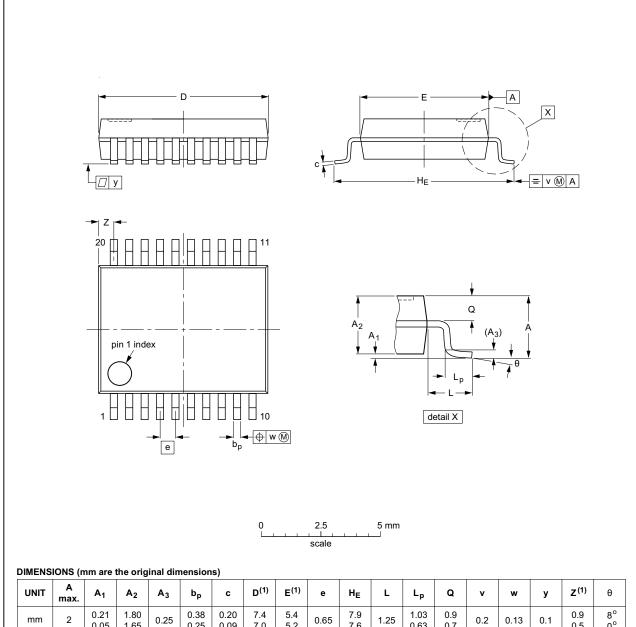

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	<b>A</b> <sub>3</sub>	bp	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	ø	v	w	у	Z <sup>(1)</sup>	θ
mm	2	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	7.4 7.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	0.9 0.5	8° 0°

#### Note

1. Plastic or metal protrusions of 0.2 mm maximum per side are not included.


OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT339-1		MO-150				<del>99-12-27</del> 03-02-19	

Fig 10. Package outline SOT339-1 (SSOP20)

74HC\_HCT377 All information provided in this document is subject to legal disclaimers.

TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm

SOT360-1

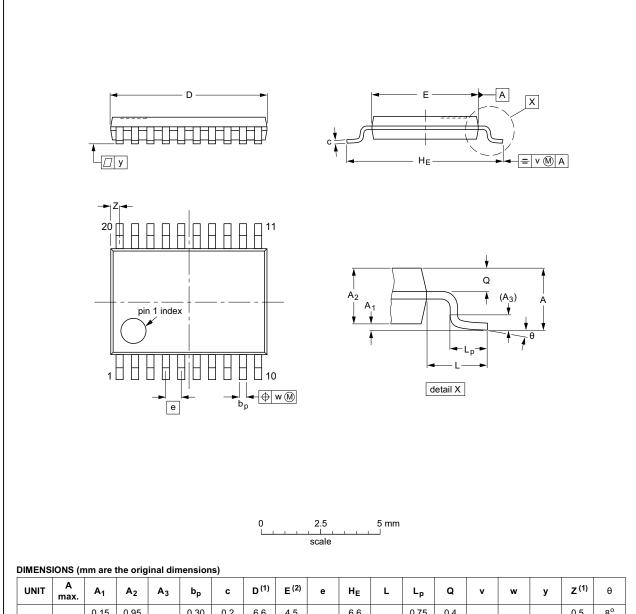

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	<b>A</b> <sub>3</sub>	bp	С	D <sup>(1)</sup>	E (2)	е	HE	L	Lp	Q	٧	w	у	Z <sup>(1)</sup>	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	6.6 6.4	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.5 0.2	8° 0°

#### Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

ILITA			
JEITA	1	ROJECTION	ISSUE DATE
	€		<del>99-12-27</del> 03-02-19
		ŧ	

Fig 11. Package outline SOT360-1 (TSSOP20)

74HC\_HCT377 All information provided in this document is subject to legal disclaimers.

# 13. Abbreviations

#### Table 10. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

# 14. Revision history

### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes			
74HC_HCT377 v.4	20160224	Product data sheet	-	74HC_HCT377 v.3			
Modifications:	Type numbers 74HC377N and 74HCT377N (SOT146-1) removed.						
74HC_HCT377 v.3	20130925	Product data sheet	-	74HC_HCT377_CNV v.2			
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors.</li> </ul>						
	<ul> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>						
74HC_HCT377_CNV v.2	19901227	Product specification	-	-			

# 15. Legal information

#### 15.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

74HC\_HCT377

All information provided in this document is subject to legal disclaimers.

# 74HC377; 74HCT377

#### Octal D-type flip-flop with data enable; positive-edge trigger

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of

non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### 16. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

74HC\_HCT377

All information provided in this document is subject to legal disclaimers.

# 17. Contents

1	General description 1
2	Features and benefits 1
3	Ordering information
4	Functional diagram 2
5	Pinning information 4
5.1	Pinning
5.2	Pin description 4
6	Functional description 4
7	Limiting values 5
8	Recommended operating conditions 5
9	Static characteristics 6
10	Dynamic characteristics 7
11	Waveforms
12	Package outline
13	Abbreviations
14	Revision history
15	Legal information
15.1	Data sheet status
15.2	Definitions
15.3	Disclaimers
15.4	Trademarks
16	Contact information
17	Contents