# PESDxL4UF; PESDxL4UG; PESDxL4UW

Low capacitance unidirectional quadruple ESD protection diode arrays

Rev. 04 — 28 February 2008

**Product data sheet** 

### 1. Product profile

### 1.1 General description

Low capacitance unidirectional quadruple ElectroStatic Discharge (ESD) protection diode arrays in small Surface-Mounted Device (SMD) plastic packages designed to protect up to four signal lines from the damage caused by ESD and other transients.

#### Table 1. Product overview

Type number	Package		Package configuration	
	Nexperia	JEITA	JEDEC	
PESD3V3L4UF	SOT886	-	MO-252	leadless ultra small
PESD5V0L4UF	SOT886	-	MO-252	leadless ultra small
PESD3V3L4UG	SOT353	SC-88A	-	very small
PESD5V0L4UG	SOT353	SC-88A	-	very small
PESD3V3L4UW	SOT665	-	-	ultra small and flat lead
PESD5V0L4UW	SOT665	-	-	ultra small and flat lead

### 1.2 Features

- ESD protection of up to four lines
- Low diode capacitance
- Max. peak pulse power: P<sub>PP</sub> = 30 W
- Low clamping voltage: V<sub>CL</sub> = 12 V

### **1.3 Applications**

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories

- Ultra low leakage current: I<sub>RM</sub> = 5 nA
- ESD protection up to 20 kV
- IEC 61000-4-2; level 4 (ESD)
- IEC 61000-4-5 (surge); I<sub>PP</sub> = 2.5 A
- Communication systems
- Portable electronics
- Subscriber Identity Module (SIM) card protection

# nexperia

### 1.4 Quick reference data

<b>Table 2.</b> $T_{amb} = 25$	Quick reference data °C unless otherwise specifi	ied.				
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Per diode	)					
V <sub>RWM</sub>	reverse standoff voltage					
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	-	3.3	V
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		 Iz; V <sub>R</sub> = 0 V	5.0	V	
C <sub>d</sub>	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$				
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	22	28	pF
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		-	16	19	pF

# 2. Pinning information

Table 3.	Pinning		
Pin	Description	Simplified outline	Symbol
PESD3V	3L4UF; PESD5V0L4UF		
1	cathode (diode 1)		
2	common anode		1
3	cathode (diode 2)		2 5
4	cathode (diode 3)		3
5	common anode		006aaa156
6	cathode (diode 4)	bottom view	
PESD3V	3L4UG; PESD5V0L4UG		
1	cathode (diode 1)		
2	common anode		1 - [□ - [□] - 5
3	cathode (diode 2)		2
4	cathode (diode 3)		3
5	cathode (diode 4)	$\exists 1 \exists 2 \exists 3$	006aaa157
PESD3V	3L4UW; PESD5V0L4UW		
1	cathode (diode 1)	- ·	
2	common anode		1
3	cathode (diode 2)		2
4	cathode (diode 3)		3
5	cathode (diode 4)		006aaa157

PESDXL4UF\_G\_W\_4

Product data sheet

# 3. Ordering information

Type number	Package					
	Name	Description	Version			
PESD3V3L4UF	XSON6	plastic extremely thin small outline package;	SOT886			
PESD5V0L4UF		no leads; 6 terminals; body $1 \times 1.45 \times 0.5$ mm				
PESD3V3L4UG	SC-88A	plastic surface-mounted package; 5 leads	SOT353			
PESD5V0L4UG						
PESD3V3L4UW	-	plastic surface-mounted package; 5 leads	SOT665			
PESD5V0L4UW						

### 4. Marking

Table 5.   Marking codes	
Type number	Marking code <sup>[1]</sup>
PESD3V3L4UF	A5
PESD5V0L4UF	A6
PESD3V3L4UG	L1*
PESD5V0L4UG	L2*
PESD3V3L4UW	A2
PESD5V0L4UW	A1

\* = p: made in Hong Kong

- \* = t: made in Malaysia
- \* = W: made in China

# 5. Limiting values

#### Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Мах	Unit
Per diode						
P <sub>PP</sub>	peak pulse power	$t_p = 8/20 \ \mu s$	<u>[1][2][3]</u>	-	30	W
I <sub>PP</sub>	peak pulse current	$t_p = 8/20 \ \mu s$	[1][2][3]			
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW			-	3.0	A
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW			-	2.5	A
I <sub>FSM</sub>	non-repetitive peak forward current	square wave; t <sub>p</sub> = 1 ms		-	3.5	A

PESDXL4UF\_G\_W\_4

### Low capacitance unidirectional quadruple ESD protection diode arrays

#### Table 6. Limiting values ...continued

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
I <sub>ZSM</sub>	non-repetitive peak reverse current	square wave; t <sub>p</sub> = 1 ms			
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	0.9	A
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		-	0.8	A
P <sub>ZSM</sub>	non-repetitive peak reverse power dissipation	square wave; t <sub>p</sub> = 1 ms	-	6	W
Per device					
Tj	junction temperature		-	150	°C
T <sub>amb</sub>	ambient temperature		-65	+150	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

[1] Non-repetitive current pulse 8/20 µs exponential decay waveform according to IEC 61000-4-5.

[2] For PESDxL4UF measured from pin 1, 3, 4 or 6 to pin 2 or 5.

[3] For PESDxL4UG and PESDxL4UW measured from pin 1, 3, 4 or 5 to pin 2.

#### Table 7.ESD maximum ratings

T<sub>amb</sub> = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions		Min	Мах	Unit
Per diode	1					
V <sub>ESD</sub>	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1][2][3]	-	20	kV
		MIL-STD-883 (human body model)		-	10	kV

[1] Device stressed with ten non-repetitive ESD pulses.

[2] For PESDxL4UF measured from pin 1, 3, 4 or 6 to pin 2 or 5.

[3] For PESDxL4UG and PESDxL4UW measured from pin 1, 3, 4 or 5 to pin 2.


#### Table 8. ESD standards compliance

Standard	Conditions
Per diode	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV

### Nexperia

# PESDxL4UF/G/W

### Low capacitance unidirectional quadruple ESD protection diode arrays

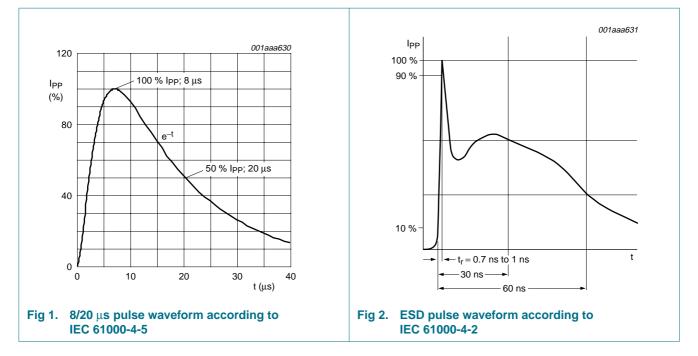

### 6. Characteristics

#### Table 9.Characteristics

T<sub>amb</sub> = 25 °C unless otherwise specified.

	•					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Per diod	e					
V <sub>RWM</sub>	reverse standoff voltage					
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	-	3.3	V
RM	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		-	-	5.0	V
I <sub>RM</sub>	reverse leakage current					
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW	V <sub>RWM</sub> = 3.3 V	-	75	300	nA
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW	V <sub>RWM</sub> = 5.0 V	-	5	25	5.0 V 300 nA 25 nA 5.88 V
V <sub>BR</sub>	breakdown voltage	I <sub>R</sub> = 1 mA				
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		5.32	5.6	5.88	V
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		6.46	6.8	7.14	V

PESDXL4UF\_G\_W\_4

**Product data sheet** 

### Low capacitance unidirectional quadruple ESD protection diode arrays

Symbol	Parameter	Conditions	N	lin T	ур Мах	c Unit
C <sub>d</sub>	diode capacitance	f = 1 MHz; V <sub>R</sub> = 0 V				
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	2	2 28	pF
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		-	1	6 19	pF
V <sub>CL</sub>	clamping voltage		[1][2][3]			
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW	I <sub>PP</sub> = 1 A	-	-	8	V
	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW	I <sub>PP</sub> = 3 A	-	-	12	V
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW	I <sub>PP</sub> = 1 A	-	-	12 N 10 N	V
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW	I <sub>PP</sub> = 2.5 A	-	-	13	V
r <sub>dif</sub>	differential resistance	$I_R = 1 \text{ mA}$				
dif	PESD3V3L4UF PESD3V3L4UG PESD3V3L4UW		-	-	200	Ω
	PESD5V0L4UF PESD5V0L4UG PESD5V0L4UW		-	-	100	Ω

### Table 9. Characteristics ...continued

 $T_{amb} = 25 \circ C$  unless otherwise specified.

[1] Non-repetitive current pulse 8/20 µs exponential decay waveform according to IEC 61000-4-5.


[2] For PESDxL4UF measured from pin 1, 3, 4 or 6 to pin 2 or 5.

[3] For PESDxL4UG and PESDxL4UW measured from pin 1, 3, 4 or 5 to pin 2.

### Nexperia


# PESDxL4UF/G/W

### Low capacitance unidirectional quadruple ESD protection diode arrays

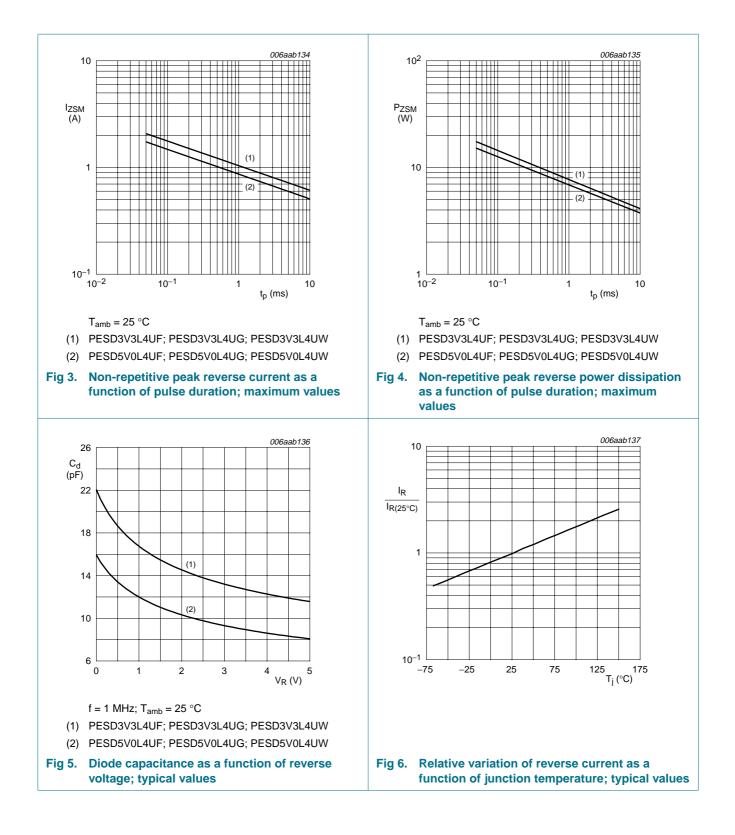


PESDXL4UF\_G\_W\_4

### Low capacitance unidirectional quadruple ESD protection diode arrays

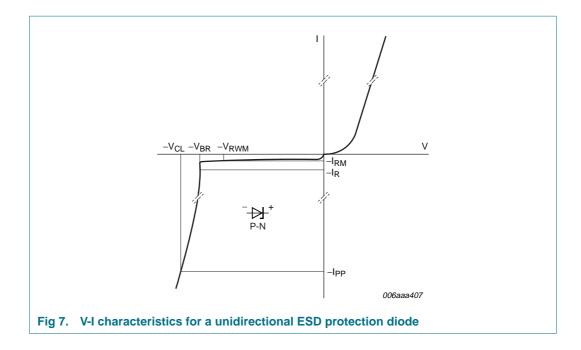

PESDXL4UF\_G\_W\_4


### Low capacitance unidirectional quadruple ESD protection diode arrays

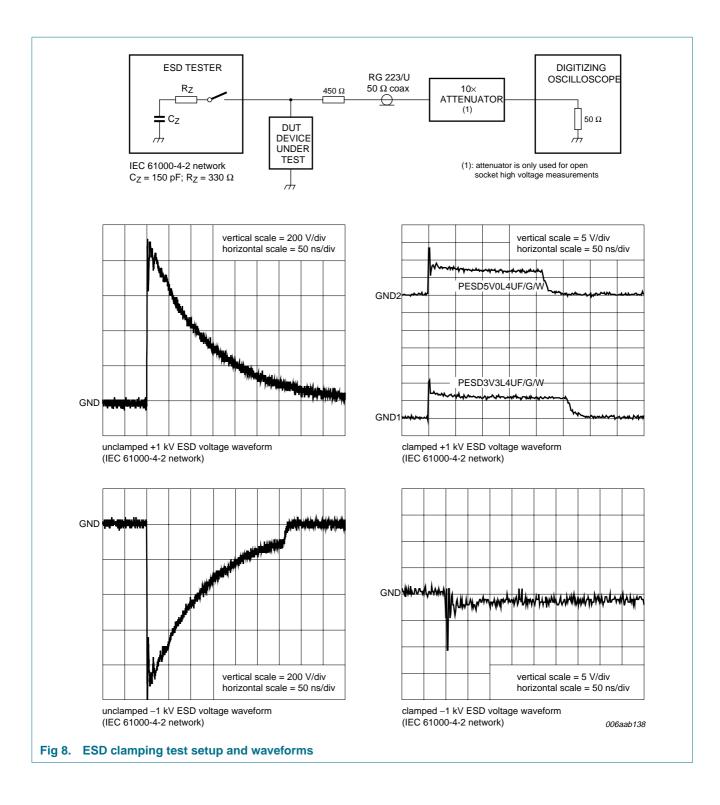

PESDXL4UF\_G\_W\_4

### 7. Application information

The devices are designed for the protection of up to four unidirectional data or signal lines from the damage caused by ESD and surge pulses. The devices may be used on lines where the signal polarities are both, positive and negative with respect to ground. The devices provide a surge capability of 30 W per line for an 8/20  $\mu$ s waveform each.

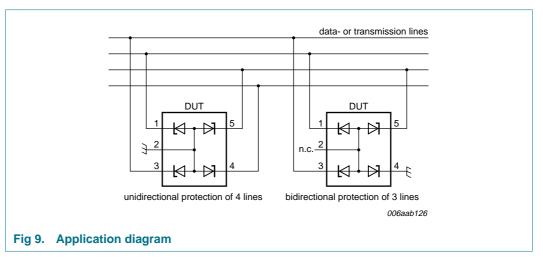


#### Circuit board layout and protection device placement

Circuit board layout is critical for the suppression of ESD, Electrical Fast Transient (EFT) and surge transients. The following guidelines are recommended:

- 1. Place the device as close to the input terminal or connector as possible.
- 2. The path length between the device and the protected line should be minimized.
- 3. Keep parallel signal paths to a minimum.
- 4. Avoid running protected conductors in parallel with unprotected conductors.
- 5. Minimize all Printed-Circuit Board (PCB) conductive loops including power and ground loops.
- 6. Minimize the length of the transient return path to ground.
- 7. Avoid using shared transient return paths to a common ground point.
- 8. Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.

### Low capacitance unidirectional quadruple ESD protection diode arrays

## 8. Package outline

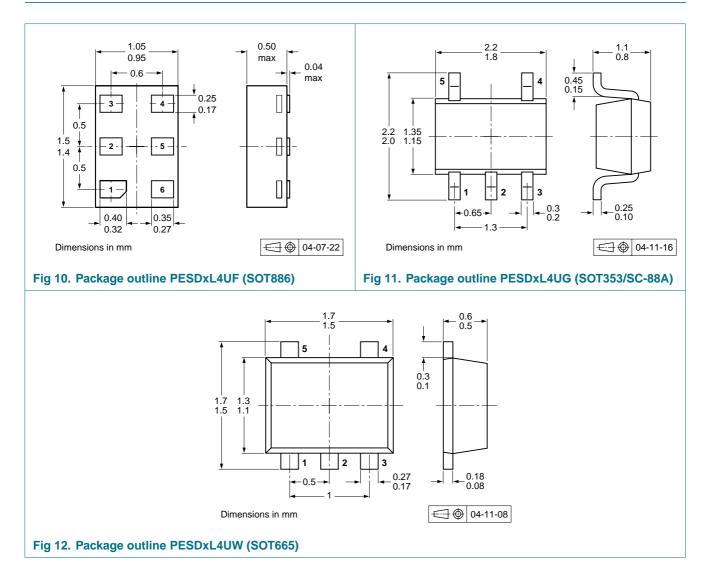

### 9. Packing information

#### Table 10. Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description	Packi				
			3000	4000	5000	8000	10000
PESD3V3L4UF	SOT886	4 mm pitch, 8 mm tape and reel; T1	1 -	-	-115	-	-
		4 mm pitch, 8 mm tape and reel; T4	1 -	-	-132	-	-
PESD5V0L4UF	SOT886	4 mm pitch, 8 mm tape and reel; T1	1 -	-	-115	-	-
		4 mm pitch, 8 mm tape and reel; T4	1 -	-	-132	-	-
PESD3V3L4UG	ESD3V3L4UG SOT353	4 mm pitch, 8 mm tape and reel; T1	<mark>l</mark> -115	-	-	-	-135
		4 mm pitch, 8 mm tape and reel; T2	-125	-	-	-	-165
PESD5V0L4UG	SOT353	4 mm pitch, 8 mm tape and reel; T1	<u>-115</u>	-	-	-	-135
		4 mm pitch, 8 mm tape and reel; T2	-125	-	-	-	-165
PESD3V3L4UW	SOT665	2 mm pitch, 8 mm tape and reel	-	-	-	-315	-
		4 mm pitch, 8 mm tape and reel	-	-115	-	-	-
PESD5V0L4UW	SOT665	2 mm pitch, 8 mm tape and reel	-	-	-	-315	-
		4 mm pitch, 8 mm tape and reel	-	-115	-	-	-


[1] For further information and the availability of packing methods, see Section 13.

[2] T1: normal taping

[3] T4: 90° rotated reverse taping

[4] T2: reverse taping


# 10. Soldering

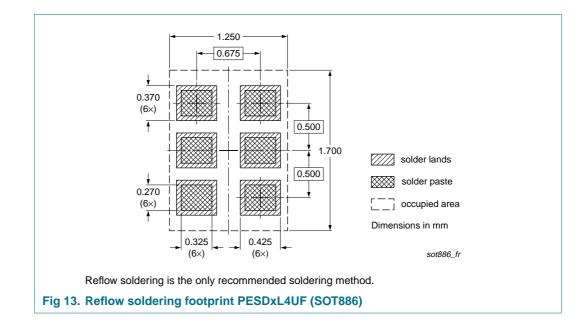

PESDXL4UF\_G\_W\_4


**Product data sheet** 

Low capacitance unidirectional quadruple ESD protection diode arrays

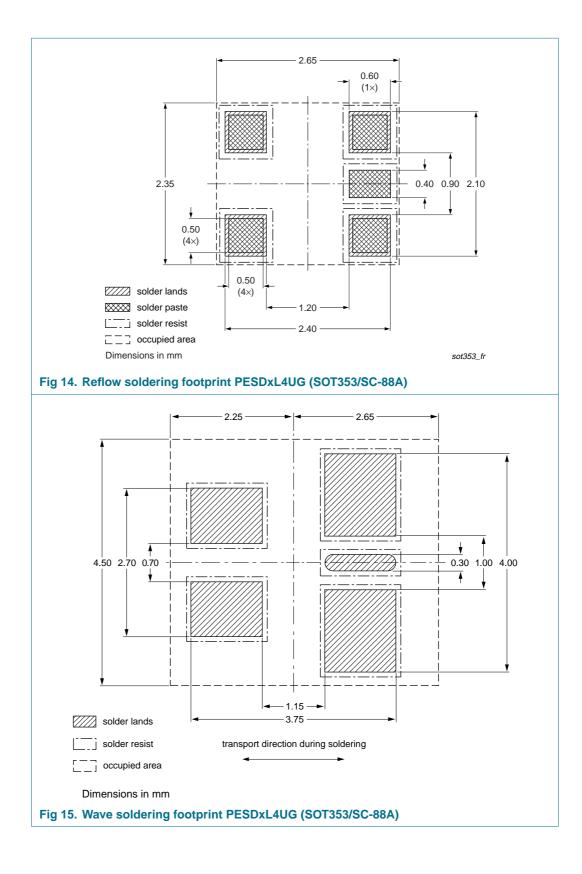

Product data sheet

### Low capacitance unidirectional quadruple ESD protection diode arrays

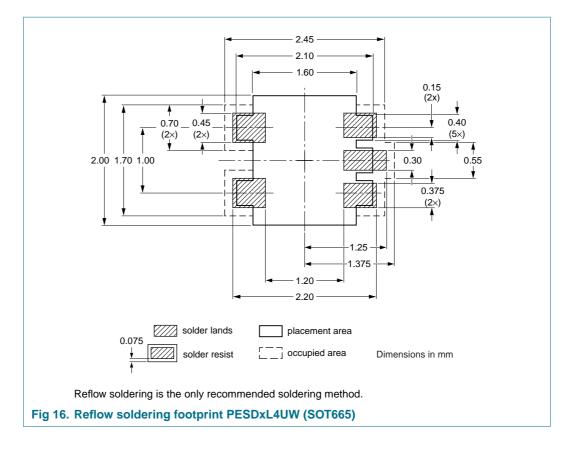

PESDXL4UF\_G\_W\_4

# **11. Revision history**

Table 11. Revision history					
Document ID	Release date	Data sheet status	Change notice	Supersedes	
PESDXL4UF_G_W_4	20080228	Product data sheet	-	PESDXL4UF_G_W_3	
Modifications:	<ul> <li>Figure 8 "ESI</li> </ul>	D clamping test setup and way	<u>eforms"</u> : amended		
PESDXL4UF_G_W_3	20080114	Product data sheet	-	PESDXL4UW_SER_2 PESDXL4UG_SERIES_1	
PESDXL4UW_SER_2	20040406	Product specification	-	PESDXL4UW_SERIES_1	
PESDXL4UG_SERIES_1	20040323	Product specification	-	-	

PESDXL4UF\_G\_W\_4

### 12. Legal information

### 12.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

### 12.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of

use of such information. **Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and

full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 12.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nexperia.com/profile/terms</u>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Nexperia. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### 13. Contact information

For additional information, please visit: http://www.nexperia.com

For sales office addresses, send an email to: salesaddresses@nexperia.com

PESDXL4UF\_G\_W\_4

Low capacitance unidirectional quadruple ESD protection diode arrays

### 14. Contents

1	Product profile 1
1.1	General description
1.2	Features
1.3	Applications 1
1.4	Quick reference data
2	Pinning information 2
3	Ordering information 3
4	Marking 3
5	Limiting values 3
6	Characteristics 5
7	Application information 10
8	Package outline 11
9	Packing information
10	Soldering 12
11	Revision history 15
12	Legal information 16
12.1	Data sheet status 16
12.2	Definitions
12.3	Disclaimers 16
12.4	Trademarks 16
13	Contact information 16
14	Contents 17

© Nexperia B.V. 2017. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 28 February 2008