
'ISHA



QUICK REFERENCE DATA								
Multiple module	Up to 7 modules							
Switch module	n/a							
Detent module	Yes							
Special A: linear, L: logarithmic, F: reverse logarithmic electrical laws and others see specification								
Sealing level	g level IP 64							
Lifespan	25K cycles							

FEATURES

- · Conductive plastic element
- Ultra compact (extra miniature module size)
- Multiple assemblies (up to seven modules)
- Shaft and panel sealed option
- · Center mechanical detent fully integrated in option
- Center tap option
- · Custom designs available on request
- Test according to CECC 41000 or IEC 60393-1
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

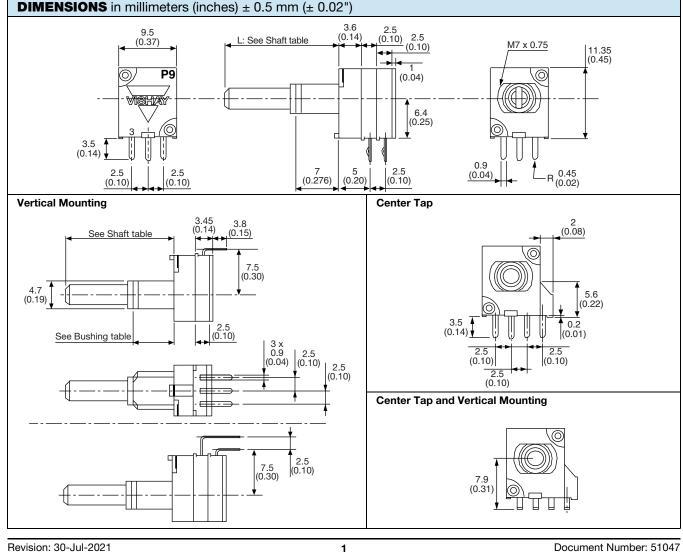

For technical questions, contact: sferpottrimmers@vishay.com

RoHS

COMPLIANT

P9

Vishay Sfernice



Vishay Sfernice

P9

GENERAL SPECIFICATIONS

AMBIENT TEMPERATURE (Circuit diagram ^a → → → ↔ → ↔ → ↔ → ↔ → ↔ → ↔ → ↔ → ↔ →					
Power rating chart Imeer Taper Circuit diagram Imeer Taper Circuit diagram Imeer Taper Circuit diagram Imeer Taper Ve 50 % Ve 50 % 0 % Imeer Taper 90 % Imeer Taper 10 % Imeer Tape	с				
Power rating chart For a standard For a stan					
Taper b $0 \rightarrow cw$ Taper $y_{K} + 50 + cw$ Resistance range Linear taper Non-linear taper 15° Resistance range Linear taper Non-linear taper 11° Tolerance 00 % On request 10 % Power rating at 70 °C Non-linear taper Multiple assemblies linear taper 0.1 W Non-linear taper 0.05 W per module Temperature coefficient (typical) ± 500 ppm Limiting element voltage 10 V _{DC} End resistance (typical) 3.0 Contact resistance variation Linear law (typical) Linear law (typical) 2.5 %					
Taper Vs % 50 % R R Vs % 50 % 20 % 10 % 20 % 10 % L 10 % 15 % Electrical travel 270 ° Mechanical travel 300 ° Resistance range Linear taper 1 kΩ to 1 MΩ Tolerance On request 10 % On request 10 % 20 % Power rating at 70 °C Non-linear taper 0.1 W Multiple assemblies inear taper 0.05 W per module Multiple assemblies non-linear taper 0.05 W per module Temperature coefficient (typical) ± 500 ppm Limiting element voltage 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) 2 % of nominal resistance	⊂ (3)				
$\begin{tabular}{ c c c c c } \hline Resistance range & Non-linear taper & 2.2 k\Omega to 500 k\Omega \\ \hline Tolerance & Standard & 20 \% \\ \hline On request & 10 \% \\ \hline Uinear taper & 0.1 W \\ \hline Non-linear taper & 0.05 W \\ \hline Non-linear taper & 0.05 W per module \\ \hline Multiple assemblies linear taper & 0.025 W per module \\ \hline Multiple assemblies non-linear taper & 0.025 W per module \\ \hline \hline Temperature coefficient (typical) & \pm 500 ppm \\ \hline Limiting element voltage & 10 V_{DC} \\ \hline End resistance (typical) & Linear law (typical) & 2 \% of nominal resistance \\ \hline Independent linearity & Linear law (typical) & \pm 5 \% \\ \hline Insulation resistance & 100 M\Omega at 250 V_{DC} \\ \hline \end{tabular}$					
$\begin{tabular}{ c c c c c } \hline Standard & 20 \% & & & & & & & & & & & & & & & & & & $,				
ToleranceOn request10 %Linear taper0.1 WPower rating at 70 °CNon-linear taper0.05 W per moduleMultiple assemblies linear taper0.05 W per moduleMultiple assemblies non-linear taper0.025 W per moduleMultiple assemblies non-linear taper0.025 W per moduleTemperature coefficient (typical)± 500 ppmLimiting element voltage10 V _{DC} End resistance (typical)10 V _{DC} Contact resistance variationLinear law (typical)Linear law (typical)2 % of nominal resistanceIndependent linearityLinear law (typical)Insulation resistance100 MΩ at 250 V _{DC}	2				
$\begin{array}{c c} \mbox{Linear taper} & 0.1 \ W \\ \mbox{Non-linear taper} & 0.05 \ W \\ \mbox{Multiple assemblies linear taper} & 0.05 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ module \\ \mbox{Multiple assemblies non-linear taper} & 0.025 \ W \ per \ p$					
Non-linear taper 0.05 W Multiple assemblies linear taper 0.05 W per module Multiple assemblies non-linear taper 0.025 W per module Multiple assemblies non-linear taper 0.025 W per module Temperature coefficient (typical) 10 V _{DC} Limiting element voltage 50 V _{AC} End resistance (typical) 10 S Q Contact resistance variation Linear law (typical) Independent linearity Linear law (typical) Insulation resistance 10 MQ at 250 V _{DC}					
Power rating at 70 °C Multiple assemblies linear taper 0.05 W per module Multiple assemblies non-linear taper 0.025 W per module Temperature coefficient (typical) ± 500 ppm Limiting element voltage 10 V _{DC} End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Multiple assemblies non-linear taper 0.025 W per module Temperature coefficient (typical) ± Limiting element voltage 10 V _{DC} End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Limiting element voltage 10 V _{DC} 50 V _{AC} 50 V _{AC} End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Limiting element voltage 10 V _{DC} 50 V _{AC} 50 V _{AC} End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Limiting element voltage 50 V _{AC} End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) Independent linearity Linear law (typical) Insulation resistance 100 MΩ at 250 V _{DC}					
End resistance (typical) 3 Ω Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Contact resistance variation Linear law (typical) 2 % of nominal resistance Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}					
Independent linearity Linear law (typical) ± 5 % Insulation resistance 100 MΩ at 250 V _{DC}	ance				
Insulation resistance $100 \text{ M}\Omega \text{ at } 250 \text{ V}_{\text{DC}}$					
	00				
Dielectric strength 300 V _{AC} during 1 min					
Attenuation (typical) 90 dB max./0.05 dB min.					

Revision: 30-Jul-2021

2

Document Number: 51047

P9

MECHANICAL SPECIFICATIONS

Mechanical endurance	25 000 cycles min.				
Mechanical travel	300° ± 5				
Operating torque	0.2 Ncm to 1.5 Ncm (0.3 ozinch to 1.8 ozinch)				
End stop torque	50 Ncm max. (4.4 lb-inch max.)				
Shaft push/pull force	7 DaNcm max. (15.7 lbf max.)				
Weight (one module)	6.25 g (without nut and washer) (0.22 oz.)				

Note

· Nothing stated herein shall be construed as a guarantee of quality or durability

ENVIRONMENTAL SPECIFICATIONS						
Temperature range	-55 °C to +100 °C					
Climatic category	55/100/21					
Sealing	IP 64					

MARKING

- Code for tolerance
- Code for ohmic value
- Taper
- Code for date code

PACKAGING Box of 25 pieces Box of 100 pieces Hardware: puts washer, and O-ring are separately supplied

Hardware: nuts, washer, and O-ring are separately supplied (not mounted on the potentiometer), in a small bag placed in the packaging.

PERFORMANCE								
TESTS	CONDITIONS	TYPICAL VALUE AND DRIFTS						
12515	CONDITIONS	∆ R⊺/R⊺ (%)	∆ R ₁₋₂ / R ₁₋₂ (%)	OTHER				
Electrical endurance	1000 h at rated power 90'/30' - ambient temp. 70 °C	±5%	± 10 %	Contact resistance variation < 5 % Rn				
Damp heat, steady state	21 days at 40 °C ± 2 °C and 90 % to 95 % relative humidity	±5%	-	Insulation resistance $> 10 M\Omega$				
Change of temperature	Ambient temperature -55 °C to +100 °C 5 cycles	± 0.5 %	-	-				
Mechanical endurance	25 000 cycles at rated power 90 % of electrical travel 16 cycles per minute Temperature: 20 °C	±6%	-	Contact resistance variation ± 12 %				
Shock	50 g's, 11 ms 3 shocks - 3 directions	± 0.2 %	± 0.5 %	-				
Vibration	10 Hz to 55 Hz 0.75 mm or 10 <i>g</i> 's 6 h	± 0.2 %	-	$\Delta V_{1-2}/V_{1-3} \pm 0.5 \%$				

Revision: 30-Jul-2021


3


Document Number: 51047



Vishay Sfernice

P9

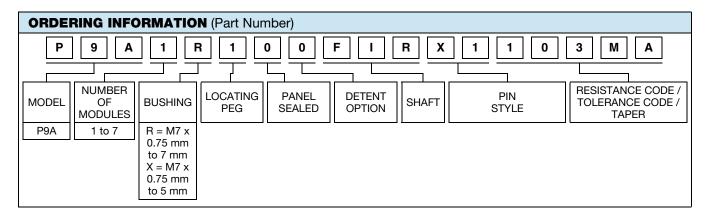

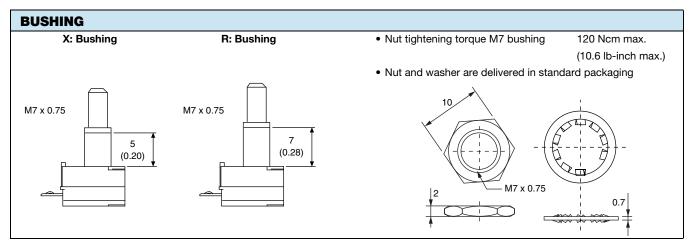


4 For technical questions, contact: <u>sferpottrimmers@vishav.com</u>

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Vishay Sfernice


PQ

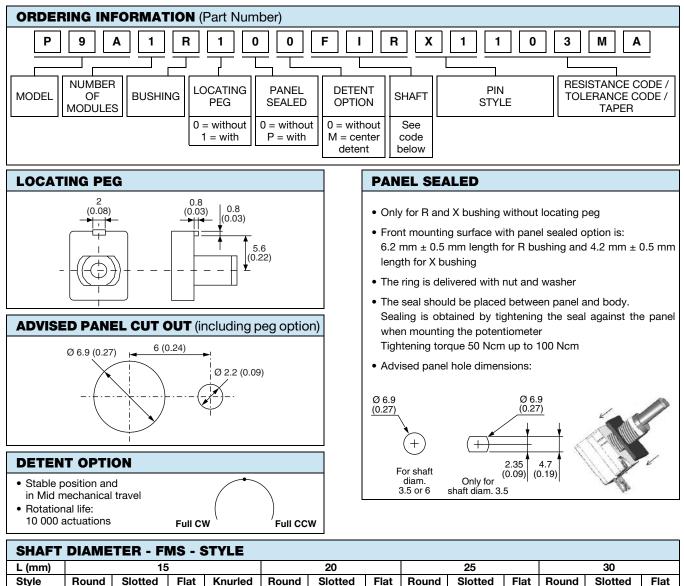

SHAFT	DIAME	TER - FI	MS - S	STYLE									
L (mm)		15	5		20				25		30		
Style	Round	Slotted	Flat	Knurled	Round	Slotted	Flat	Round	Slotted	Flat	Round	Slotted	
Ø 3.5	DFR	DFS	DFF	-	DIR	DIS	DIF	DLR	DLS	DLF	DMR	DMS	
Ø6	FFR	FFS	FFF	FGK ⁽¹⁾	FIR	FIS	FIF	FLR	FLS	FLF	FMR	FMS	

Note

⁽¹⁾ For X bushing (16 mm)

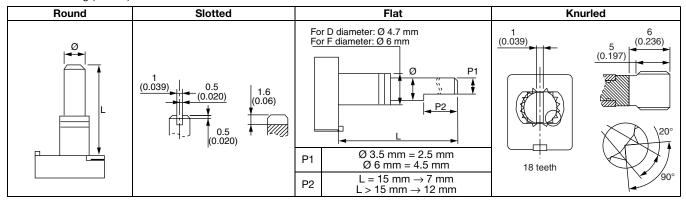

Revision: 30-Jul-2021

5


Document Number: 51047


DMF FMF



Vishay Sfernice

P9

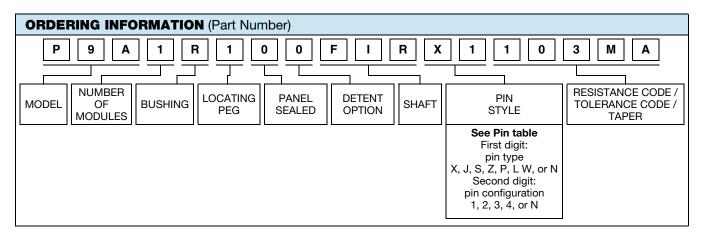

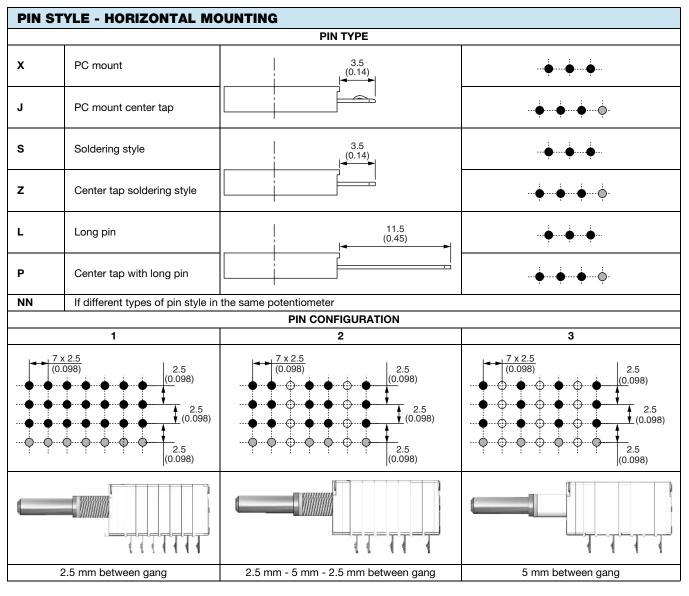

Revision: 30-Jul-2021


6


Document Number: 51047



Vishay Sfernice

P9

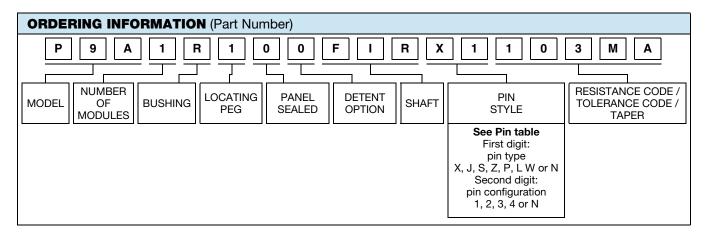

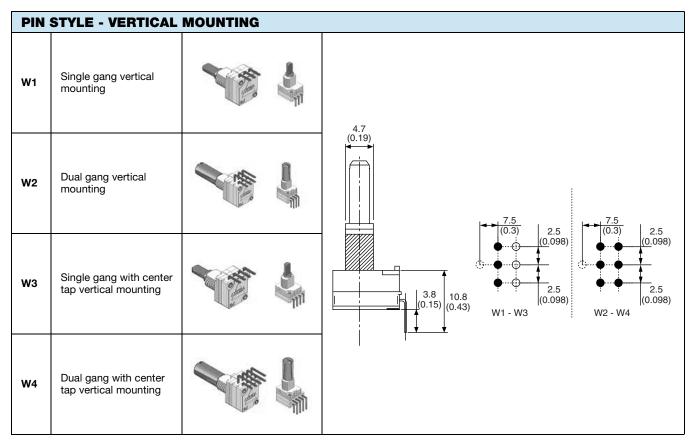


7



Vishay Sfernice

P9

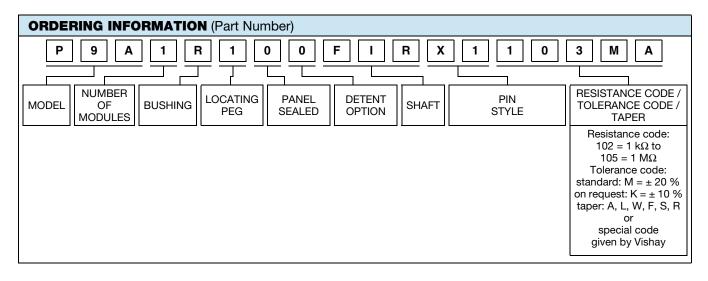

SPECIAL CODES GIVEN BY VISHAY

- · Custom shaft
- Design on request
- Specific linearity
- Specific interlinearity
- Specific variation law

PAR	PART NUMBER DESCRIPTION (for information only)													
P9A	1	R	1	0	0	FI	R	X1	10K	20 %	А			e3
MODEL	MODULES	BUSHING	LOCATING PEG	SEALING OPTIONS	DETENT OPTIONS	SHAFT	SHAFT	LEADS	VALUE	TOL.	TAPER	SPECIAL	SPECIAL	LEAD (Pb)- FREE

RELATED DOCUMENTS	
APPLICATION NOTES	
Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029

8



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.